

ANYWAY FLOOR

CATALOGUE

■
Anyway,
Give you more
than expected!





COMPANY HISTORY

ANYWAY FLOOR CO., LTD. IS A PROFESSIONAL MANUFACTURER OF VINYL FLOORING, WPC FLOOR AND SPC FLOORS SINCE 2005.

OUR PRODUCTS HAVE OBTAINED ISO9001, ISO14001 AND CE CERTIFICATES. OUR COMPANY COVERS AN AREA OF AROUND 15,000 SQUARE METERS. OUR ANNUAL OUTPUT IS OVER 2,000 TEUS. WE CAN MEET DIFFERENT DEMANDS OF OUR CUSTOMERS AND MEANWHILE WE CAN PROVIDE OEM SERVICE.

WITH HIGH QUALITY AND COMPETITIVE PRICE, WE HAVE CLIENTS FROM ALL AROUND THE WORLD. OUR PRODUCTS ARE SOLD WELL IN WESTERN EUROPE, NORTH AMERICA, MIDDLE EAST, SOUTHEAST ASIA, AND AFRICA. PLEASE FEEL FREE TO CONTACT US FOR MORE INFORMATION. WE LOOK FORWARD TO RECEIVING YOUR CORRESPONDENCES SOON!



Technical Data Sheet



| ITEM | STANDARD | RESULT |
|----------------------------------------------|--------------------|---------|
| Side Length | | Pass |
| Squareness | ISO 24342 | Pass |
| Straightness | | Pass |
| Overall Thickness | ISO 24346 | Pass |
| Total Mass Per Unit Area(average) | ISO 23997 | Pass |
| Dimensional Stability after Exposure to Heat | ISO 23999 | Pass |
| Curling after Exposure to Heat | | Pass |
| Flexibility | ISO 24344 Method A | Pass |
| Residual Indentation | ISO 24343-1 | Pass |
| Color Fastness to Artificial Light | ISO 105-B02 | Pass |
| Thickness of Wear Layer | ISO 24340 | Pass |
| Abrasion Group | EN 649 | Group T |
| Abrasion Resistance | EN 660-2 | Pass |
| Flammability | EN 13501-1 | Bfl-S1 |
| Dynamic Coefficient of Friction | EN 13893 | Pass |
| Slipperiness-Oil-wet ramp test | DIN 51130 | R9 |
| Thermal Conductivity | EN 12667 | Pass |
| Water-tightness | EN 13553 | Pass |
| Caster Chair Test | ISO 4918 | Pass |

ENVIRONMENT & SAFETY

| ITEM | STANDARD | RESULT |
|------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|
| N-pentyl-isopentyl phthalate(nPIPP) | EN 14372 | ND |
| Dipentyl phthalate(DPP) | | ND |
| Bis(2-methoxyethyl)phthalate(DMEP) | | ND |
| Diisobutyl phthalate(DBP) | | ND |
| Di(2-ethyl hexyl)Phthalate(DEHP) | | ND |
| Benzyl Butyl Phthalate(BBP) | | ND |
| Di-iso-nonyl Phthalate(DINP) | | ND |
| Di-n-Octyl Phthalate(DNOP) | | ND |
| Di-iso-decyl Phthalate(DIDP) | | ND |
| 1,2-benzenedicarboxylic,di-C6-8-branched alkyl esters,C7-rich(DIHP)Toxic | | ND |
| 1,2-benzenedicarboxylic,di-C7-11-branched and linear alkyl esters,(DHNUP) | | ND |
| Di-n-hexyl Phthalate(DnHP) | EN 71 part3 | ND |
| Di-n-pentyl Phthalate(DnPP) | | ND |
| 1,2-benzenedicarboxylic,di-C6-10-alkyl esters;1,2-benzenedicarboxylic,Mixed decyl and hexyl and octyl diesters≥0.3% of dihexyl phthalate | | ND |
| Soluble aluminum (Al) | | ND |
| Soluble Antimony (Sb) | | ND |
| Soluble Arsenic (As) | | ND |
| Soluble Barium (Ba) | | ND |
| Soluble Boron (B) | | ND |
| Soluble Cadmium (Cd) | ND | |

ENVIRONMENT & SAFETY

| ITEM | STANDARD | RESULT |
|----------------------------------------|-------------|----------|
| Soluble Chromium (III)(Cr (III)) | EN 71 part3 | ND |
| Soluble Chromium (VI)(Cr (VI)) | | ND |
| Soluble Cobalt (Co) | | ND |
| Soluble Copper (Cu) | | ND |
| Soluble Lead (Pb) | | ND |
| Soluble Manganese (Mn) | | ND |
| Soluble Mercury (Hg) | | ND |
| Soluble Nickel (Ni) | | ND |
| Soluble Organic Tin | | ND |
| Soluble Selenium (Se) | | ND |
| Soluble Strontium (Sr) | | ND |
| Soluble Tin (Sn) | | ND |
| Soluble Zinc (Zn) | | ND |
| Toxic Test | | GB 18586 |
| ROHS 2.0 | 2011/65/EU | PASS |
| Resistance to Chemicals | EN 423 | Class0 |
| CE Mark | EN 14041 | PASS |

FEATURES&BENEFITS:


WATERPROOF
CORE




SOUND
REDUCING PAD



FAST&SECURE
CLIP SYSTEM

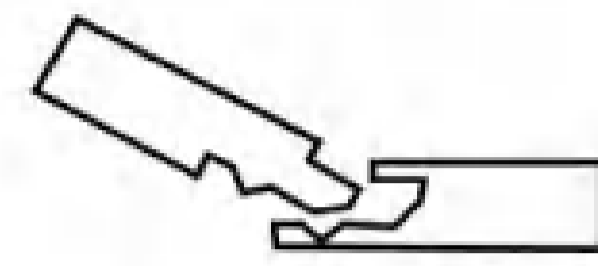


BEVELED
EDGE

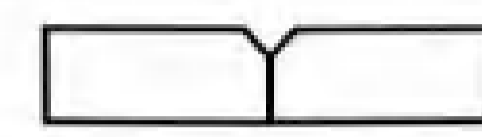

EZ-CLEAN
COATING



LIFETIME
WARRANTY

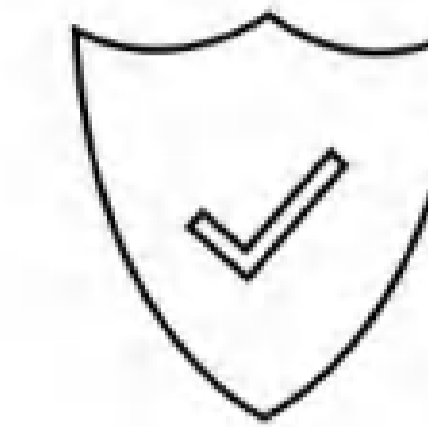

FLOORSCORE
CERTIFIED



LEED POINT
ELIGIBLE



SPECIFICATIONS:

| | |
|-------------------|-------------------------------------------------------------|
| ITEM | 100% WATERPROOF VIRGIN MATERIAL CLICK RIGID CORE FLOORING |
| SIZE | 6"X36",7"X48" |
| THICKNESS | 4.0MM / 4.5MM / 5.0MM / 5.5MM / 6MM |
| WEARLAYER | 0.3MM / 0.5MM |
| SURFACE TREATMENT | UV / PU COATING WITH MATT / SEMI-MATT FINISH |
| SURFACE TEXTURE | WOOD EMBOSSED / HAND SCRAPED / EIR / SAW CUT / CERAMIC BEAD |
| INSTALLATION | UNILIN/VALINGE |
| WARRANTY | RESIDENTIAL 20 YEARS , COMMERCIAL 10 YEARS |

TECHNICAL DATA:

| TEST ITEM | TEST STANDARD | TEST RESULTS |
|--------------------------------|---------------|---------------------------------------|
| Slip Resistance | EN13893 | Class DS |
| Formaldehyde | EN717 | E1 |
| Smoke Generation | ENISO9239-1 | Class S1 |
| Critical Heat Flux | ENISO9239-1 | Class B |
| Flame Spread | ENISO11925-2 | Class B |
| Reaction to Fire | EN13501-1 | Bf1- S1 |
| Abrasion Resistance | EN13329 | Class 23/43 |
| Resistance to Stain | EN423 | Resistant |
| Chemical Resistance | EN434 | X direction:-0.04%/Y direction:-0.02% |
| Demensional Stability | EN434 | ~0.01mm |
| Curling after Exposure to Heat | EN434 | ~0.01mm |
| Wear Resistance | EN660-2 | Group T |
| Residual Indentation | EN433 | ~0.03mm (LVT click) |
| Chair Caster | EN425 | Typ W |
| Color fastness | ISO105-B02 | >=6 |

UV Layer

Ensure wuperior stain-resistant and water-proof performance,saving maintenanse coasts.

Transparent Wear Layer

Restore the authentic color and embossing, protecting it from abrasion.

Decoration Layer

Regardless of natural wood or stone structure,we offer a variety of pattern choices that will better showcase your personality.

SPC Core

Prevent expansion and contraction of the flooring,cover sub-floor imperfection.

IXPE(Optional)

Better sound absorption and exellent underfoot feeling.

SPC

RECOMENDED FOR:


- MULTI-FAMILY
- CONDOMINIUMS
- STUDENT HOUSING

SPC Click Flooring

SPC rigid vinyl flooring (Rigid Core LVP) is the latest upgrade and improvement of the Luxury Vinyl Tiles (LVT). It's in fact considered to be the new trend in floor covering. The main content of spc are natural limestone powder, polyvinyl chloride and stabilizer which combined by a certain ratio to provide us a very stable composite material.


It is made up of 5 layers which includes the optional padding, SPC Core, decor printing film with excellent design, wear layer with super strong vinyl, and of course the UV protective layer.

It is more durable than a traditional vinyl flooring, SPC rigid vinyl flooring is also indentation resistant and 100% waterproof which is very ideal for kitchens and bathrooms. Also, take note that SPC rigid vinyl flooring can be easily installed on different types of floor base. It's formaldehyde free, completely safe flooring covering materials for both residential and public environment.

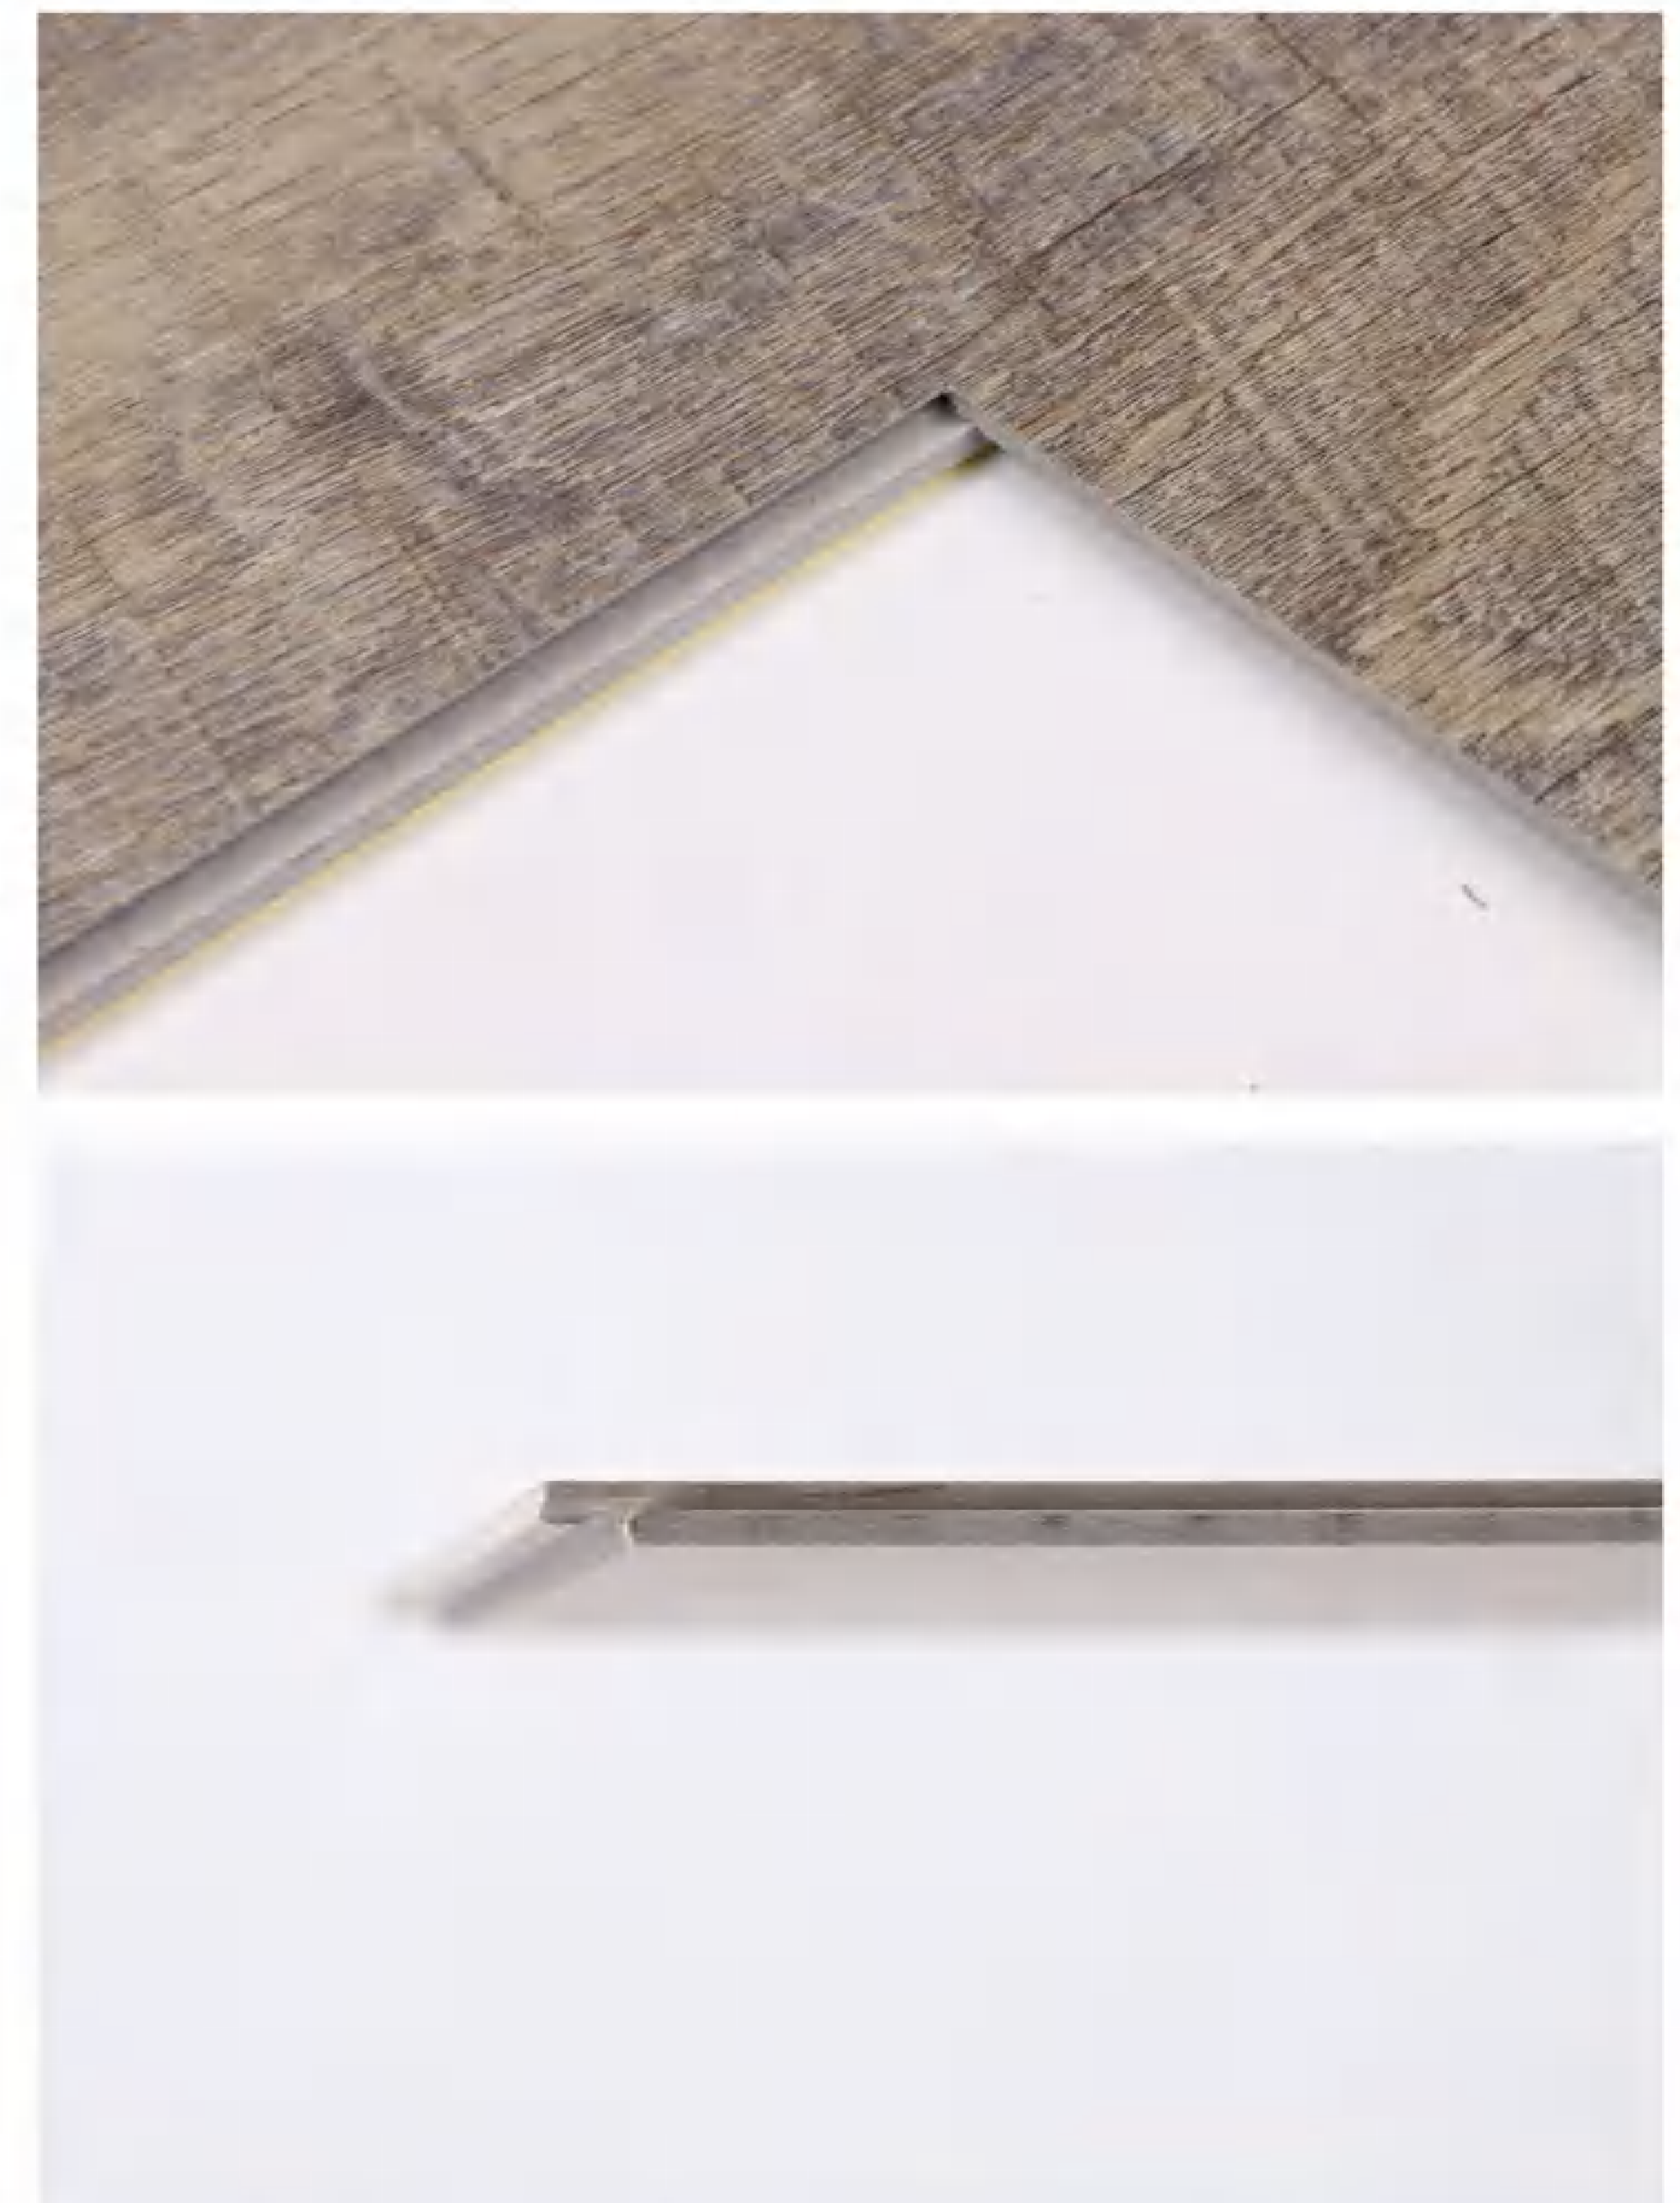

Padding of SPC Flooring


1.5mm or 2mm EVA optional/ 1.5mm IXPE optional/ 1.5mm cork optional

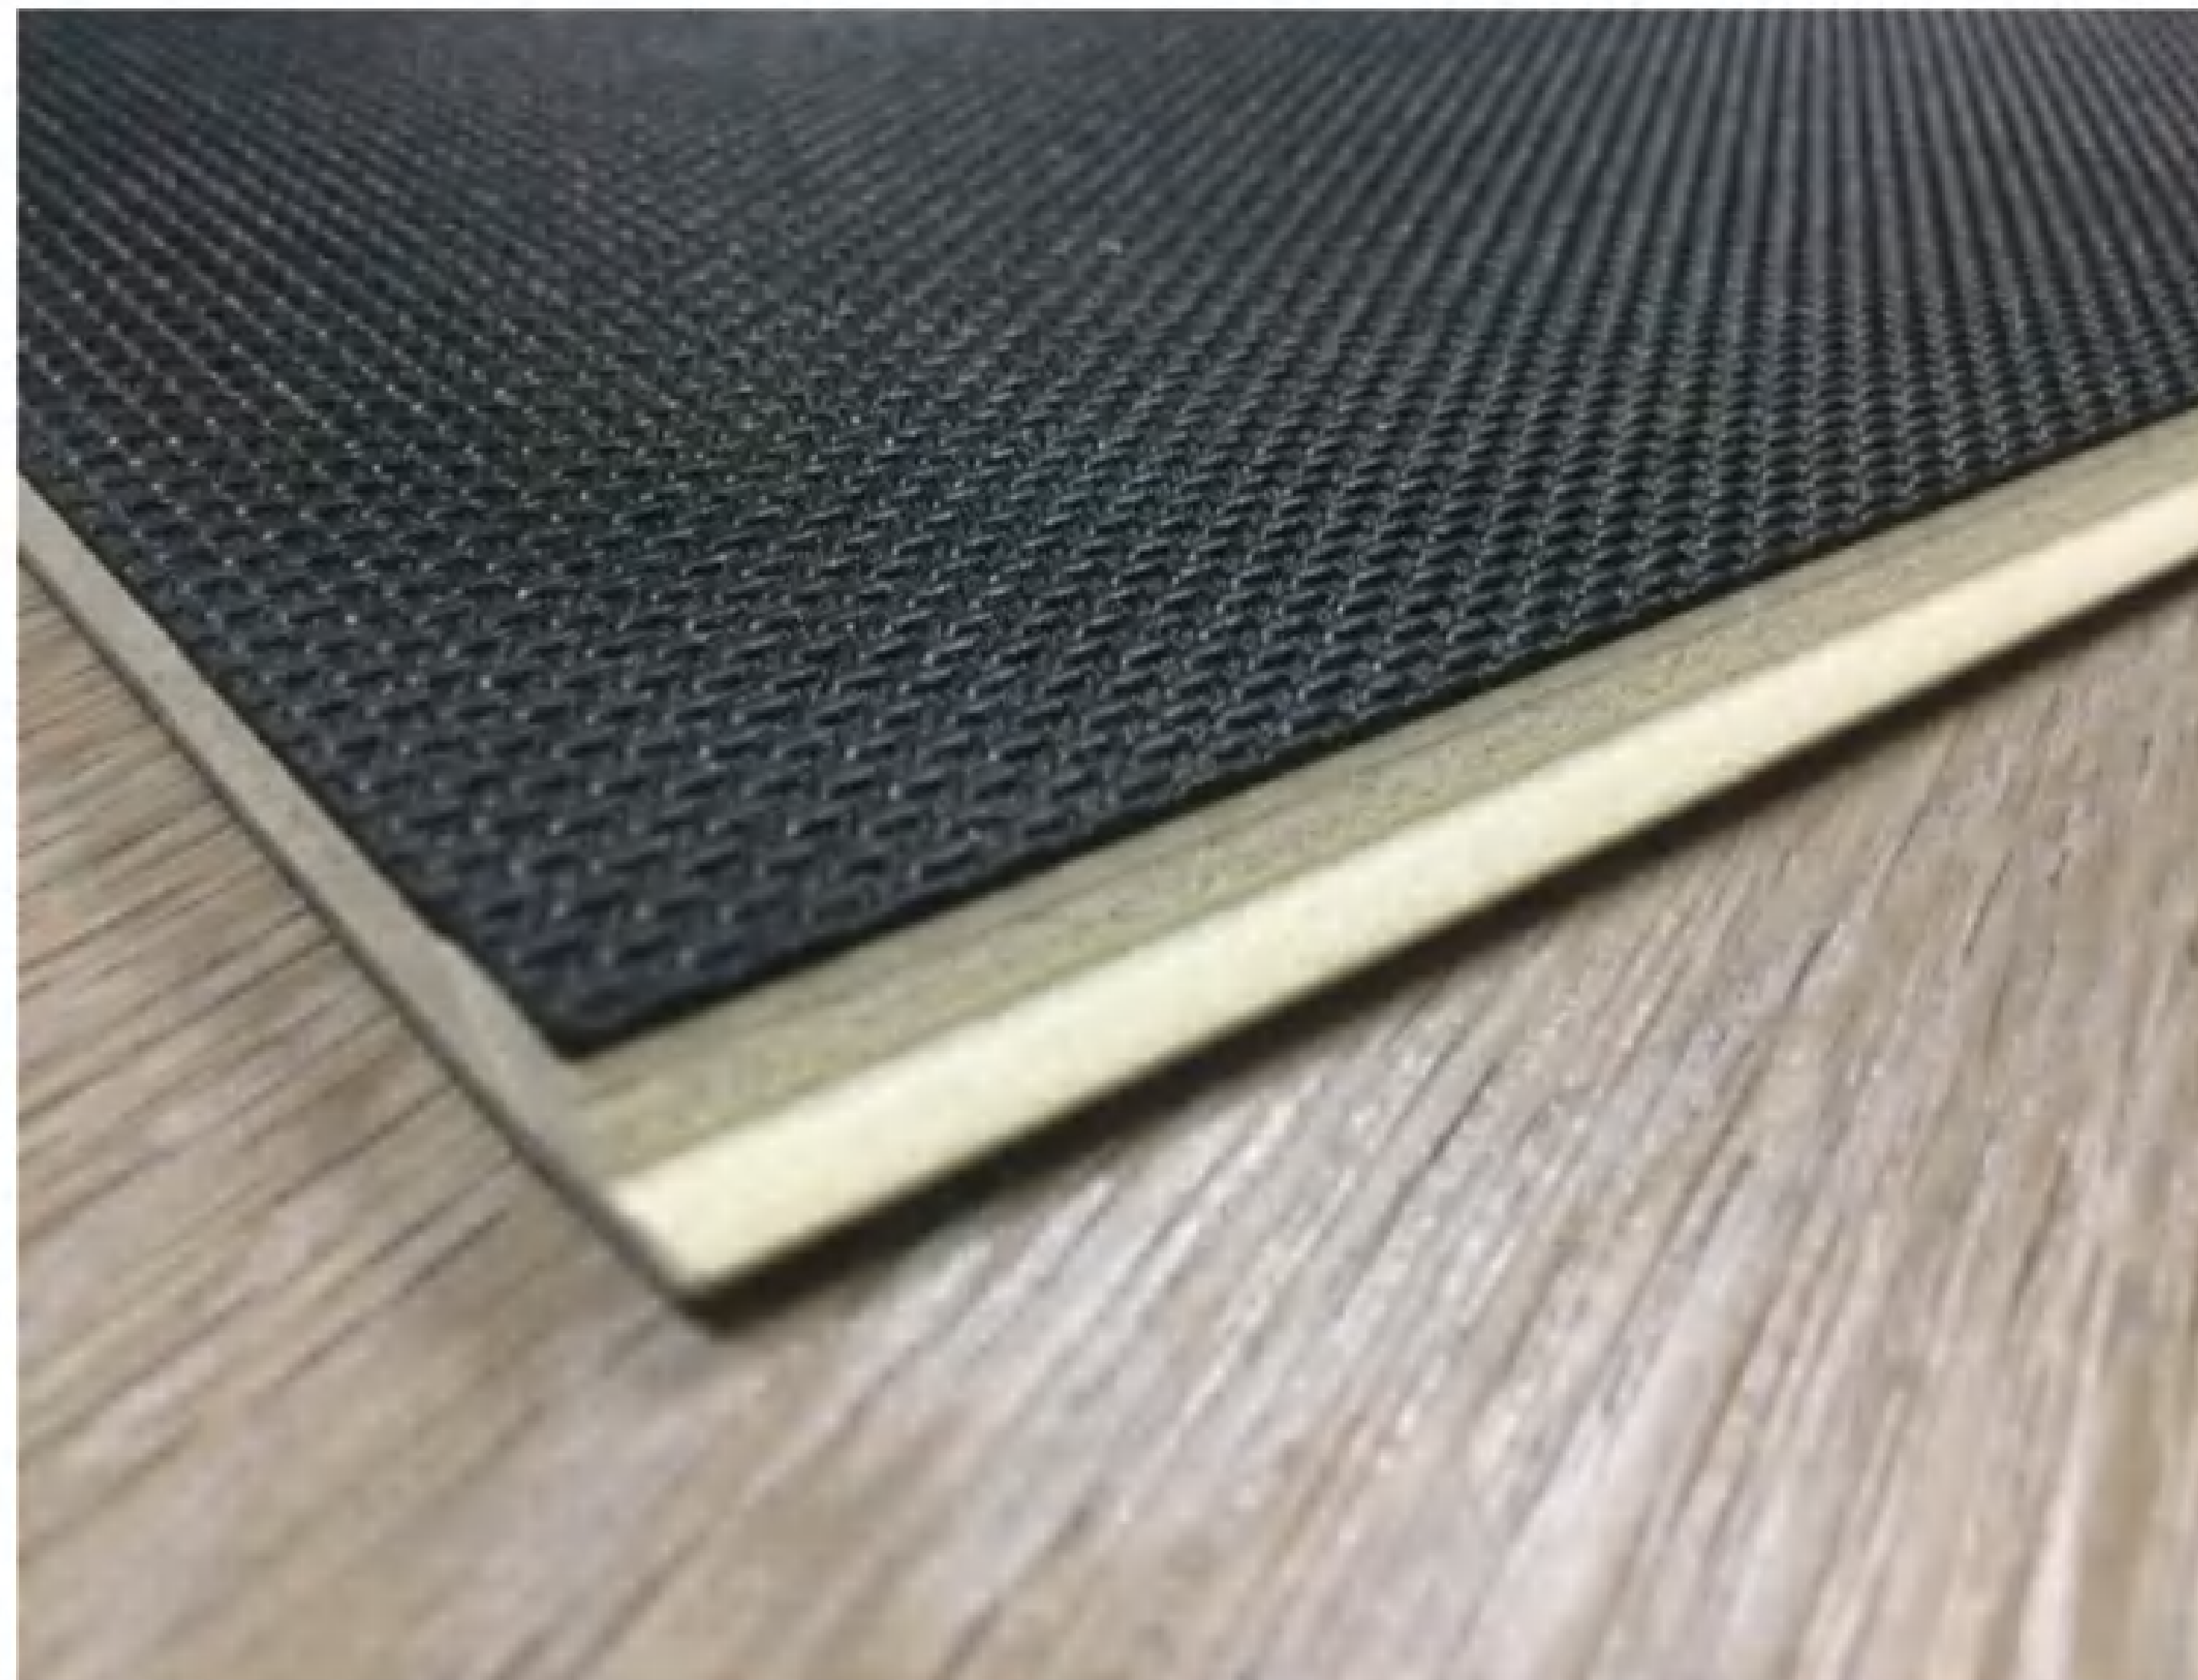

1.5mm IXPE(WOVEN)



1.5mm IXPE(SMOOTH)

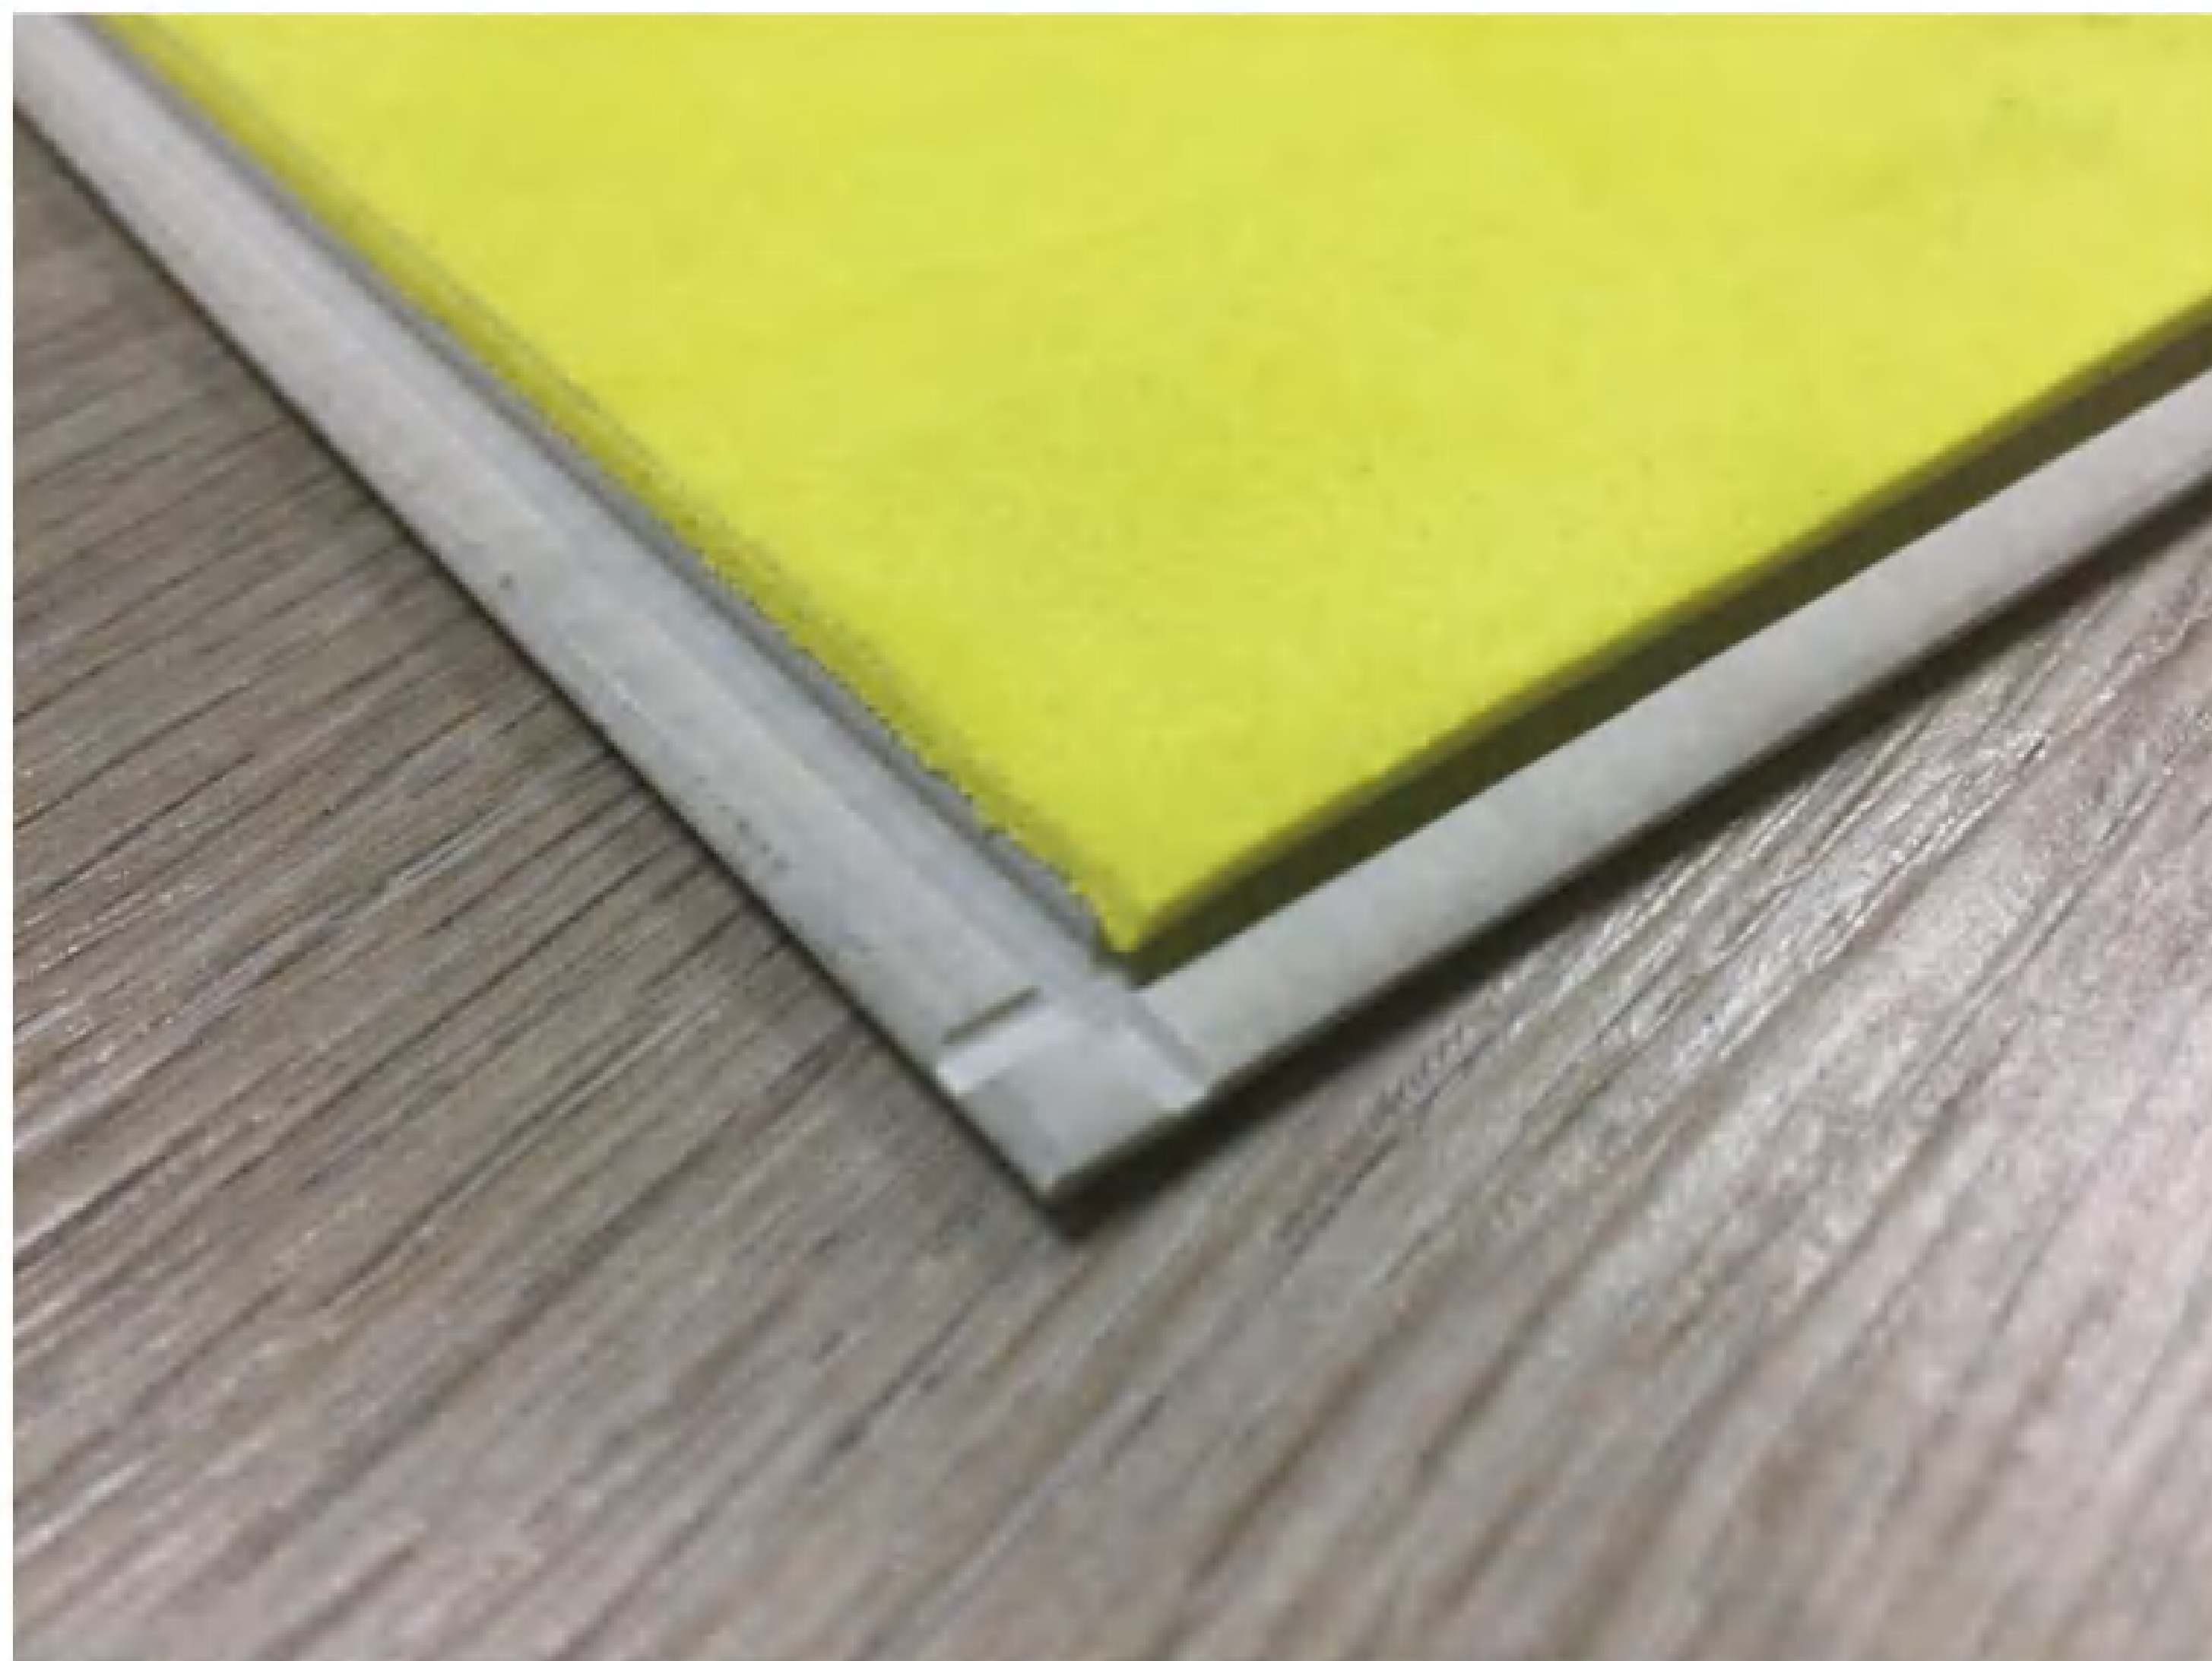

1.5mm EVA(YELLOW)



1.5mm CORK OPTIONAL

FEATURES&BENEFITS:

WATERPROOF
CORE




SOUND
REDUCING PAD



FAST&SECURE
CLIP SYSTEM




BEVELED
EDGE

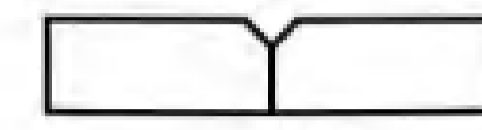

EZ-CLEAN
COATING




LIFETIME
WARRANTY

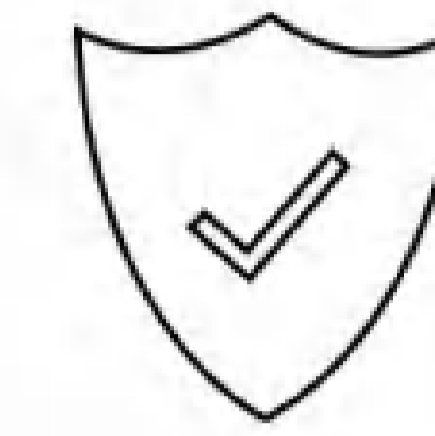

FLOORSCORE
CERTIFISD



LEED POINT
ELIGIBLE

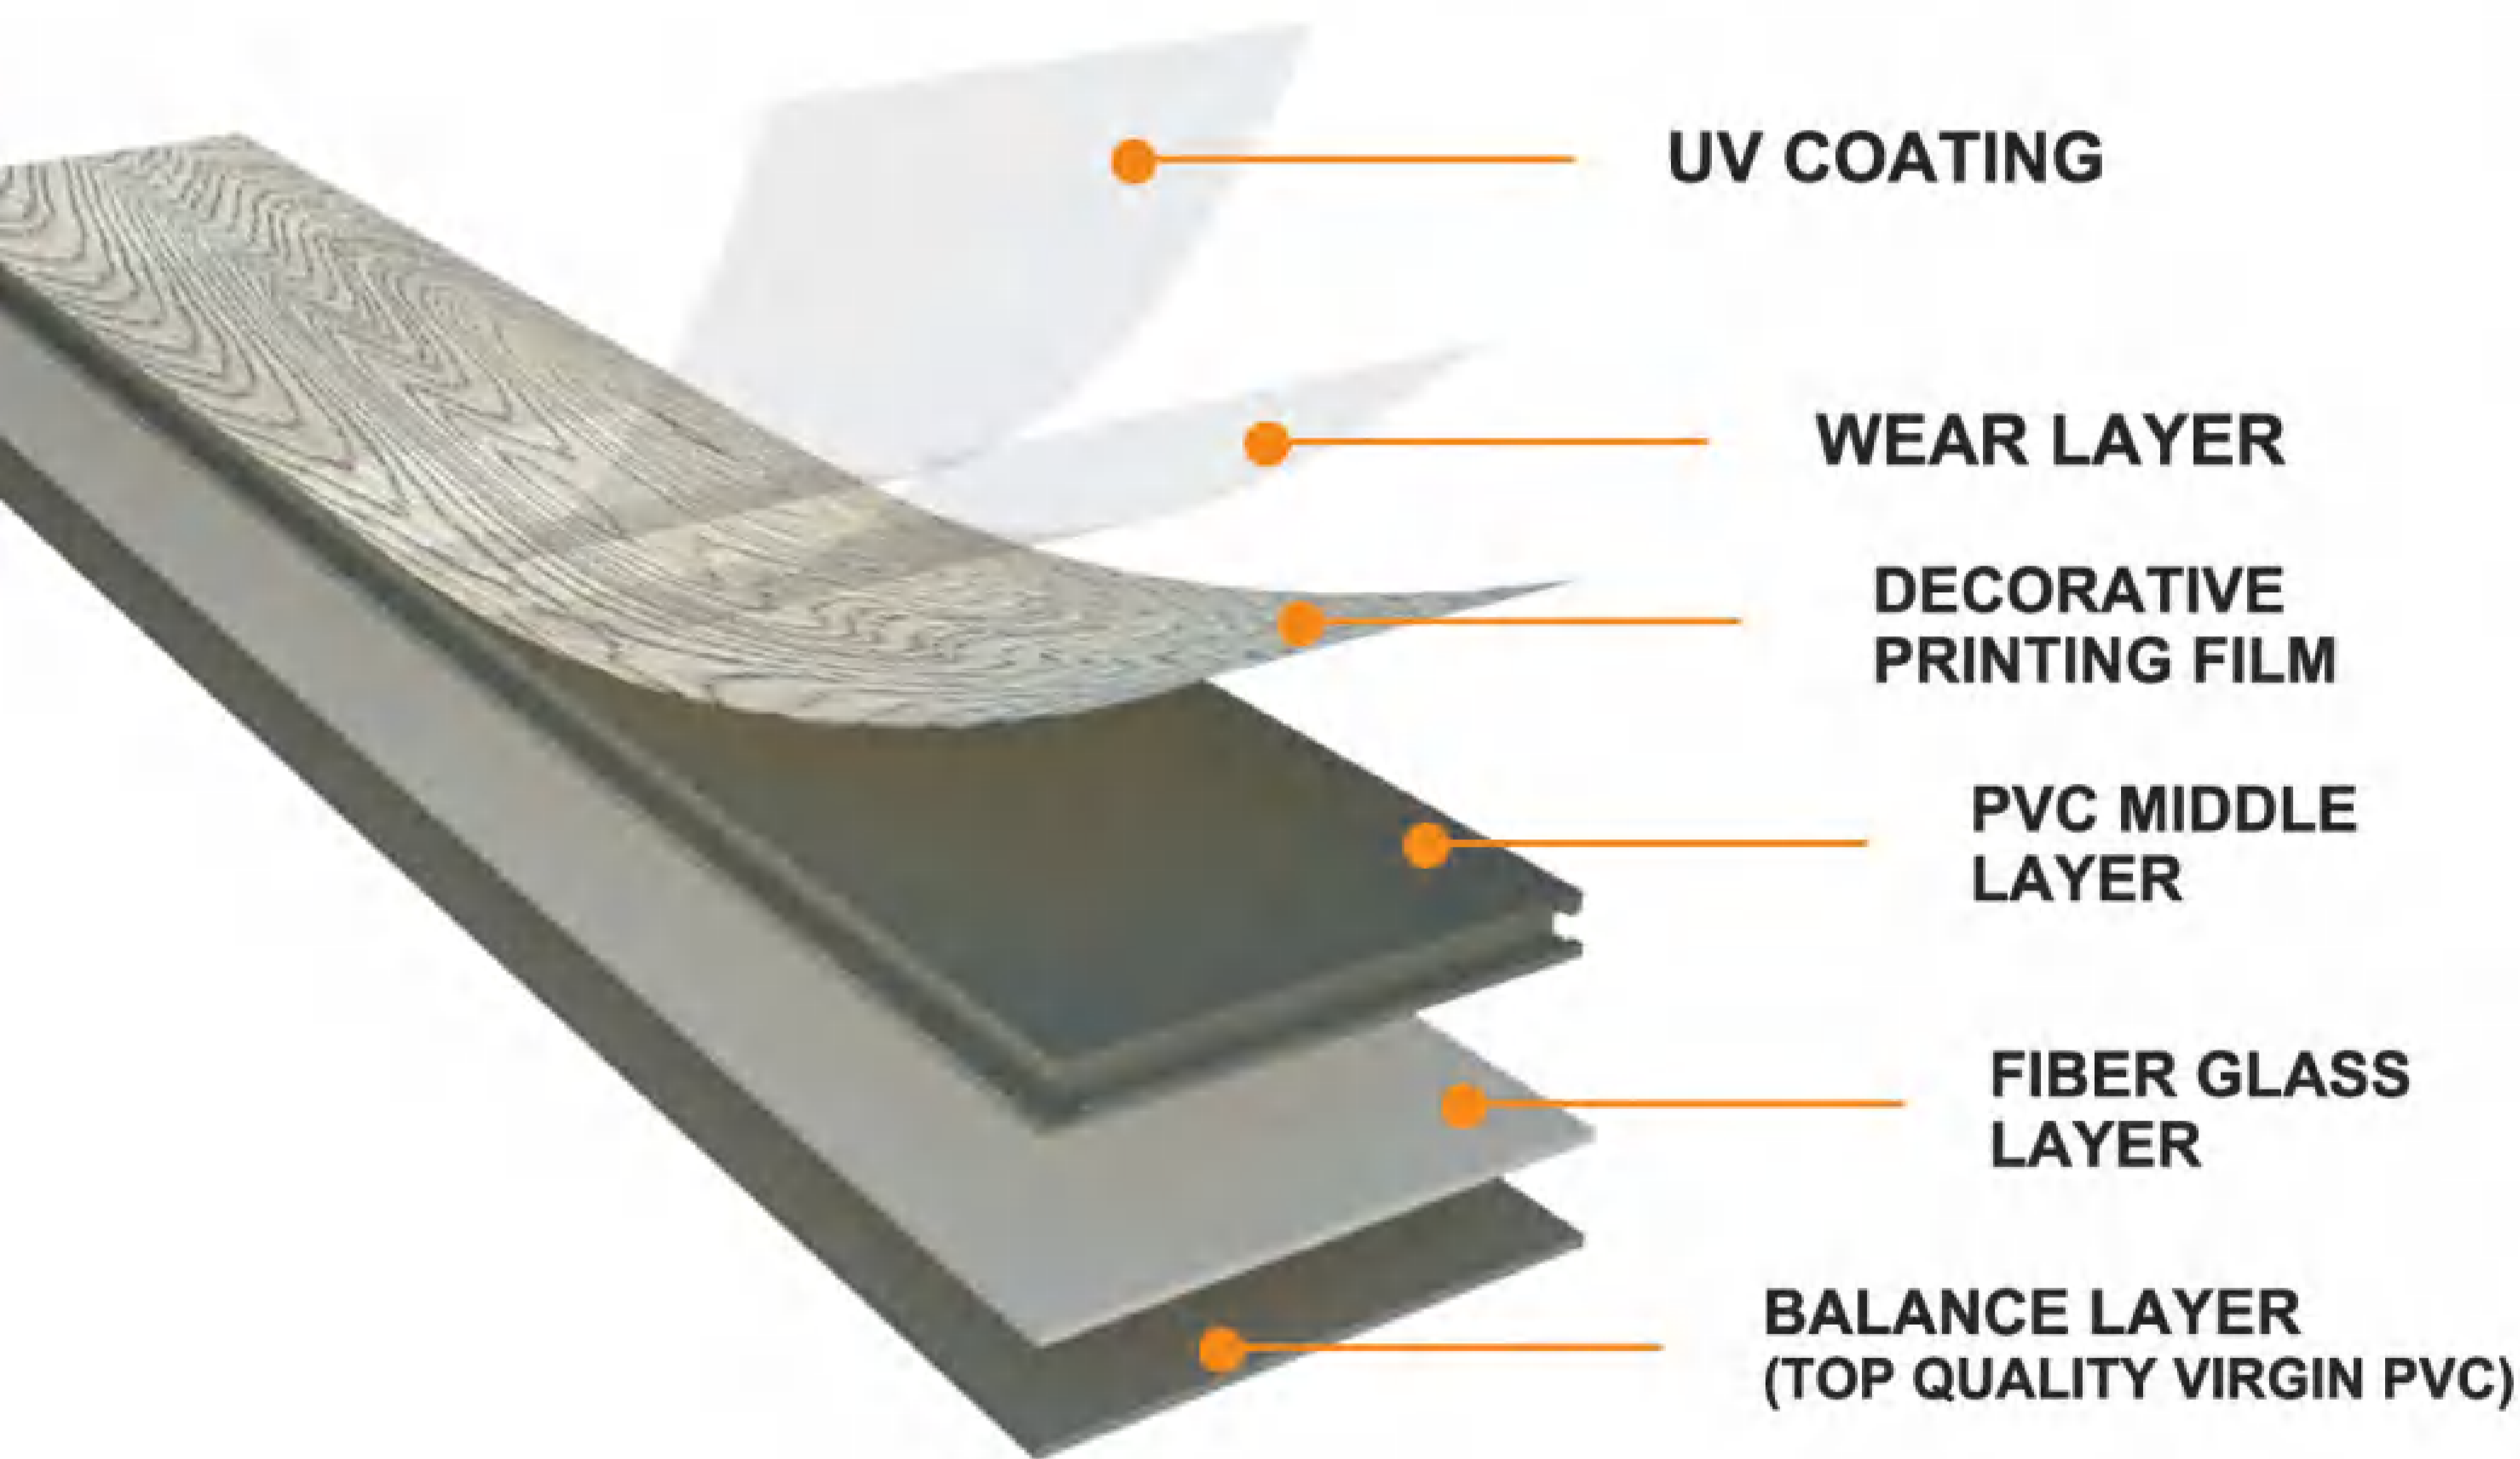

MORE SPECIFICATIONS OPTIONS:

| | |
|-------------------|-------------------------------------------------------------|
| ITEM | PVC VINYL CLICK FLOOR |
| SIZE | 6"X36" / 6"X48 / 7"X48" |
| THICKNESS | 4.0MM / 4.5MM / 5.0MM |
| WEARLAYER | 0.3MM / 0.5MM / 0.7MM |
| SURFACE TREATMENT | UV / PU COATING WITH MATT / SEMI-MATT FINISH |
| SURFACE TEXTURE | WOOD EMBOSSED / HAND SCRAPED / EIR / SAW CUT / CERAMIC BEAD |
| INSTALLATION | UNILIN/VALINGE |
| WARRANTY | RESIDENTIAL 20 YEARS , COMMERCIAL 10 YEARS |

TECHNICAL DATA:

| TEST ITEM | TEST STANDARD | TEST RESULTS |
|--------------------------------|---------------|---------------------------------------|
| Slip Resistance | EN13893 | Class DS |
| Formaldehyde | EN717 | E1 |
| Smoke Generation | ENISO9239-1 | Class S1 |
| Critical Heat Flux | ENISO9239-1 | Class B |
| Flame Spread | ENISO11925-2 | Class B |
| Reaction to Fire | EN13501-1 | Bf1- S1 |
| Abrasion Resistance | EN13329 | Class 23/43 |
| Resistance to Stain | EN423 | Resistant |
| Chemical Resistance | EN423 | Resistant |
| Dimensional Stability | EN434 | X direction:-0.04%/Y direction:-0.02% |
| Curling after Exposure to Heat | EN434 | ~0.01mm |
| Wear Resistance | EN660-2 | Group T |
| Residual Indentation | EN433 | ~0.03mm (LVT click) |
| Chair Caster | EN425 | Typ W |
| Color fastness | ISO105-B02 | >=6 |

RECOMENDED FOR:


MULTI-FAMILY· CONDOMINIUMS· STUDENT HOUSING

PVC CLICK

PVC Click Flooring

As evident from its name, Click LVT comes with a click-lock mechanism to slot the LVT planks together without any adhesive. Imitating high-end flooring to an impeccable standard, Click LVT couples the practical benefits of LVT with ease of click installation.

Click LVT is built with multiple layers to provide a robust yet luxury flooring look to your interior. With a multi-layer solid vinyl backing, Click LVT is an easy to install, easy to maintain, and easy to repair flooring material that can be used to give residential and commercial interiors a sophisticated look.

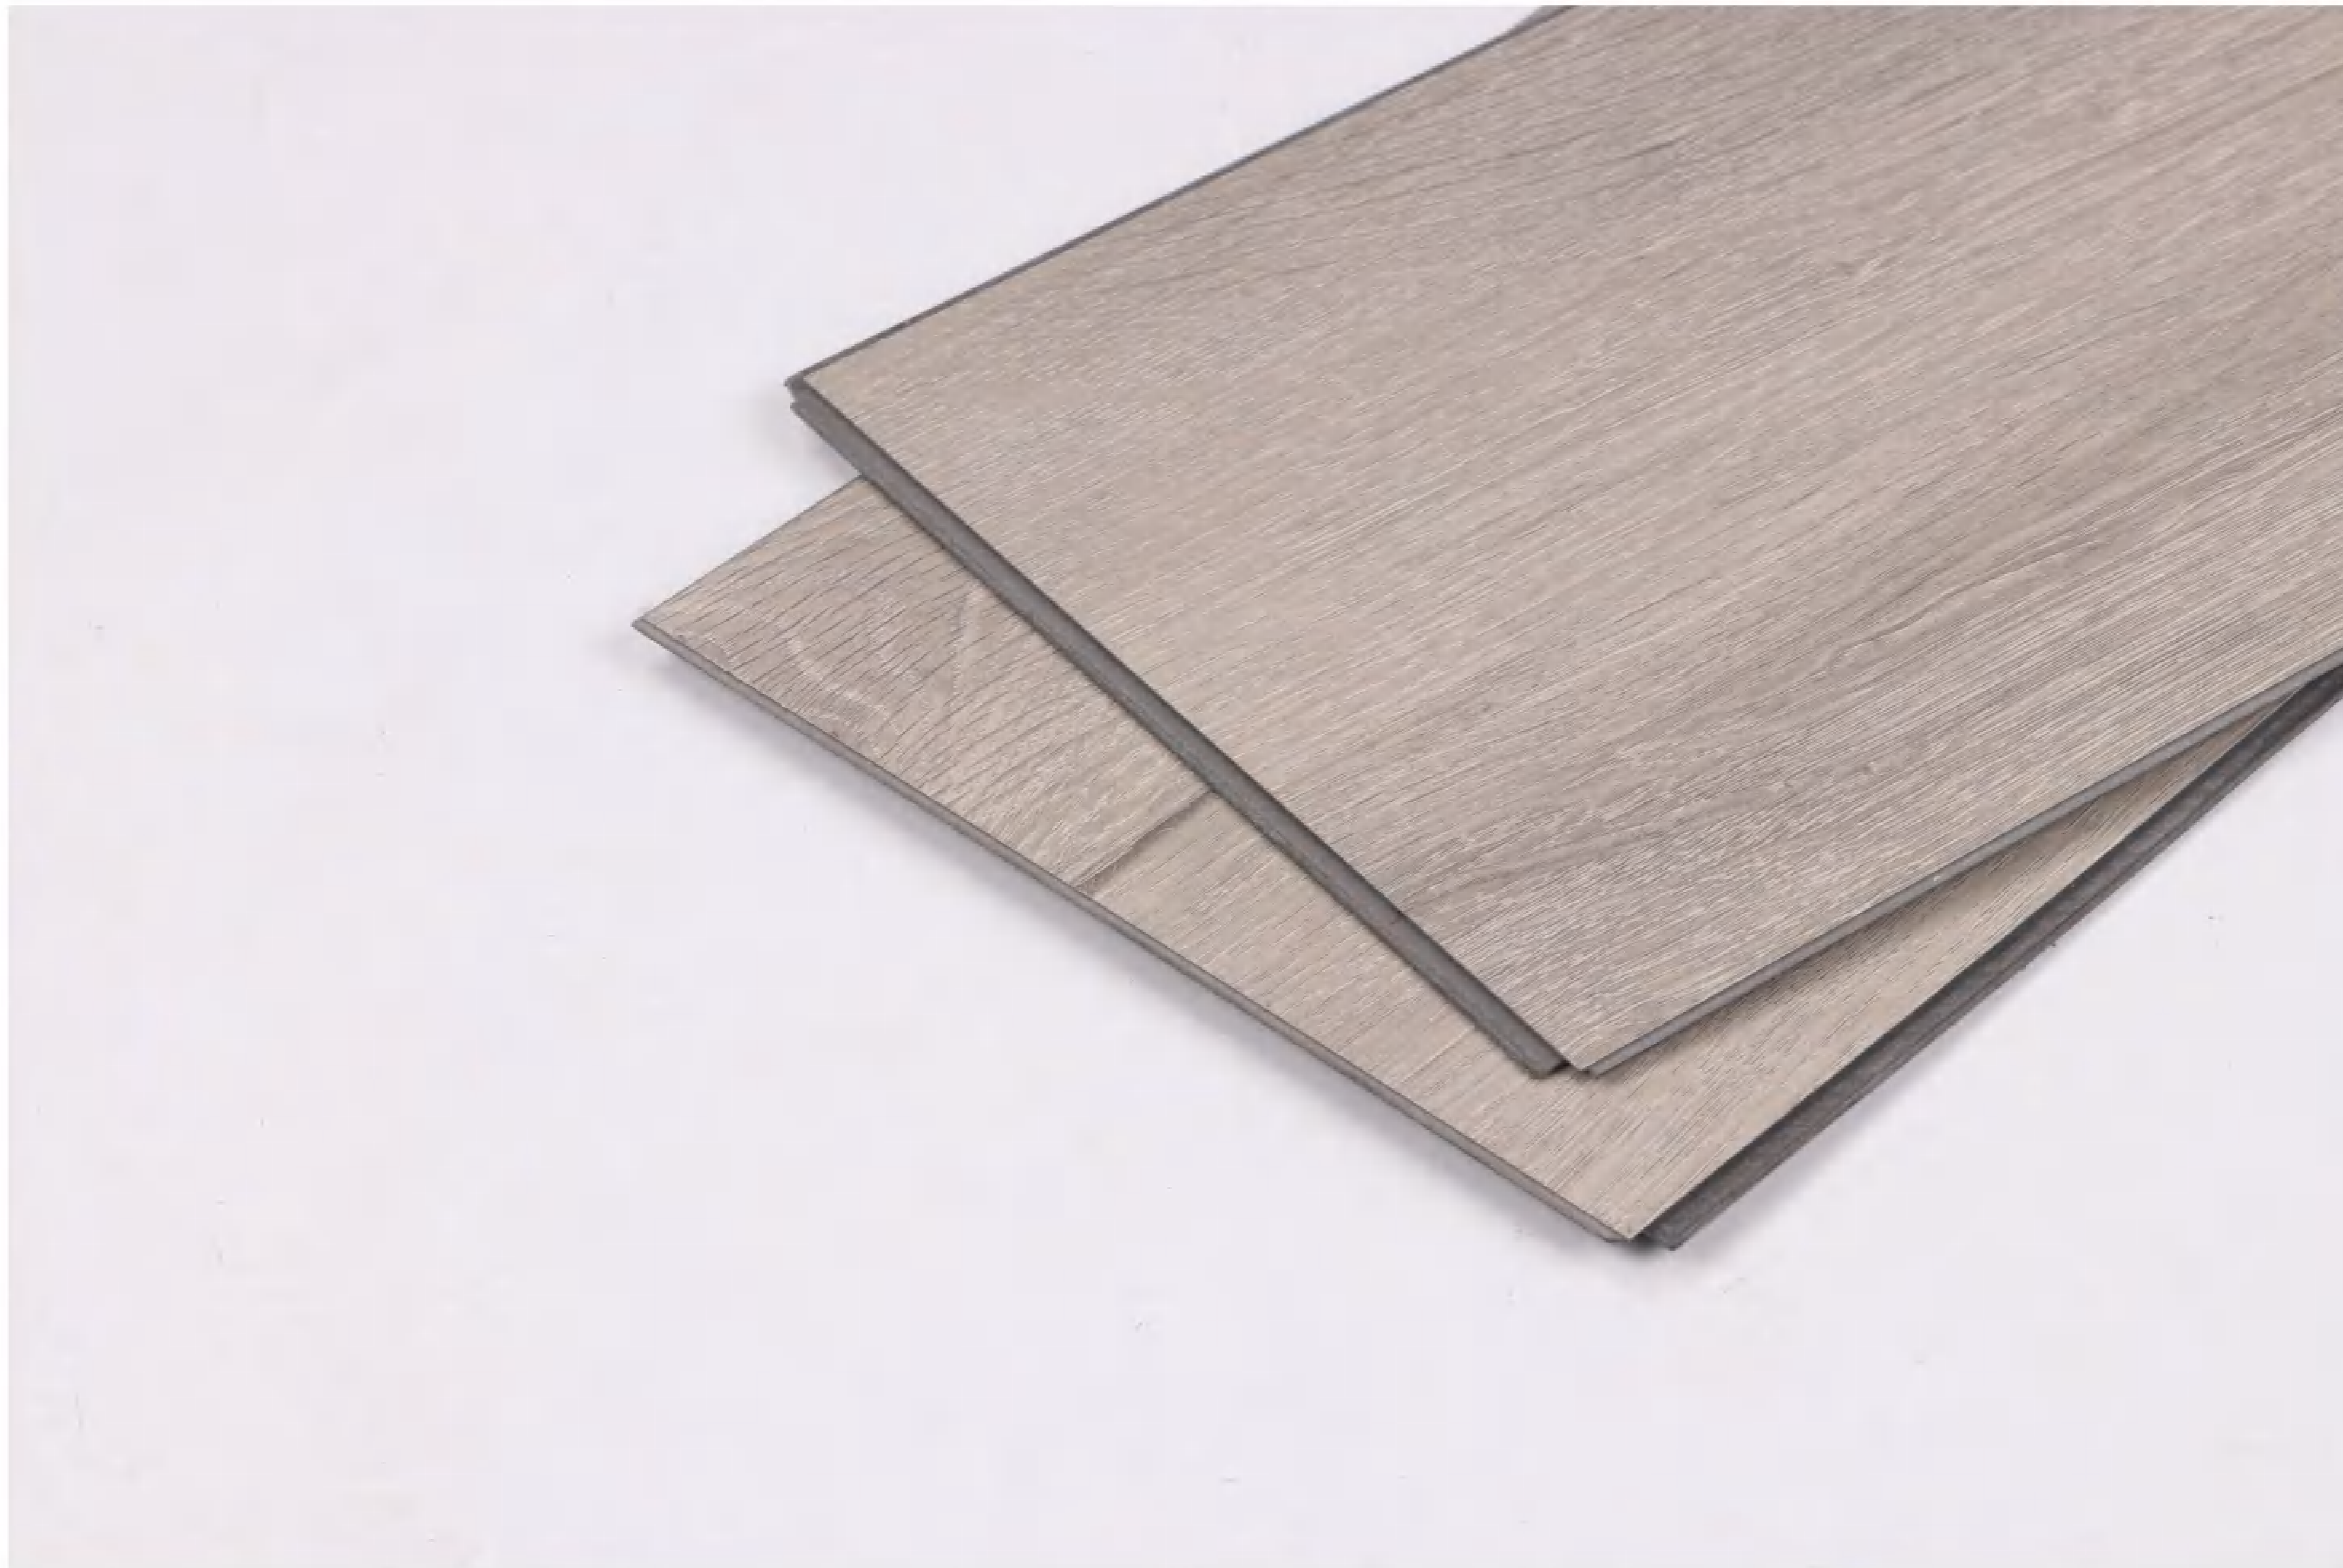

FEATURES&BENEFITS:


WATERPROOF
CORE




SOUND
REDUCING PAD



FAST&SECURE
CLIP SYSTEM

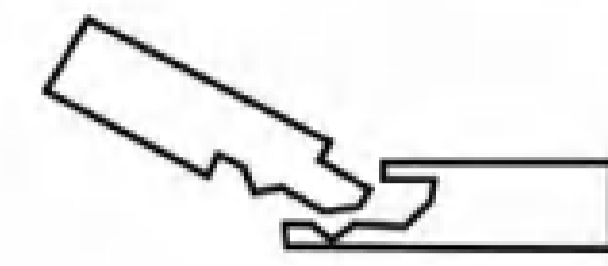


BEVELED
EDGE

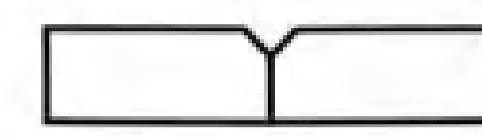

EZ-CLEAN
COATING



LIFETIME
WARRANTY

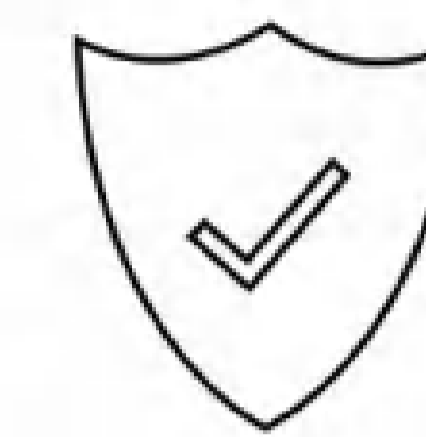

FLOORSCORE
CERTIFIED



LEED POINT
ELIGIBLE




SPECIFICATIONS:

| | |
|-------------------|----------------------------------------------|
| ITEM | LOOSE LAY VINYL PLANKS |
| SIZE | 7"X48" / 9"X48" |
| THICKNESS | 5.0MM |
| WEARLAYER | 0.3MM / 0.5MM / 0.7MM |
| SURFACE TREATMENT | UV / PU COATING WITH MATT / SEMI-MATT FINISH |
| SURFACE TEXTURE | WOOD EMBOSSED |
| INSTALLATION | LAY DOWN |
| WARRANTY | RESIDENTIAL 20 YEARS , COMMERCIAL 10 YEARS |

TECHNICAL DATA:

| TEST ITEM | TEST STANDARD | TEST RESULTS |
|--------------------------------|---------------|---------------------------------------|
| Slip Resistance | EN13893 | Class DS |
| Formaldehyde | EN717 | E1 |
| Smoke Generation | ENISO9239-1 | Class S1 |
| Critical Heat Flux | ENISO9239-1 | Class B |
| Flame Spread | ENISO11925-2 | Class B |
| Reaction to Fire | EN13501-1 | Bf1- S1 |
| Abrasion Resistance | EN13329 | Class 23/43 |
| Resistance to Stain | EN423 | Resistant |
| Chemical Resistance | EN423 | Resistant |
| Dimensional Stability | EN434 | X direction:-0.04%/Y direction:-0.02% |
| Curling after Exposure to Heat | EN434 | ~0.01mm |
| Wear Resistance | EN660-2 | Group T |
| Residual Indentation | EN433 | ~0.03mm (LVT click) |
| Chair Caster | EN425 | Typ W |
| Color fastness | ISO105-B02 | >=6 |

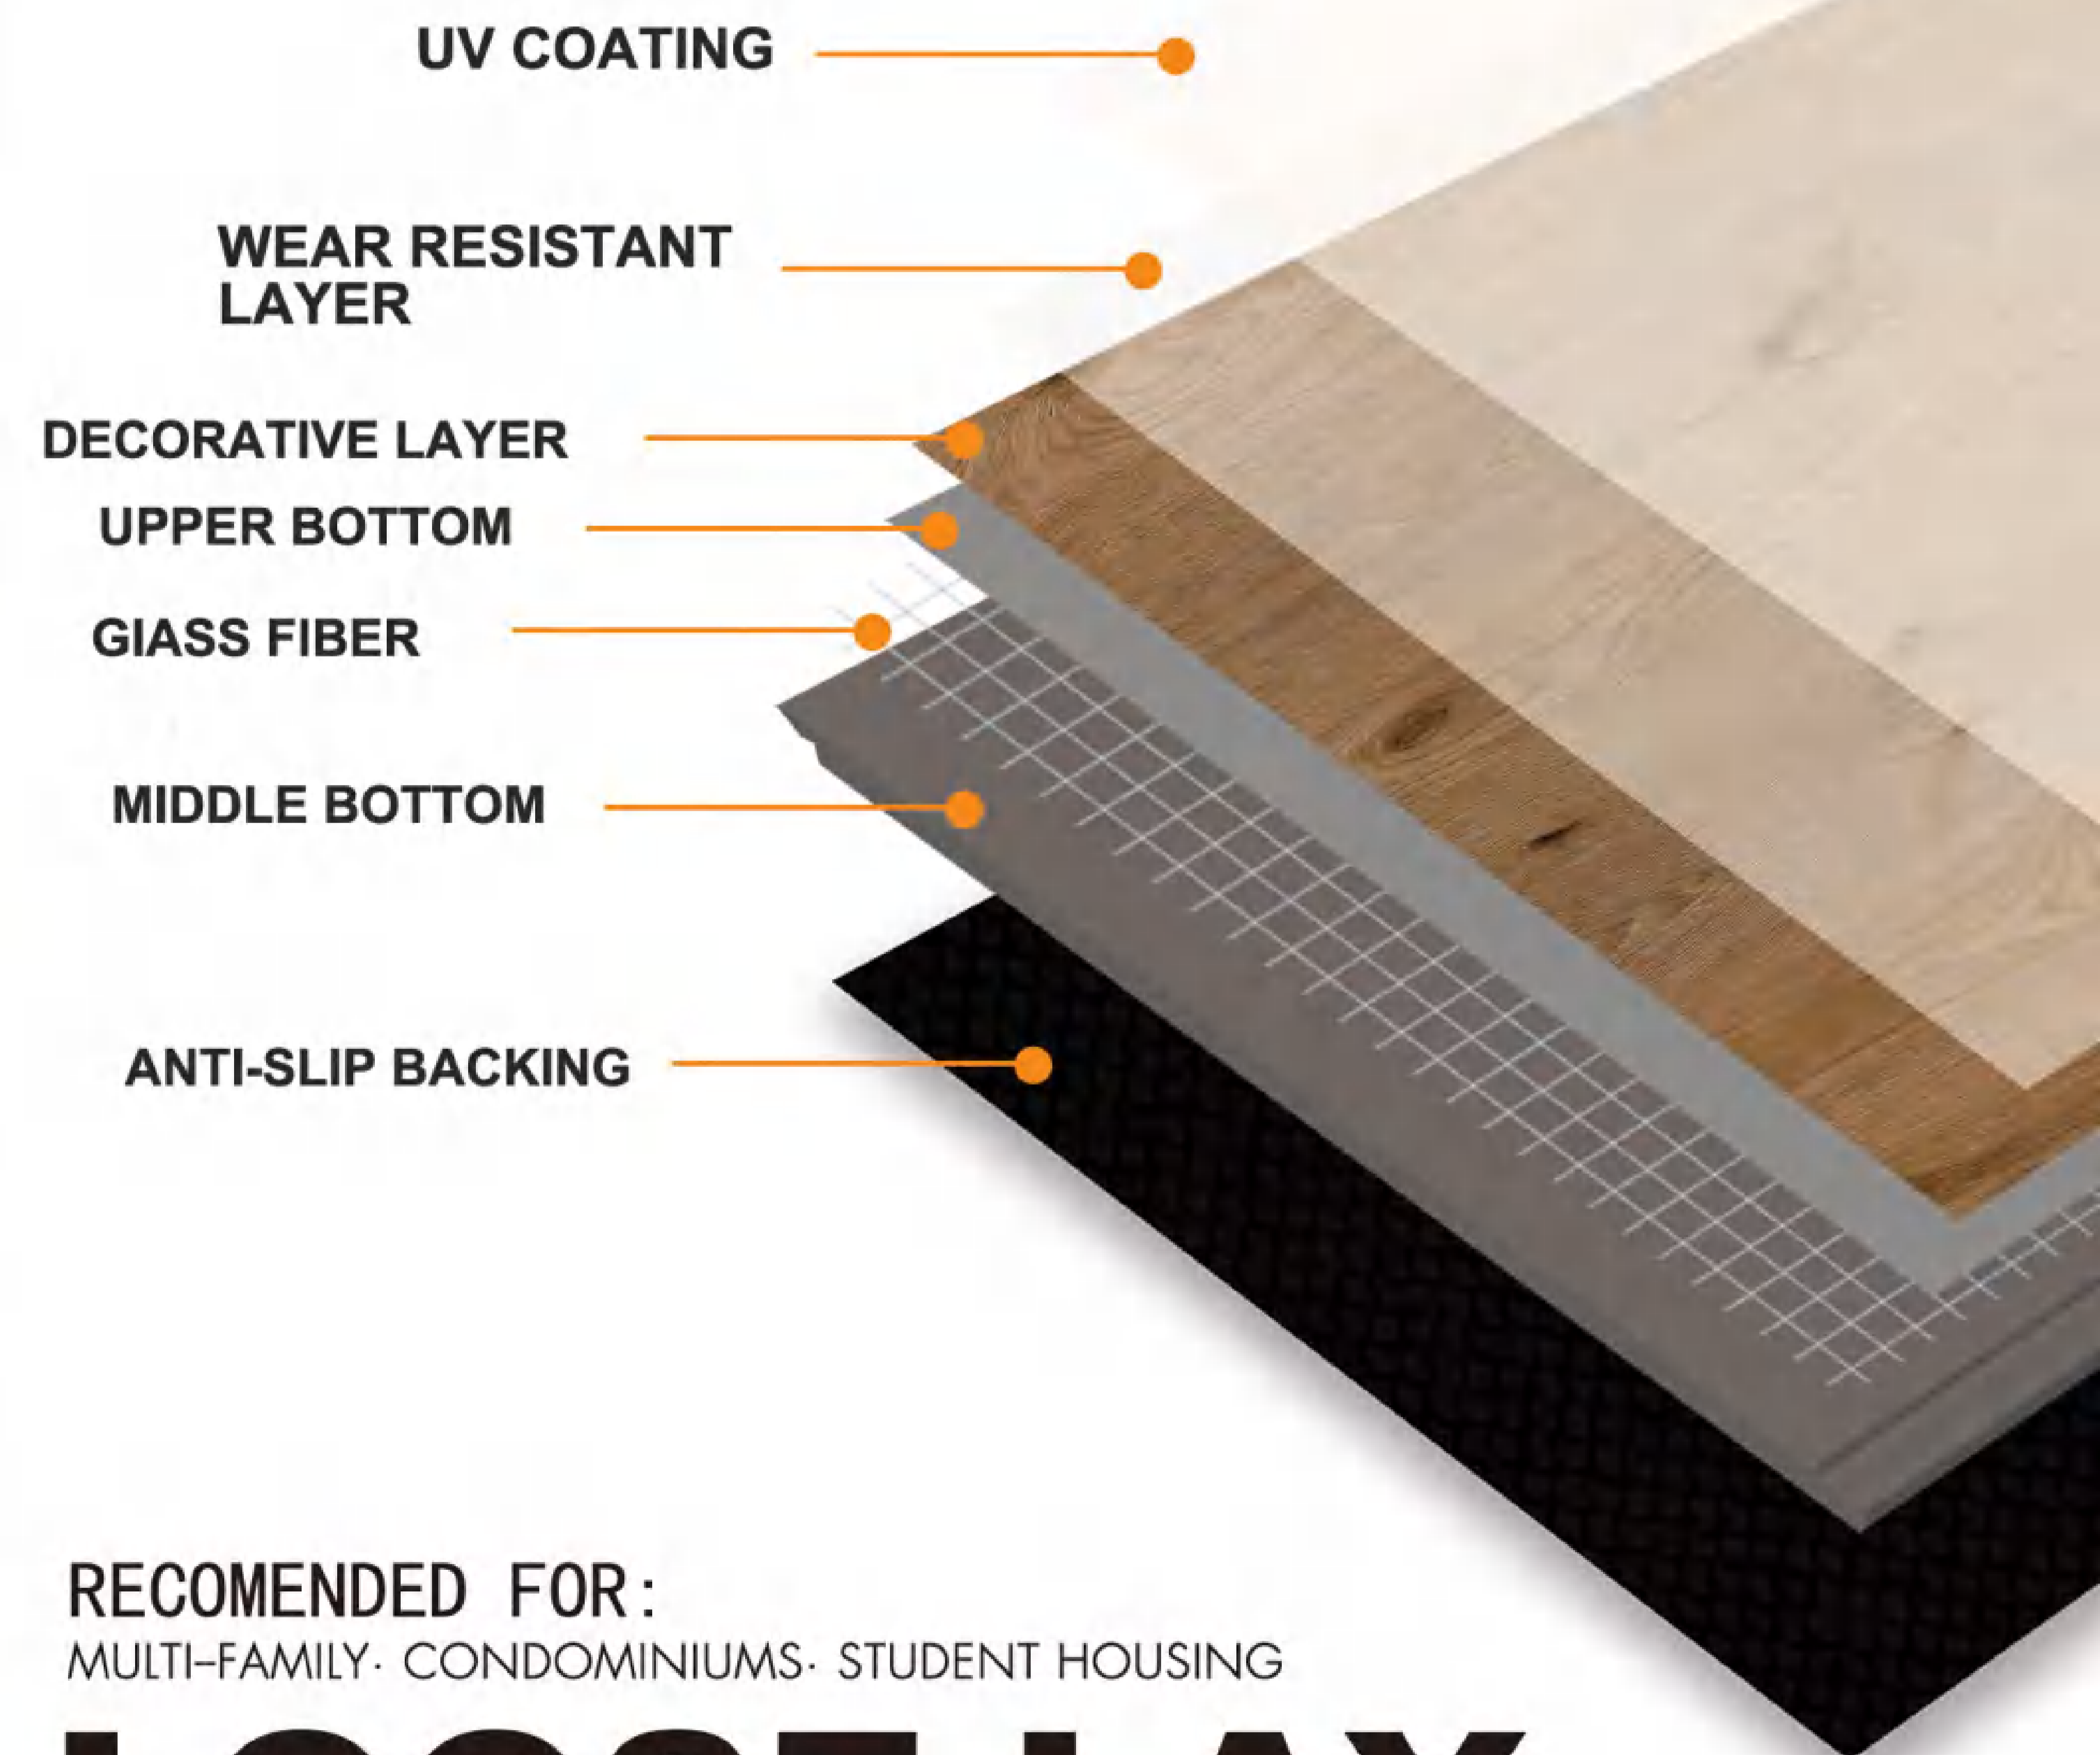

RECOMENDED FOR:
MULTI-FAMILY · CONDOMINIUMS · STUDENT HOUSING


LOOSE LAY

Loose Lay Flooring


Loose Lay Luxury Vinyl has been the most popular flooring option for commercial as well as residential interiors. This popularity stems from the Loose Lay's coupling of luxury vinyl with phthalate-free plasticizers, thereby adding weight and durability to the LVT flooring.

Loose Lay is an easy to install LVT that requires adhesive for the perimeter tiles only. The LVT pieces within this glued perimeter are simply 'laid' down without any adhesive. The traction needed to hold the tiles at its place without any adhesive is provided by the added weight and the specialized backing.

Availability of Loose Lay LVT in a variety of designs imitating natural patterns and vibrant colours can help you complete a splendid interior look in a cost effective way!

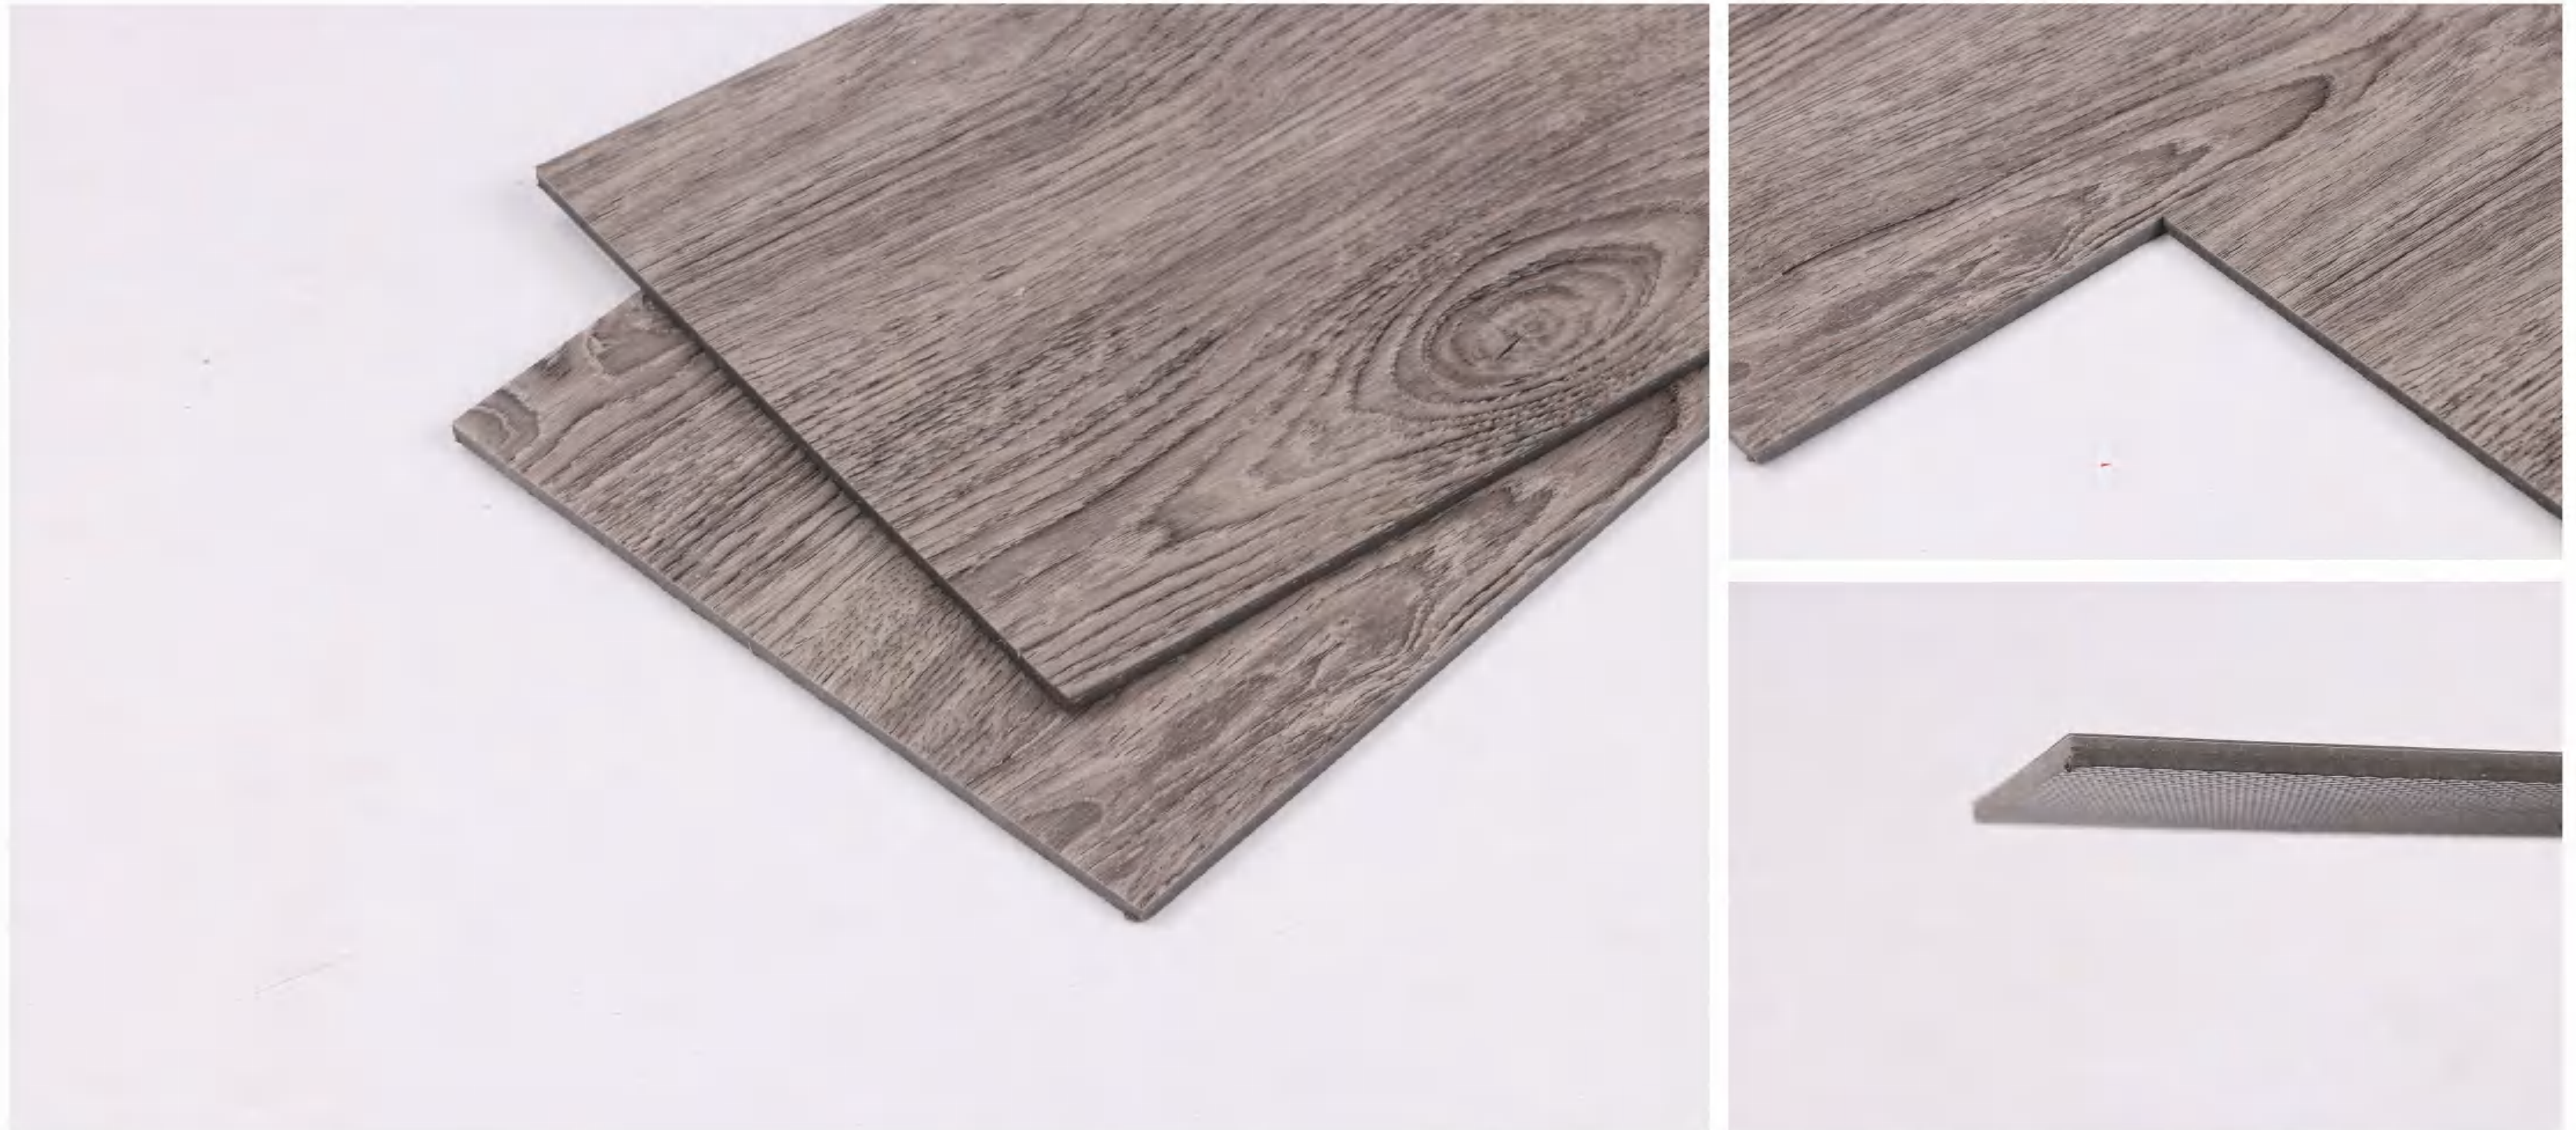

Special Backing

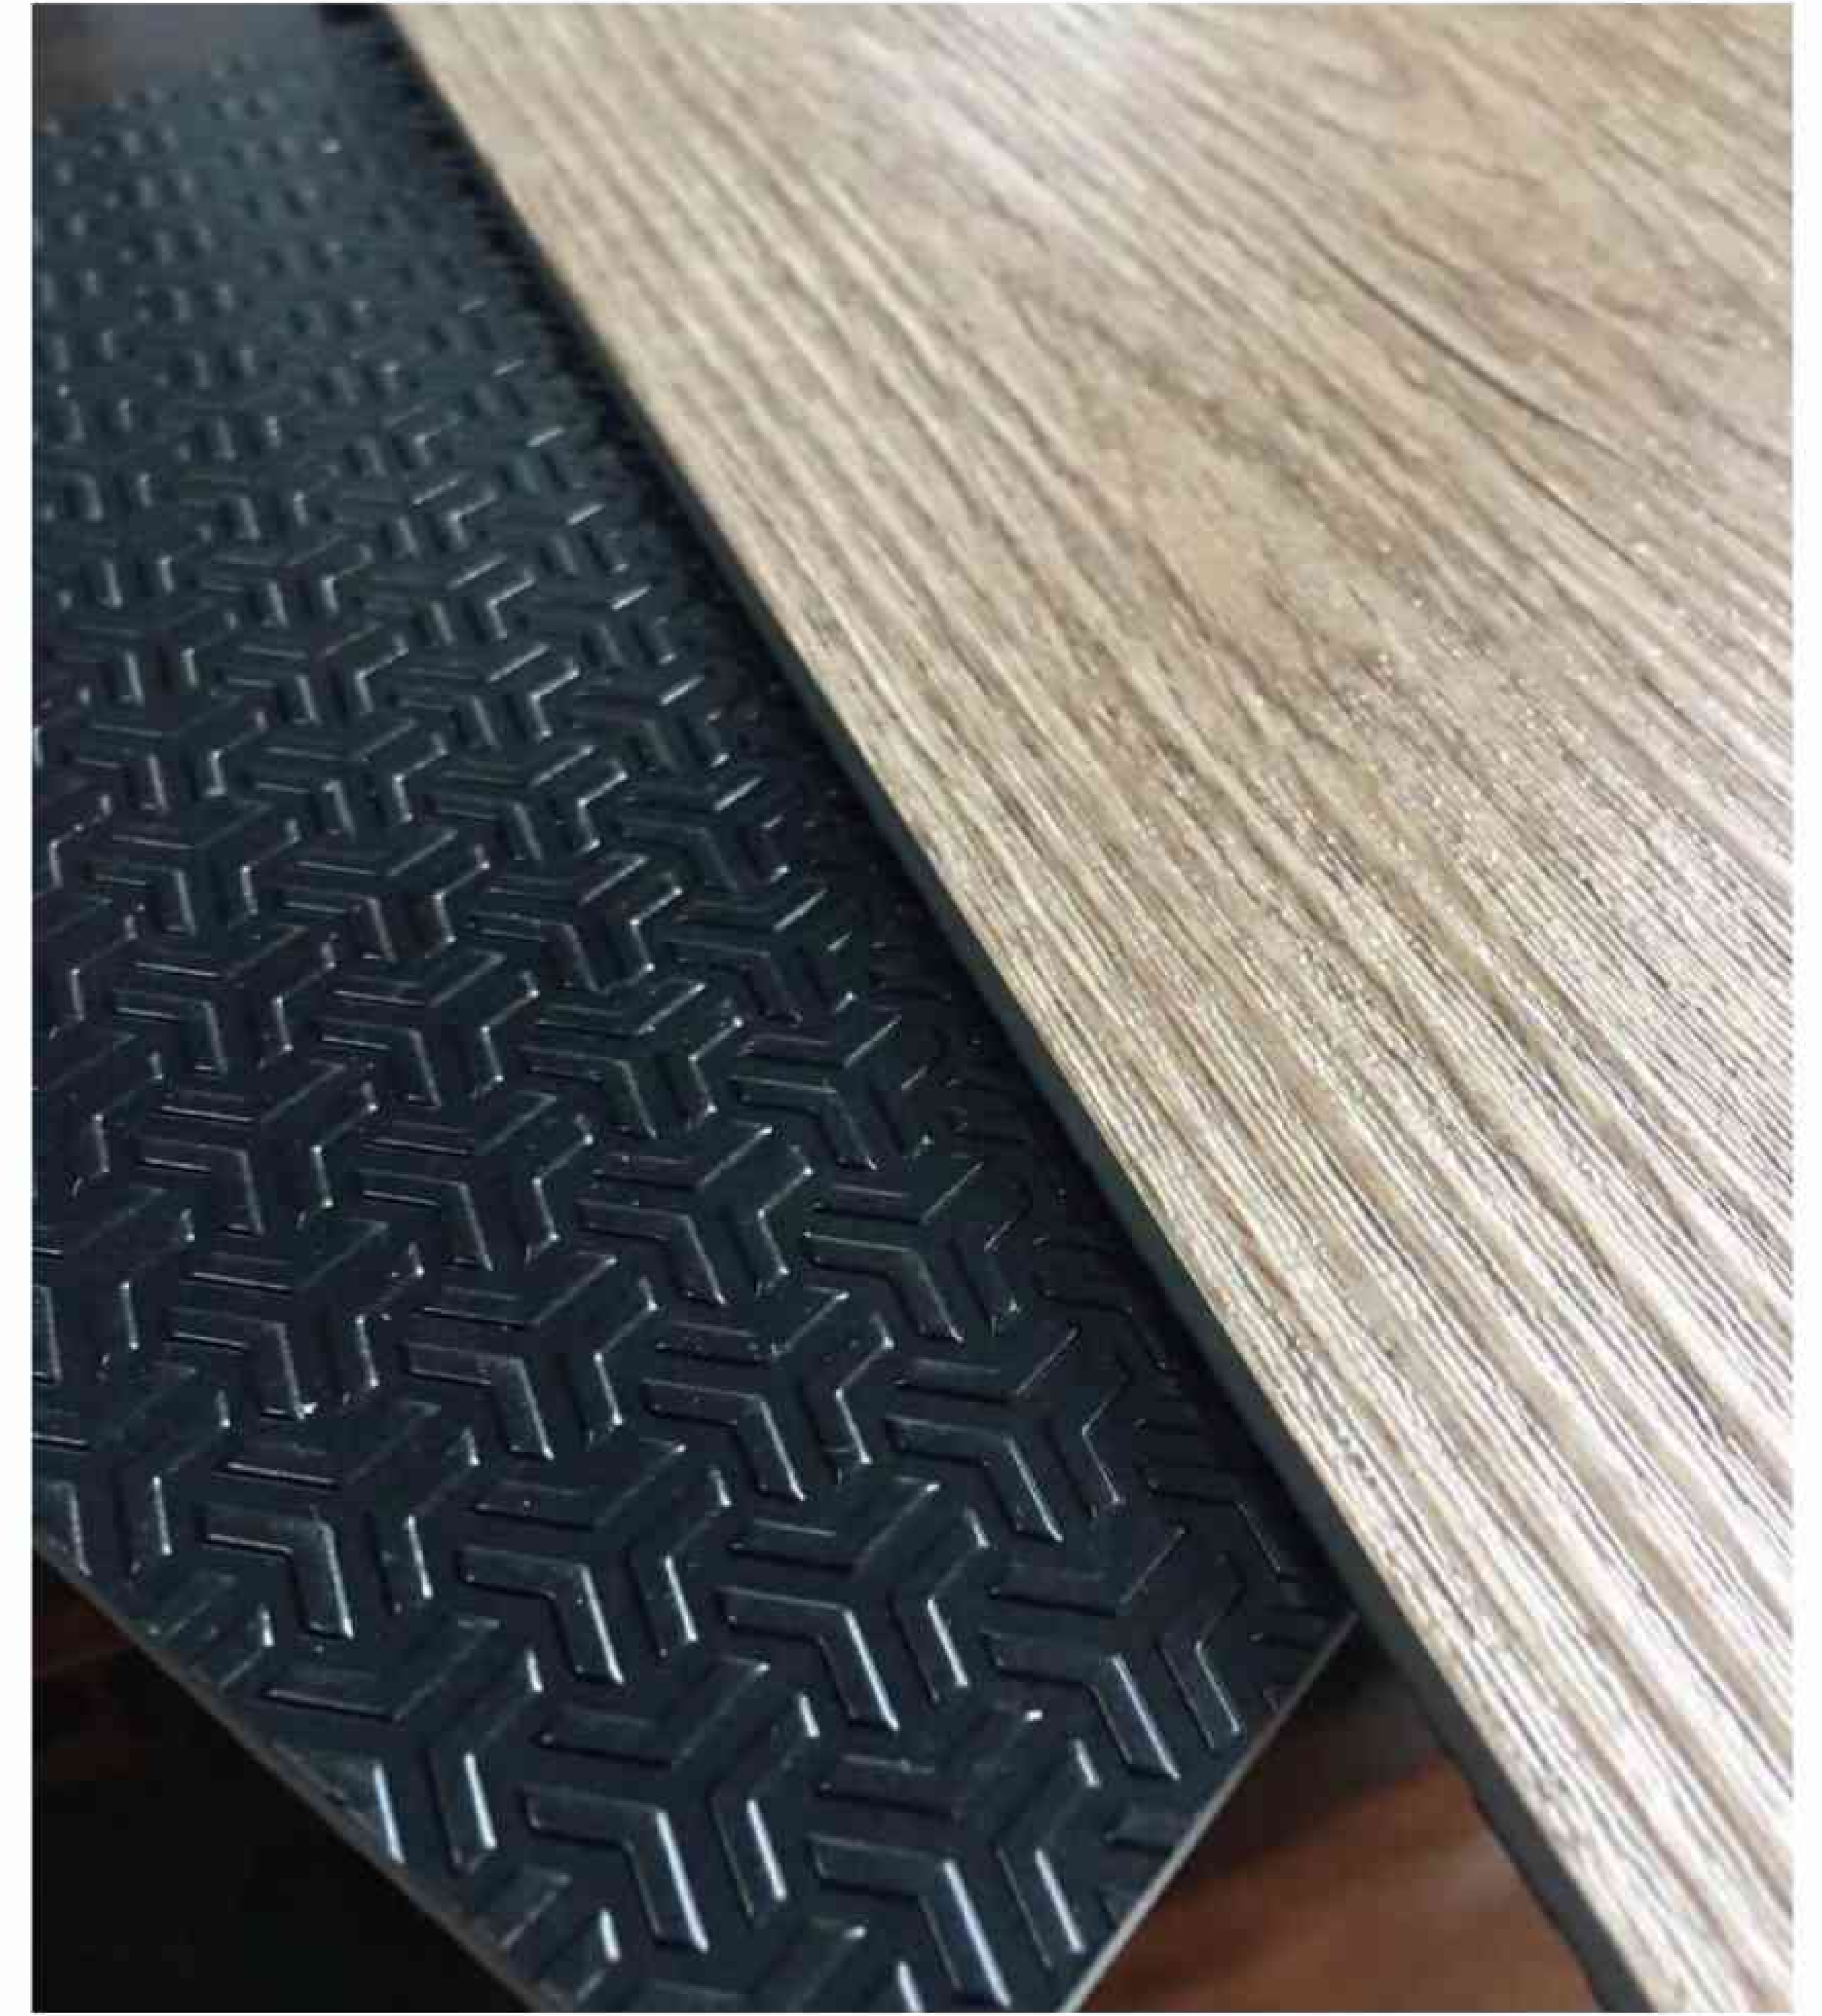

FEATURES&BENEFITS:

WATERPROOF CORE




SOUND REDUCING PAD



FAST&SECURE CLIP SYSTEM




BEVELED EDGE

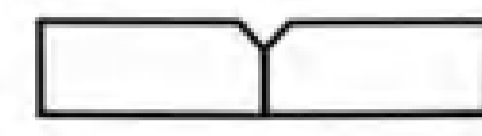

EZ-CLEAN COATING




LIFETIME WARRANTY

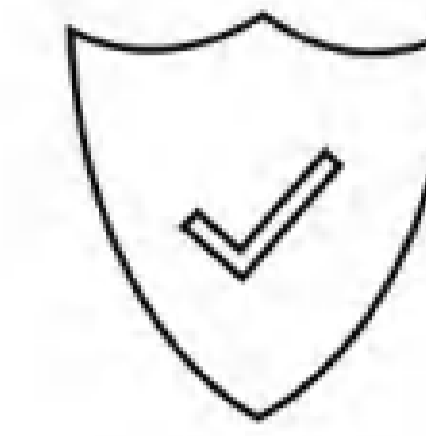

FLOORSCORE CERTIFIED



LEED POINT ELIGIBLE

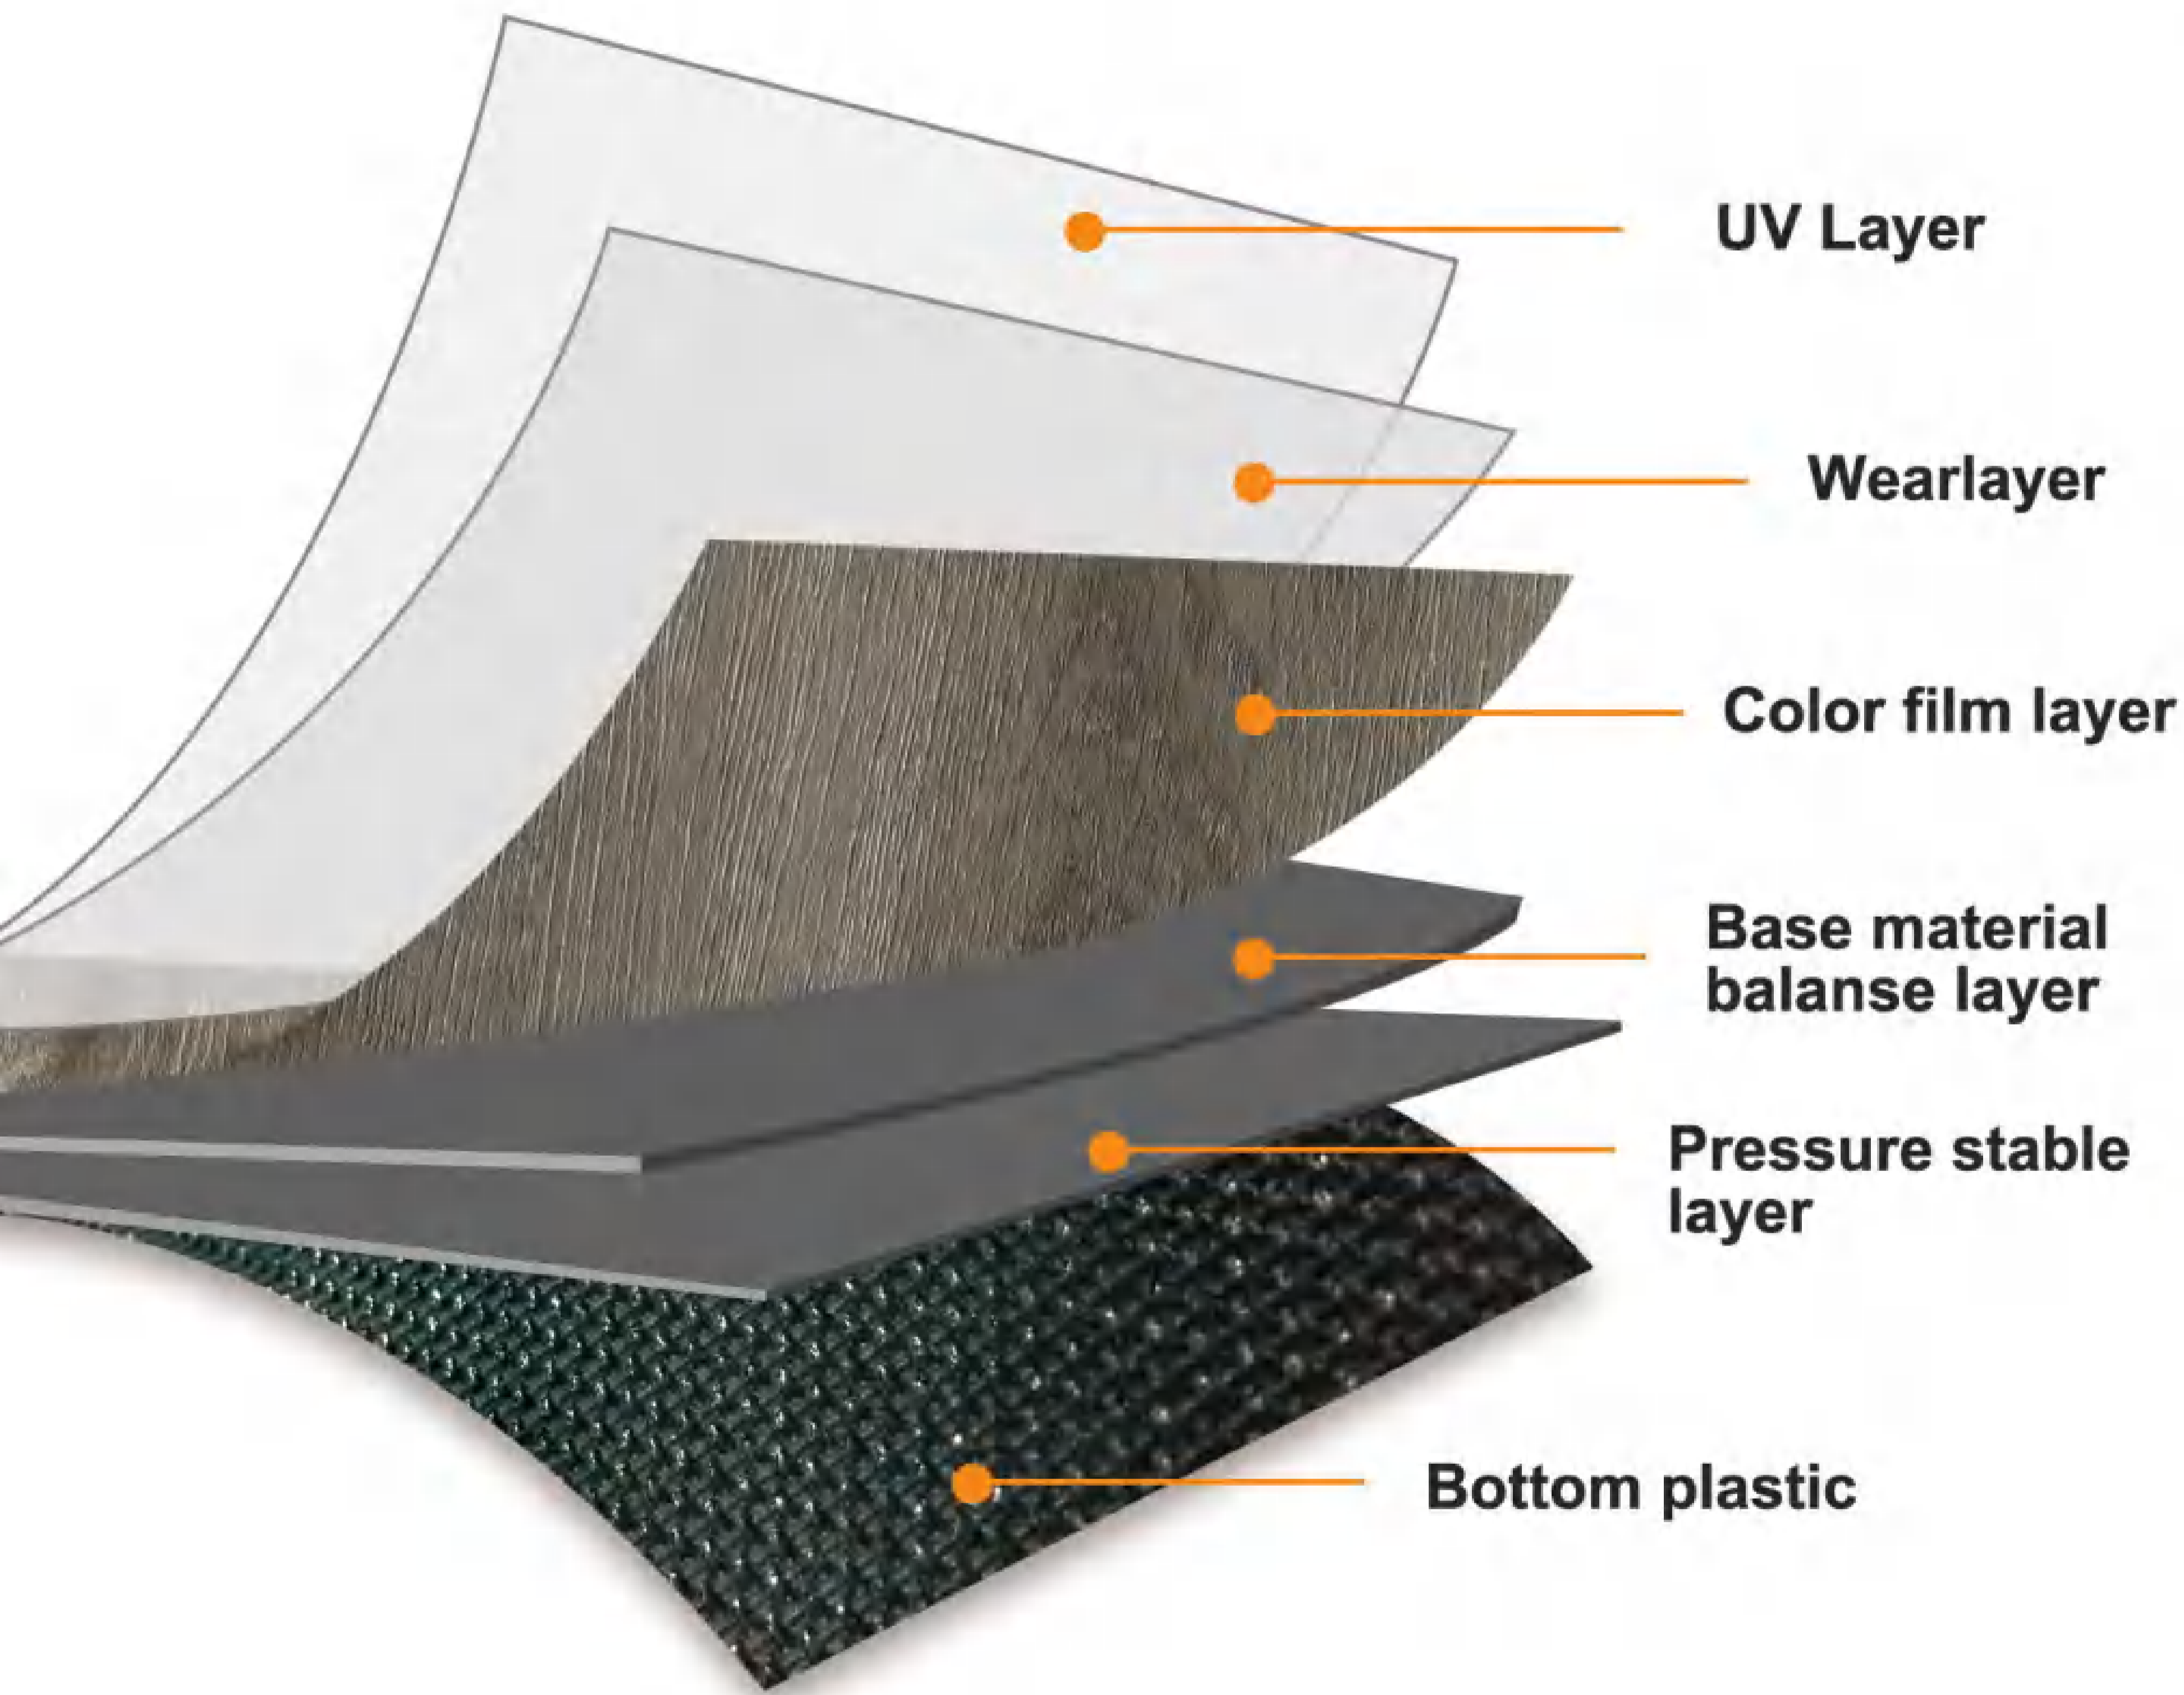

SPECIFICATIONS:

| | |
|-------------------|-------------------------------------------------------------|
| ITEM | GLUE DOWN VINYL FLOOR |
| SIZE | 6"X36" / 6"X48 / 7"X48" |
| THICKNESS | 2.0MM / 2.5MM / 3.0MM |
| WEARLAYER | 0.1MM / 0.2MM / 0.3MM / 0.5MM / 0.7MM |
| SURFACE TREATMENT | UV / PU COATING WITH MATT / SEMI-MATT FINISH |
| SURFACE TEXTURE | WOOD EMBOSSED / HAND SCRAPED / EIR / SAW CUT / CERAMIC BEAD |
| INSTALLATION | GLUE DOWN |
| WARRANTY | RESIDENTIAL 20 YEARS , COMMERCIAL 10 YEARS |

TECHNICAL DATA:

| TEST ITEM | TEST STANDARD | TEST RESULTS |
|--------------------------------|---------------|---------------------------------------|
| Slip Resistance | EN13893 | Class DS |
| Formaldehyde | EN717 | E1 |
| Smoke Generation | ENISO9239-1 | Class S1 |
| Critical Heat Flux | ENISO9239-1 | Class B |
| Flame Spread | ENISO11925-2 | Class B |
| Reaction to Fire | EN13501-1 | Bf1- S1 |
| Abrasion Resistance | EN13329 | Class 23/43 |
| Resistance to Stain | | |
| Chemical Resistance | EN423 | Resistant |
| Dimensional Stability | EN434 | X direction:-0.04%/Y direction:-0.02% |
| Curling after Exposure to Heat | EN434 | ~0.01mm |
| Wear Resistance | EN660-2 | Group T |
| Residual Indentation | EN433 | ~0.03mm (LVT click) |
| Chair Caster | EN425 | Typ W |
| Color fastness | ISO105-B02 | >=6 |

RECOMENDED FOR:

MULTI-FAMILY· CONDOMINIUMS· STUDENT HOUSING

DRY BACK

Glue Down Flooring

Anyway Flooring Dry Back LVT is an easy to cut, easy to fit, and easy to clean flooring designed for permanent installations on a new or existing subfloor.

With a slip resistant coating ranking of R10, Dry Back LVT is an ideal solution for vinyl installation on top of an existing floor.


This LVT is directly glued to the subfloor with an underlay solution or adhesive, giving exceptional dimensional stability to the floor.



Herringbone Floor



EIR Registered Surface

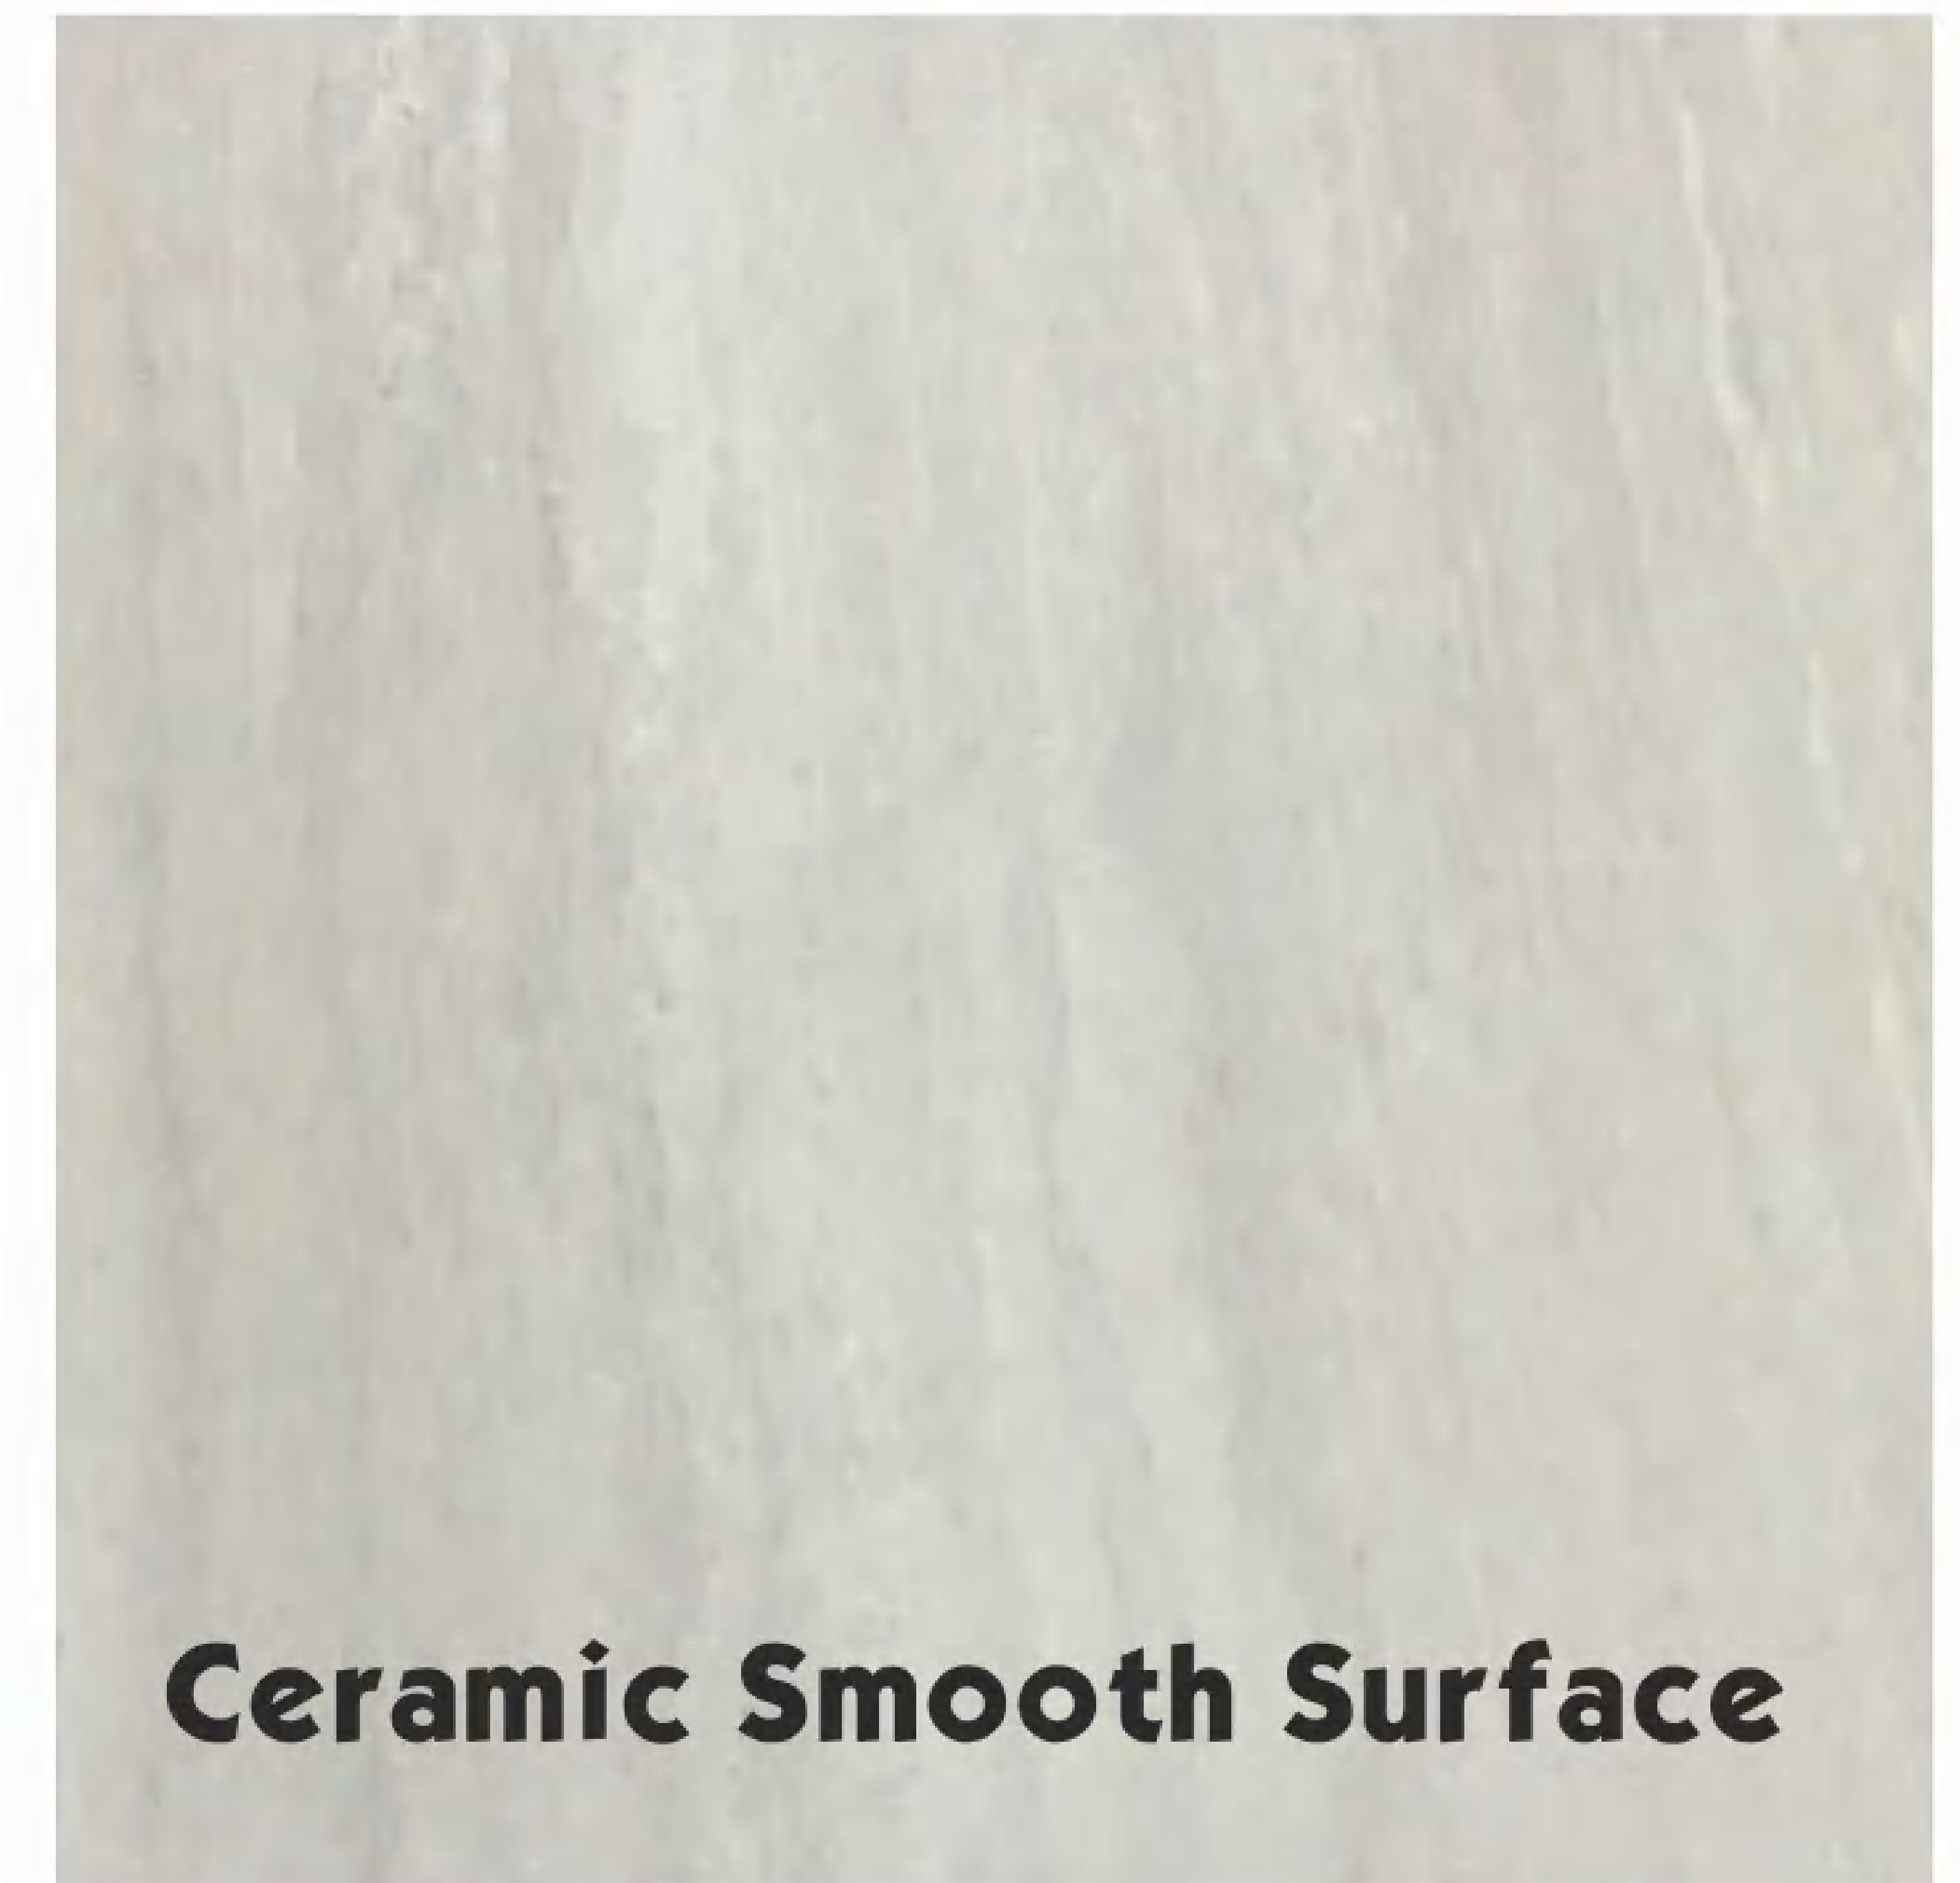

Ceramic Smooth Surface

Colors & Patterns



AWH0021



AWH0022



AWH0023



AWH0024


Colors & Patterns: Stone Texture




101-2



101-4

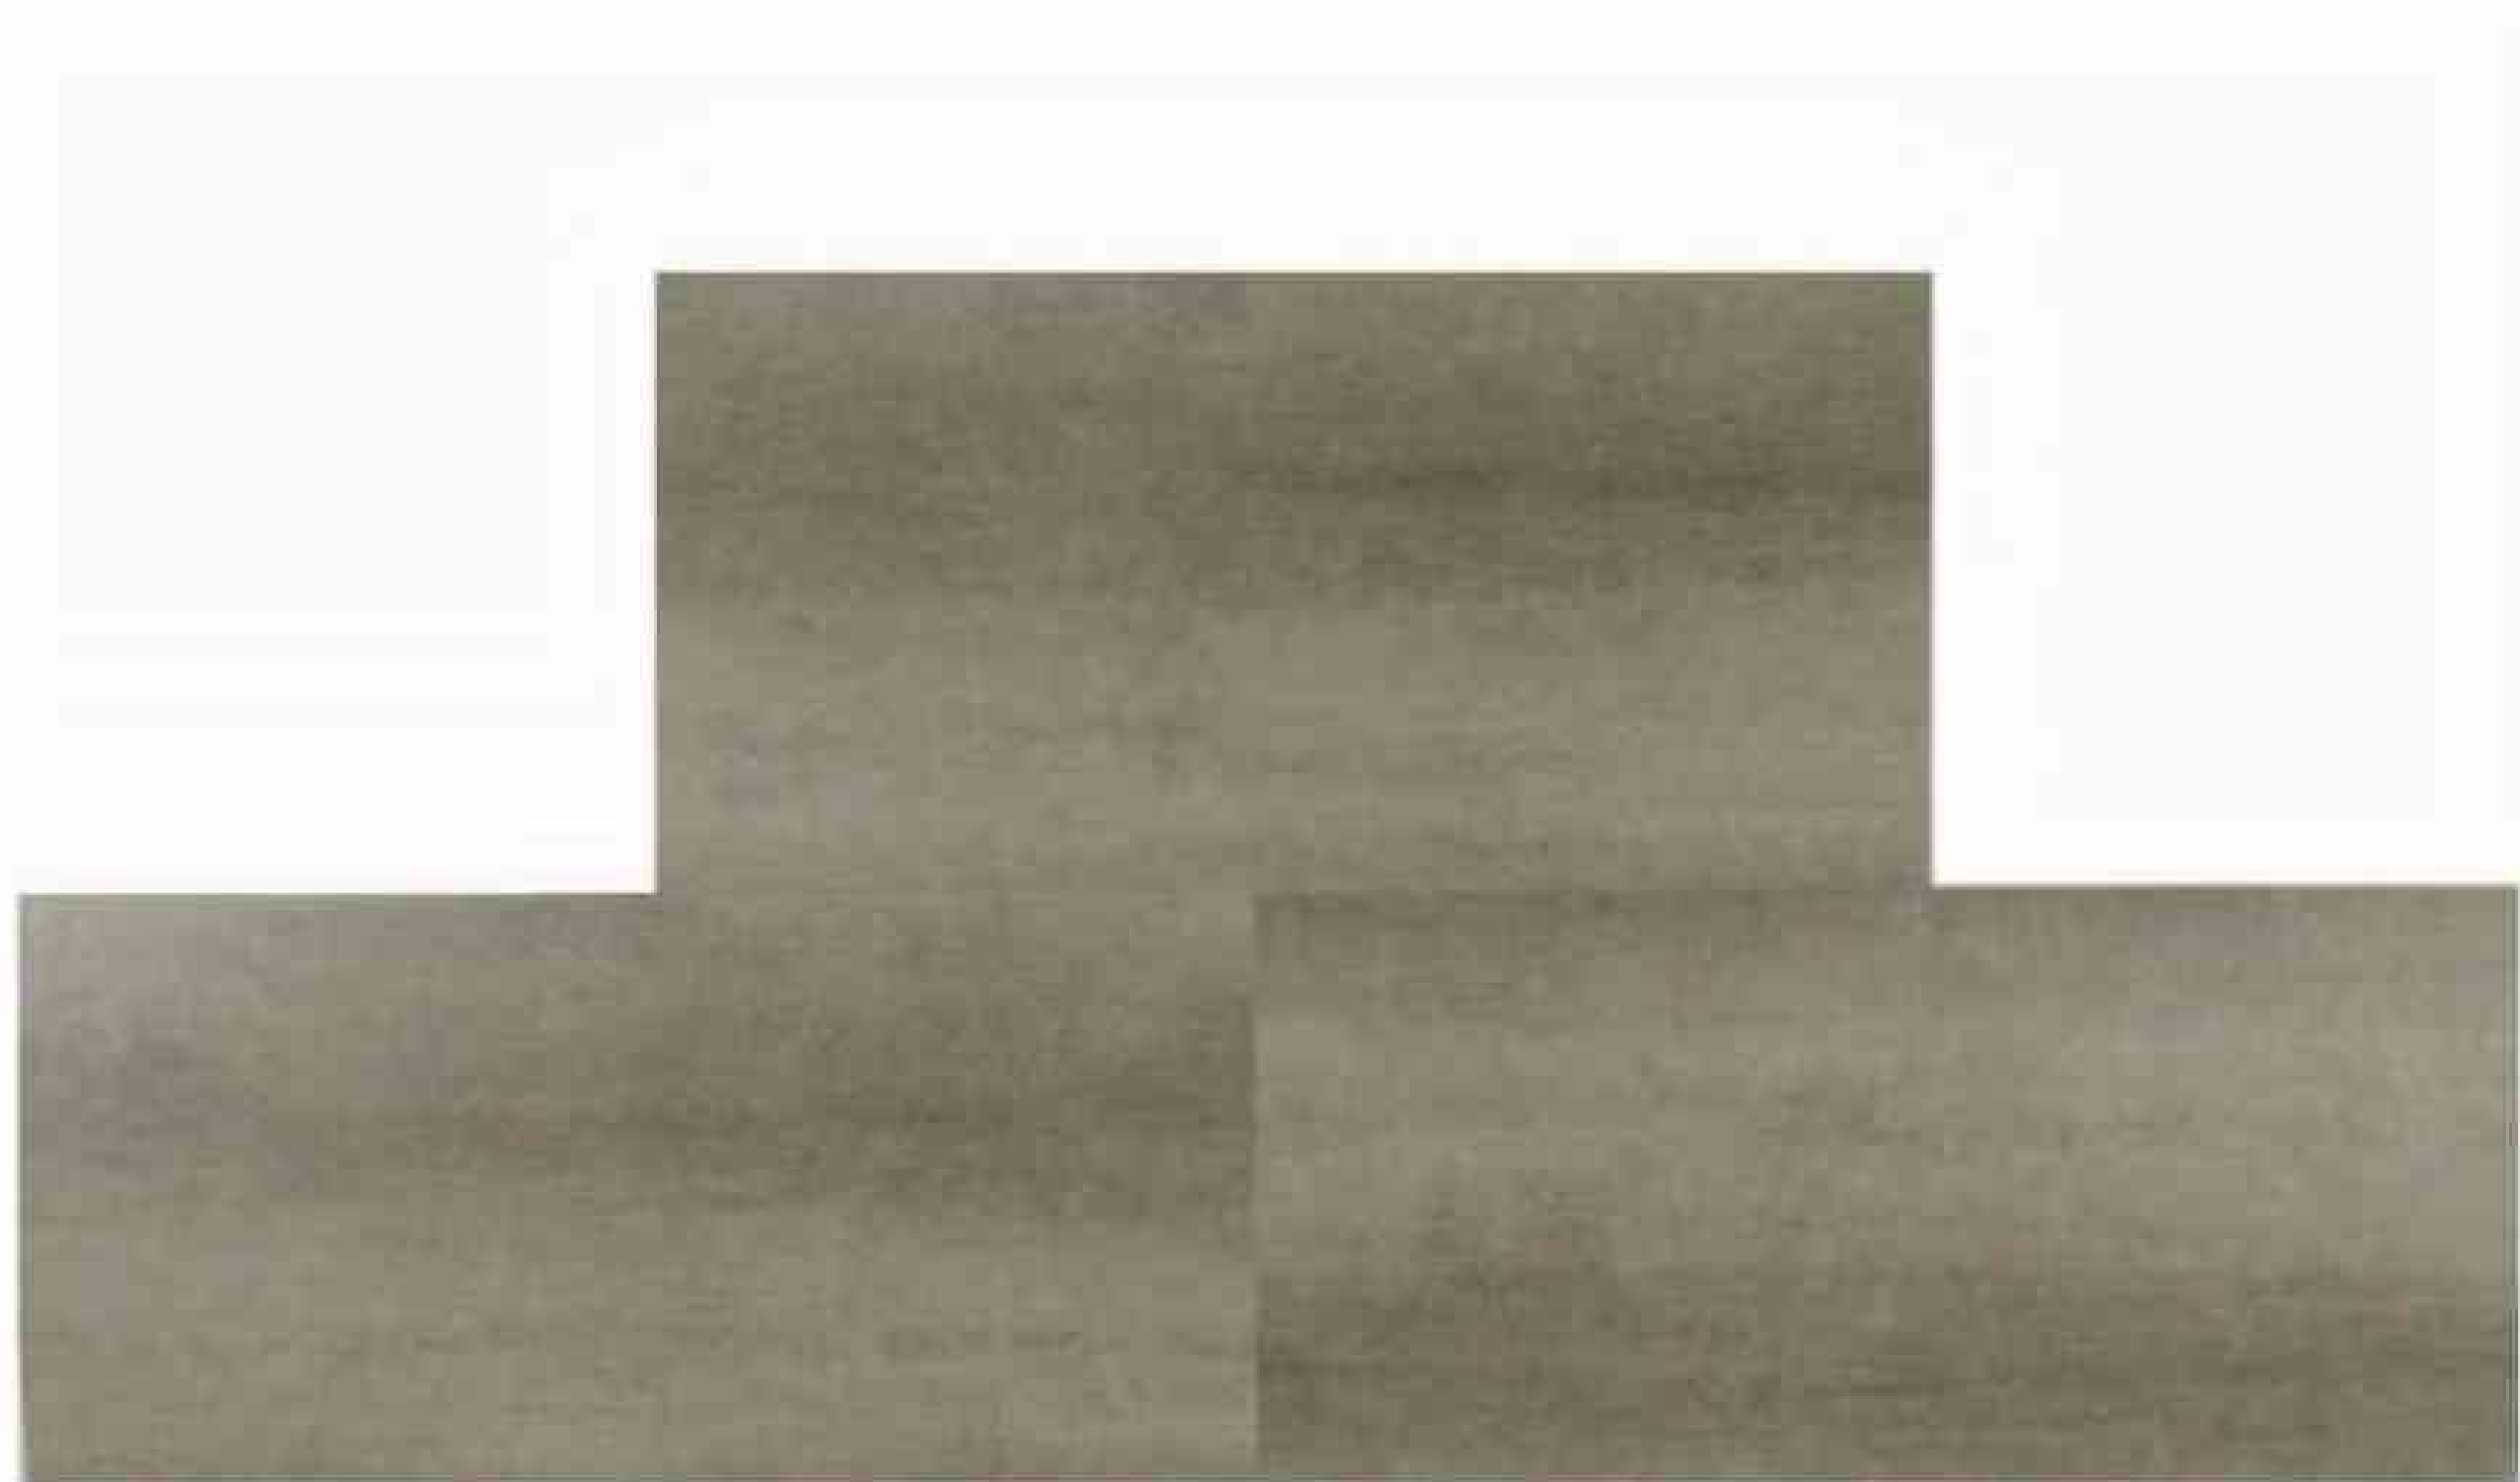

102-1

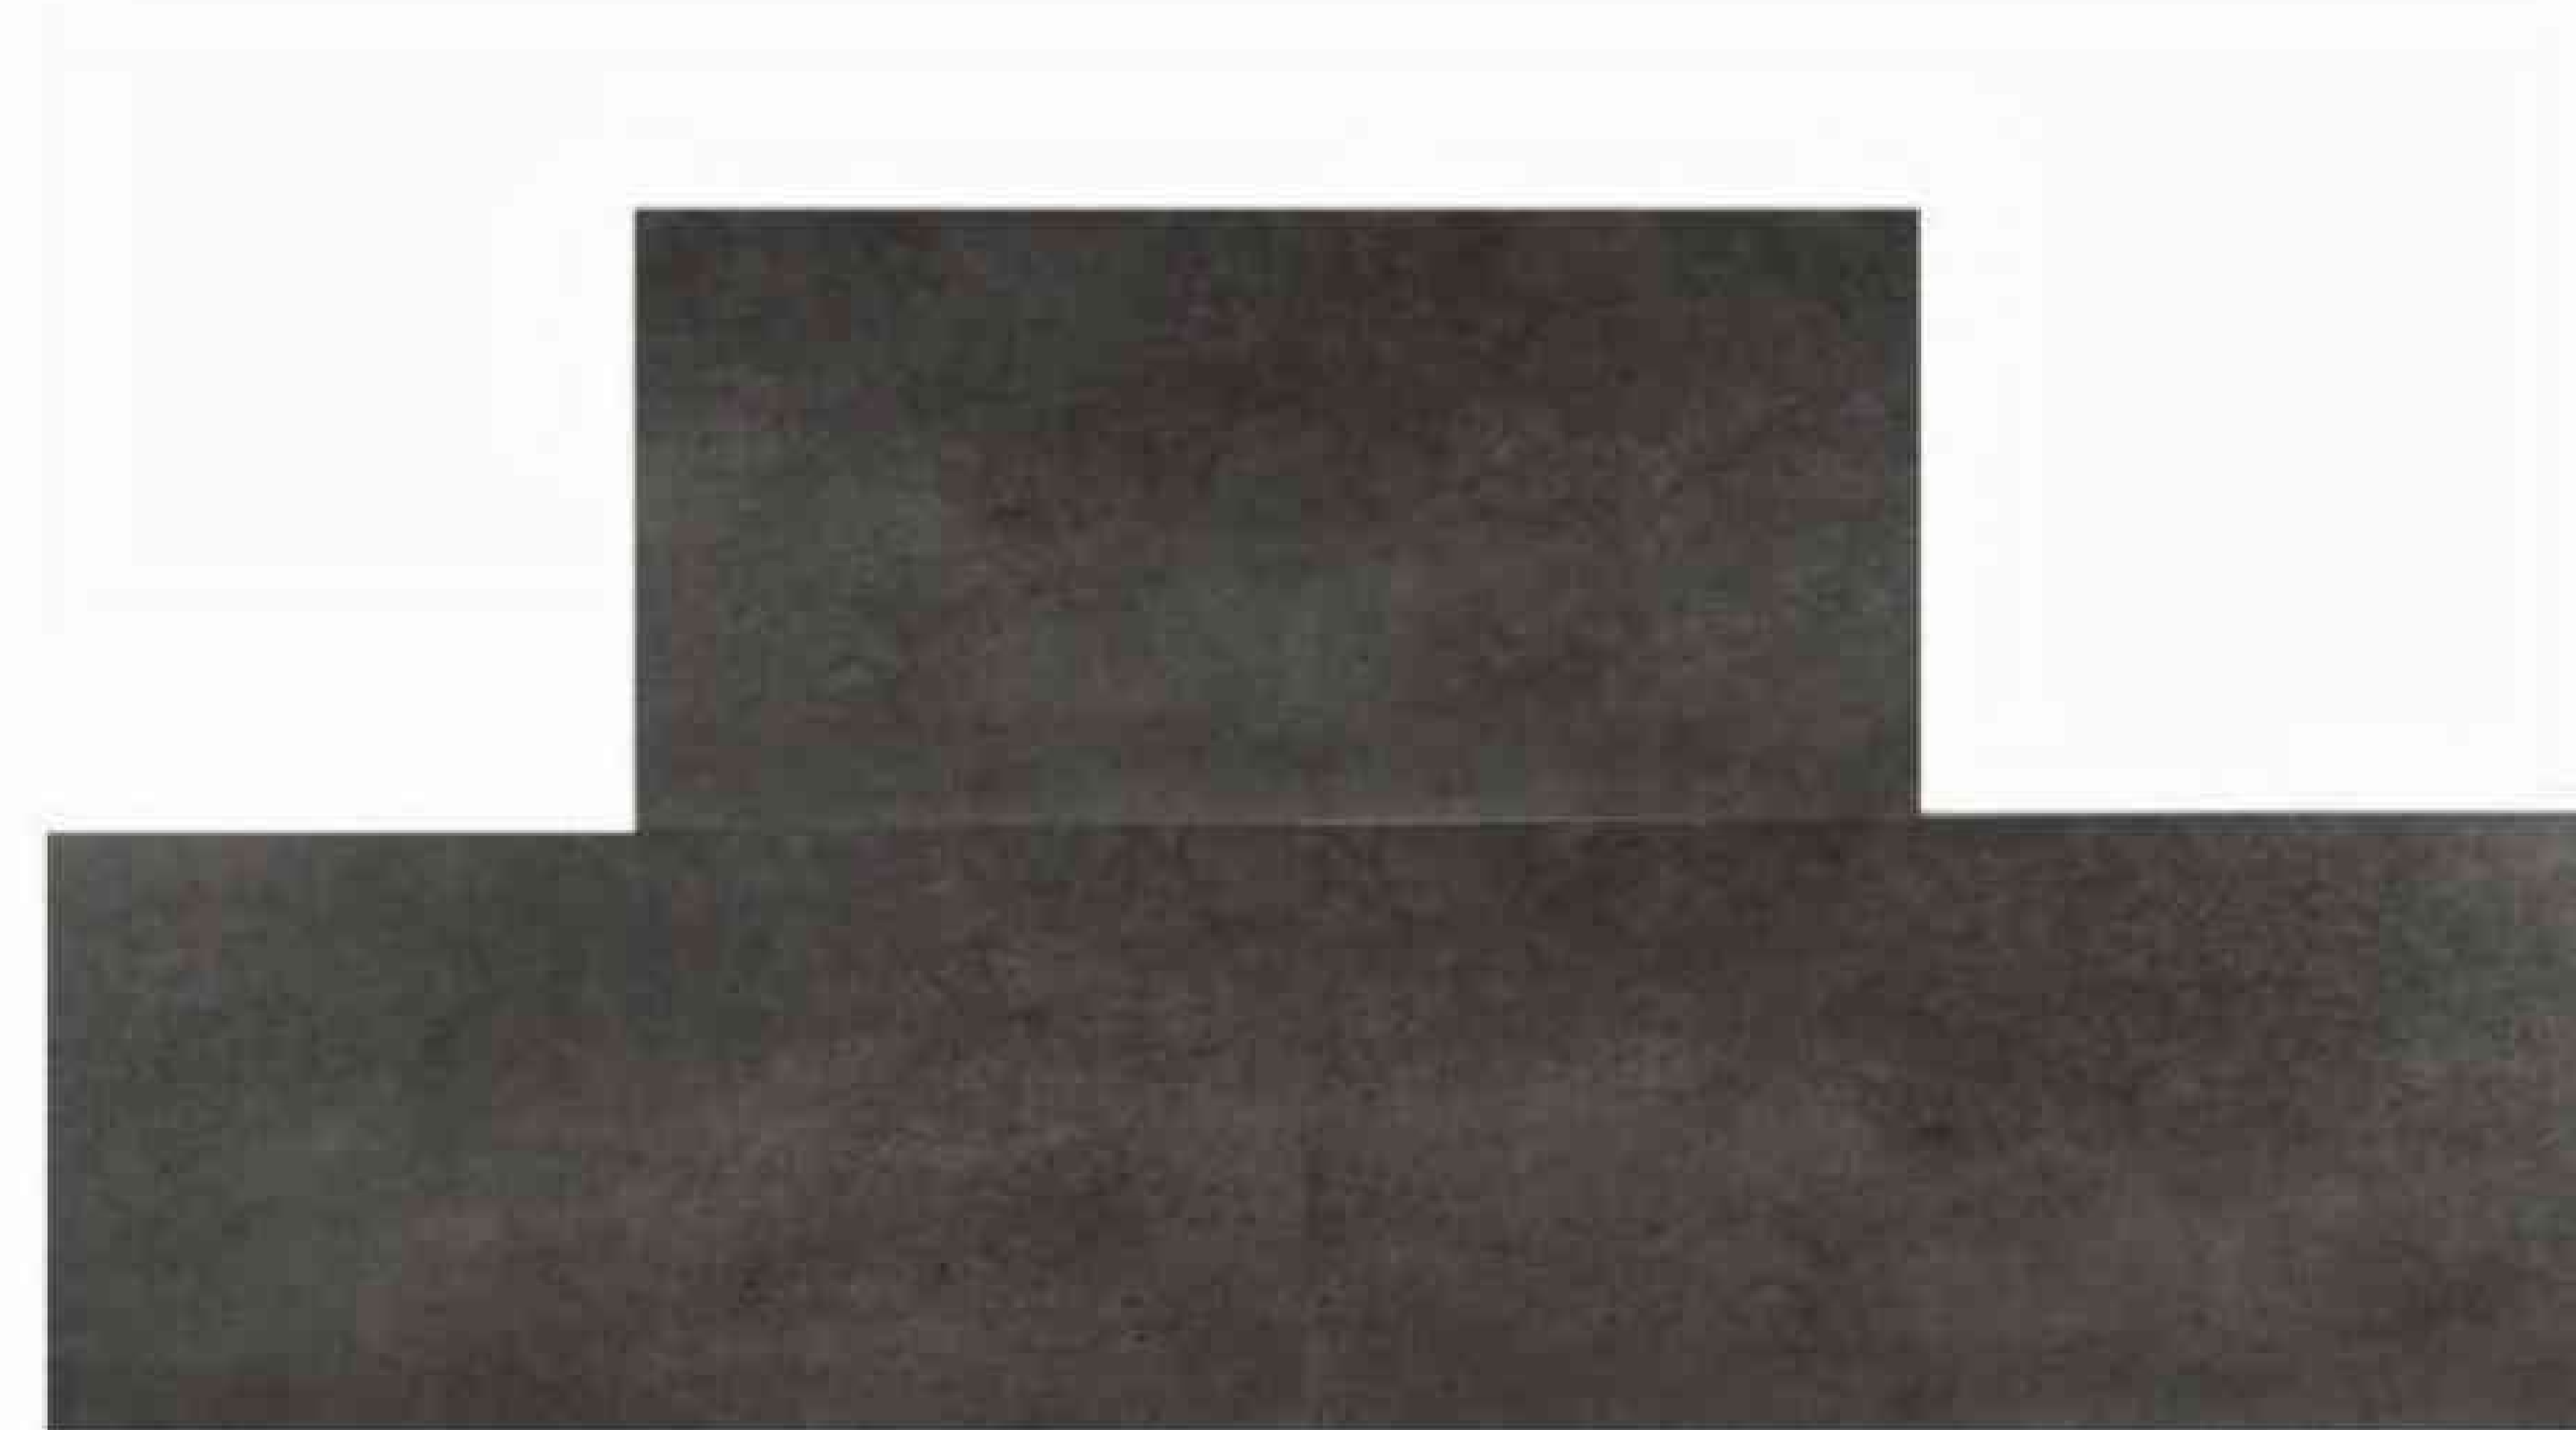

107-6

Colors & Patterns: Wood Texture



AW0032




AW0005



AW0006



AW0015

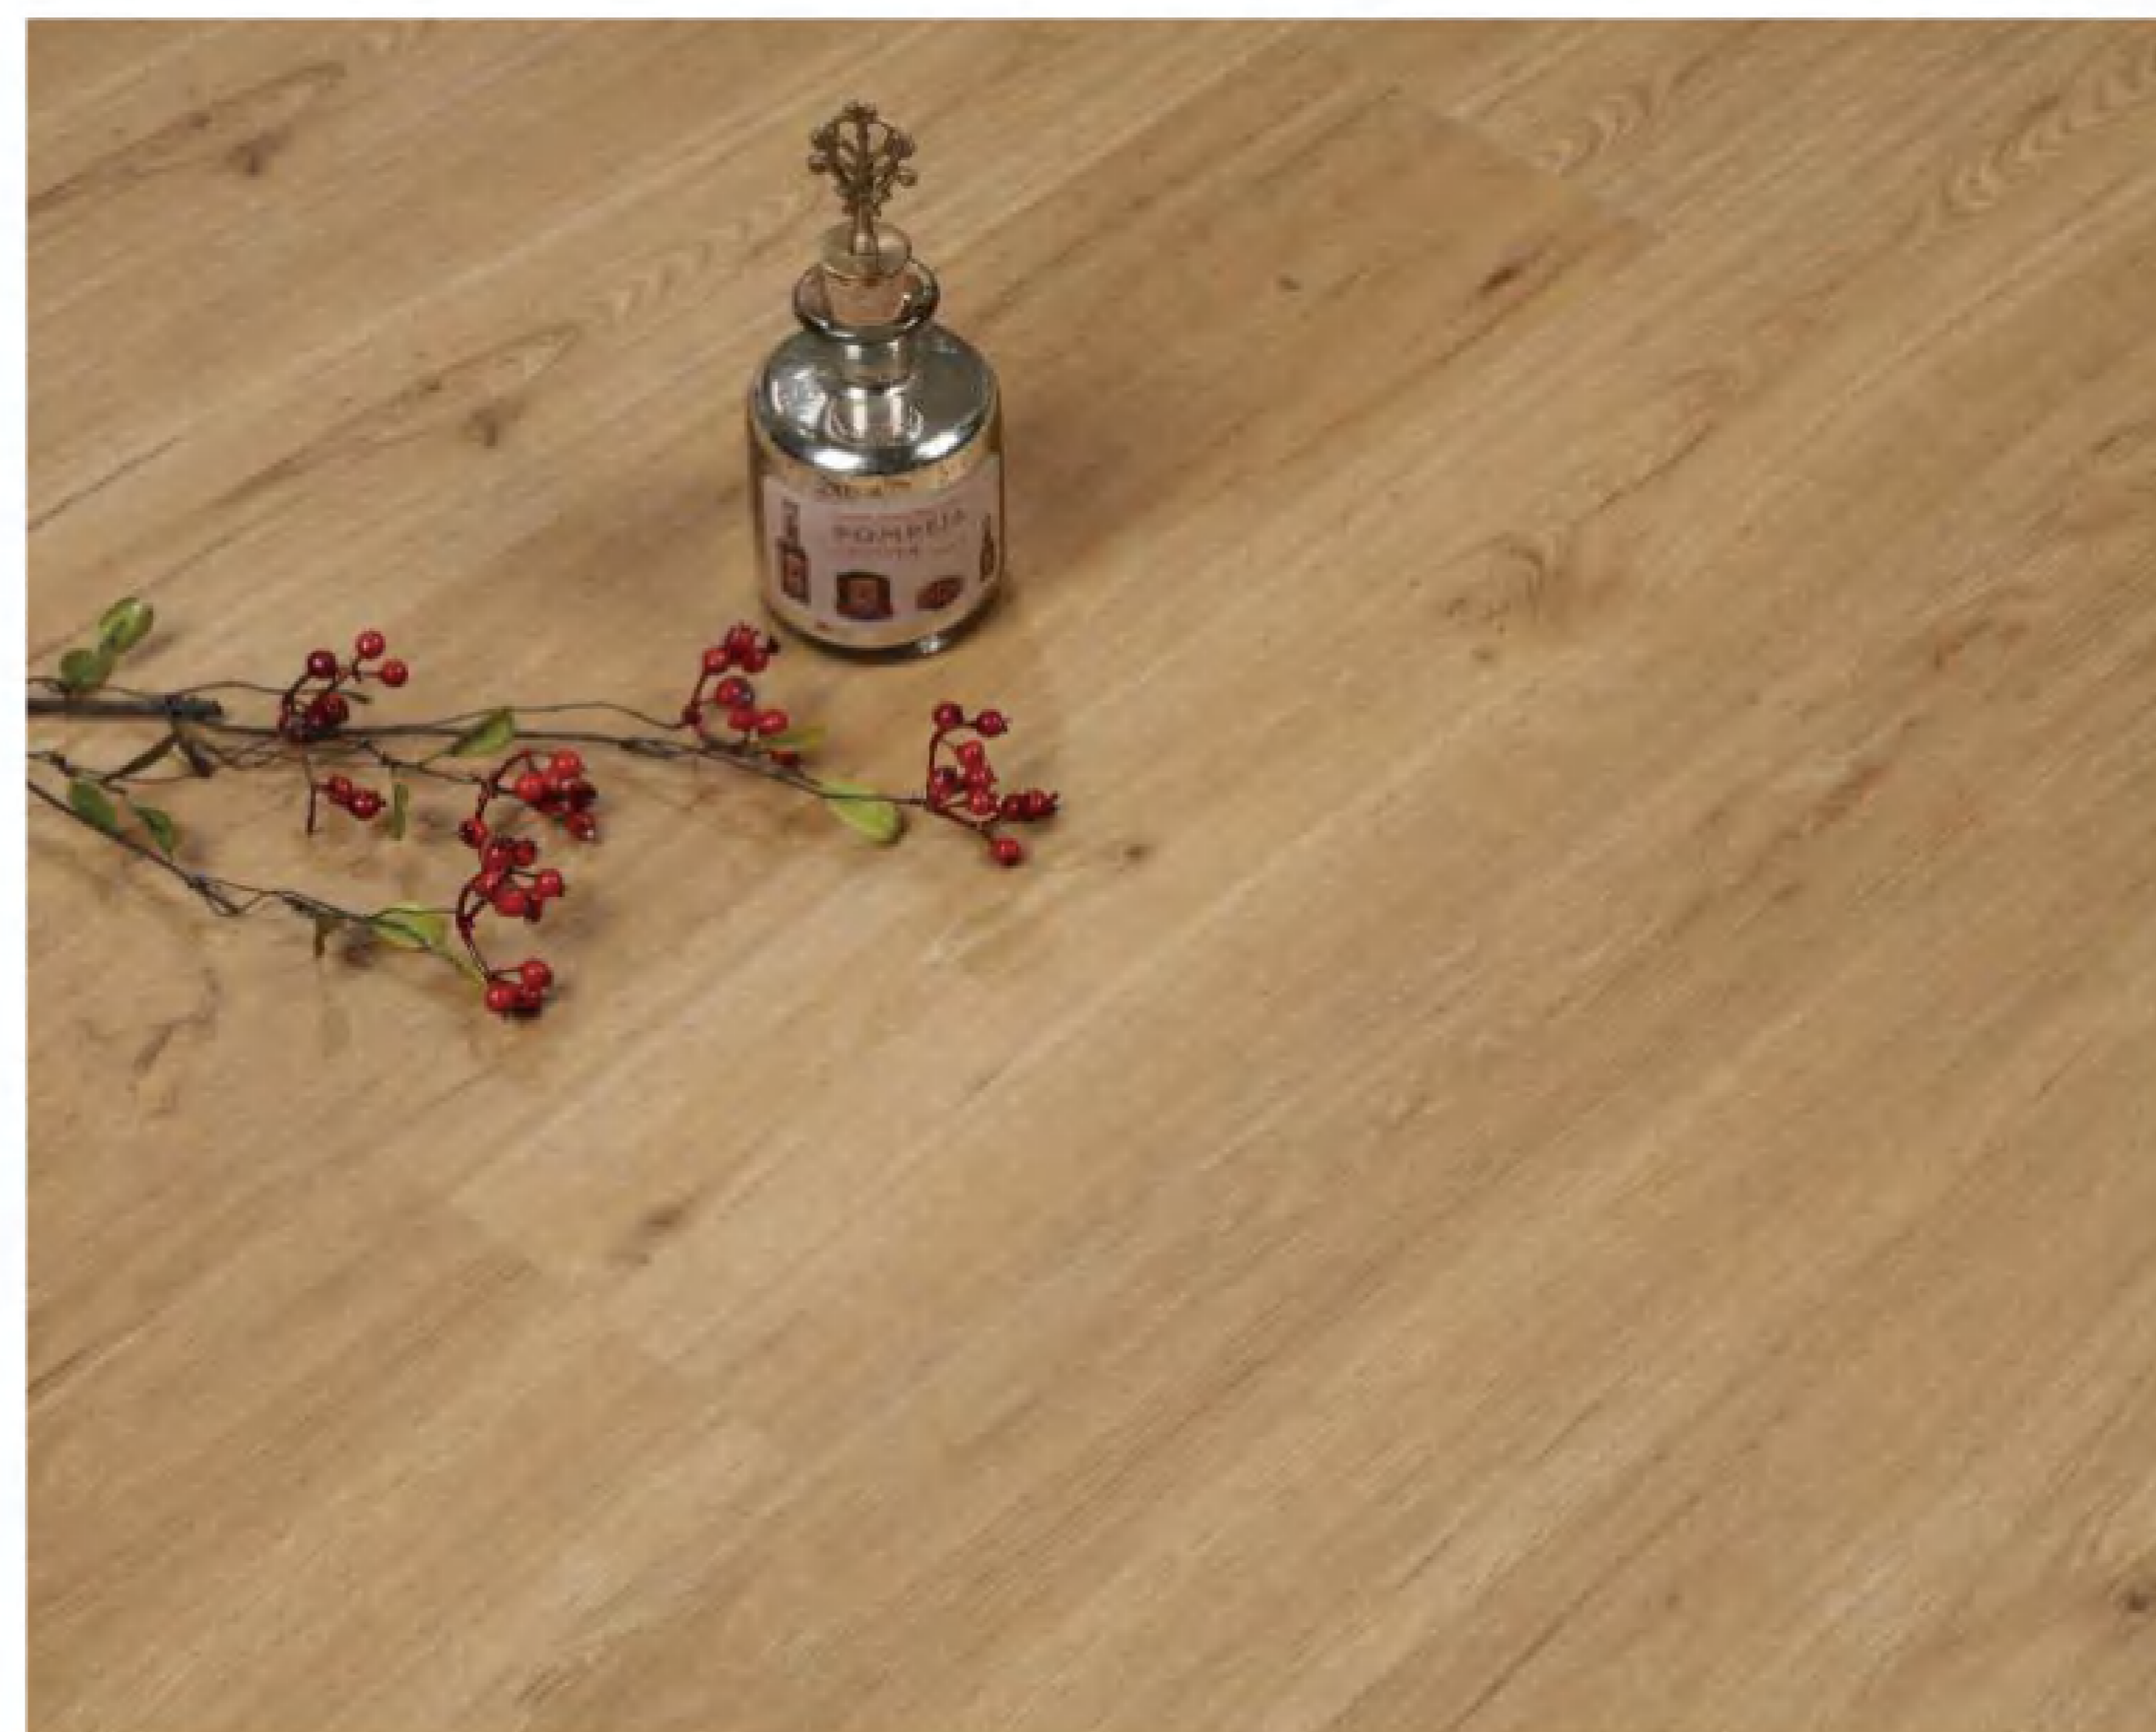

AW0021



AW0034

Colors & Patterns: Wood Texture



AW0001



AW0024



AW0008



AW0009



AW0022



AW0027

Colors & Patterns: Wood Texture



AW0020



AW0019




AW0030



AW0025



AW0029

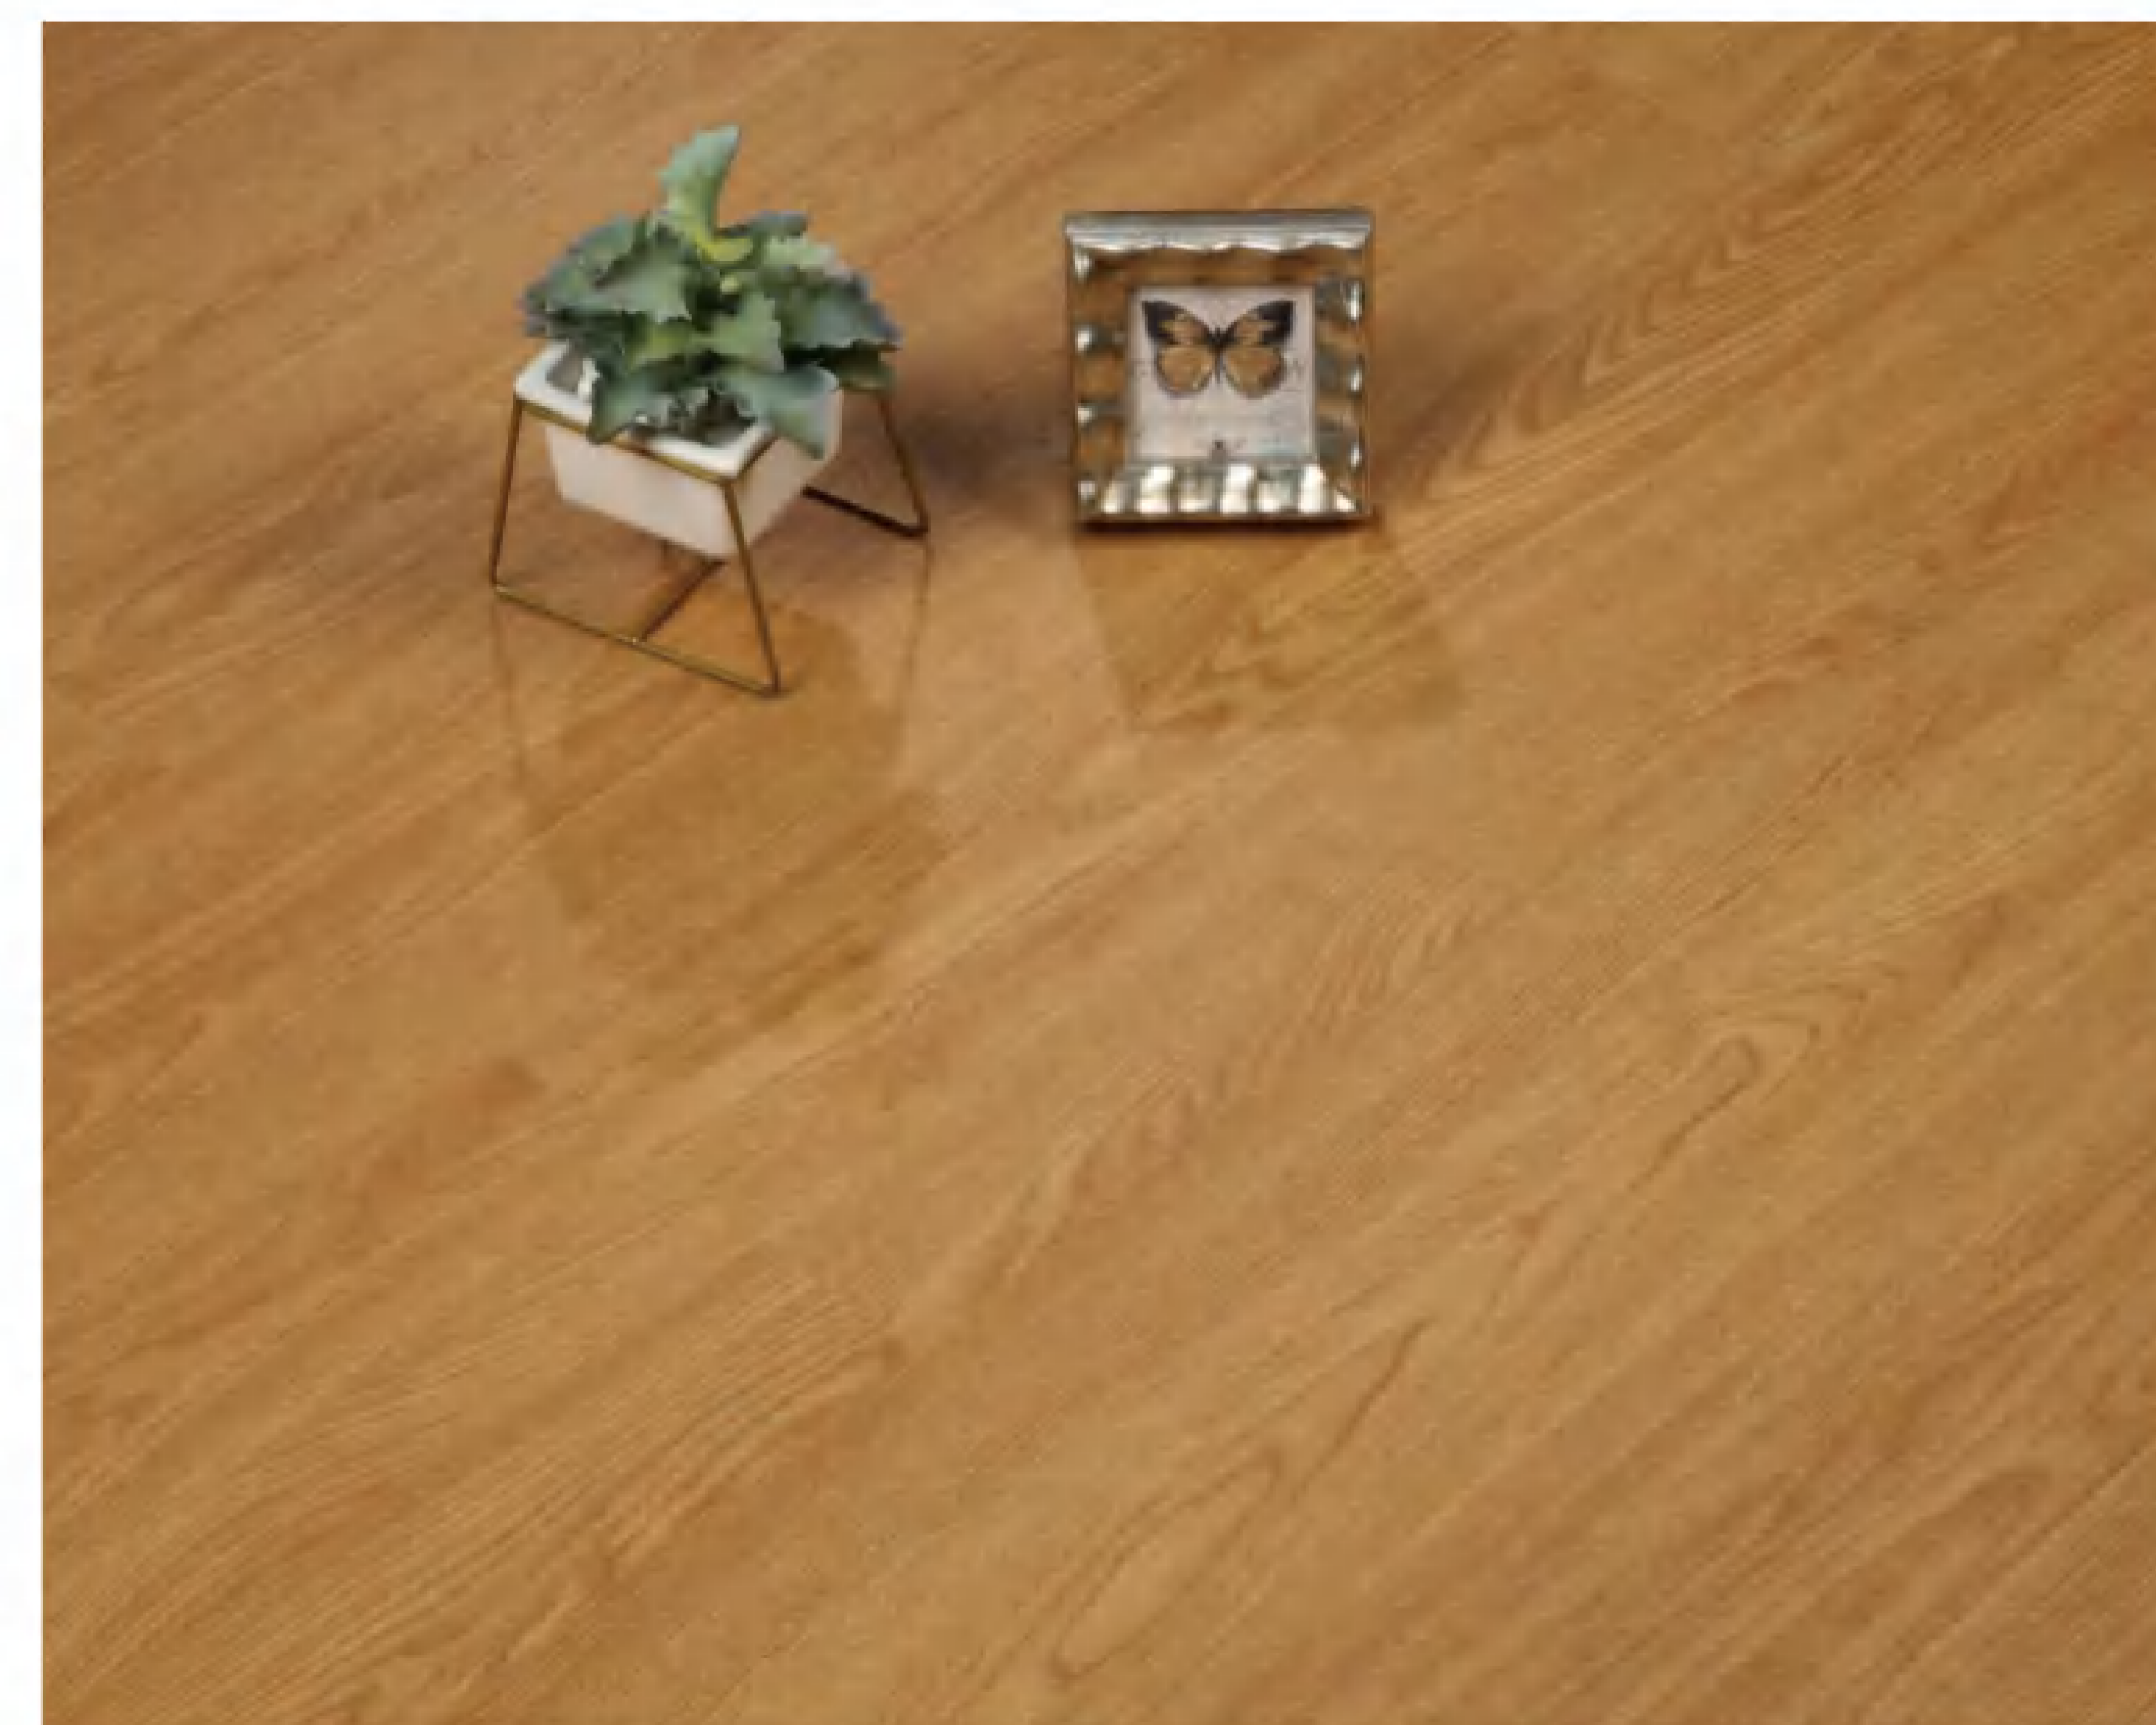


AW0026


Floor Usage




Installation Methods

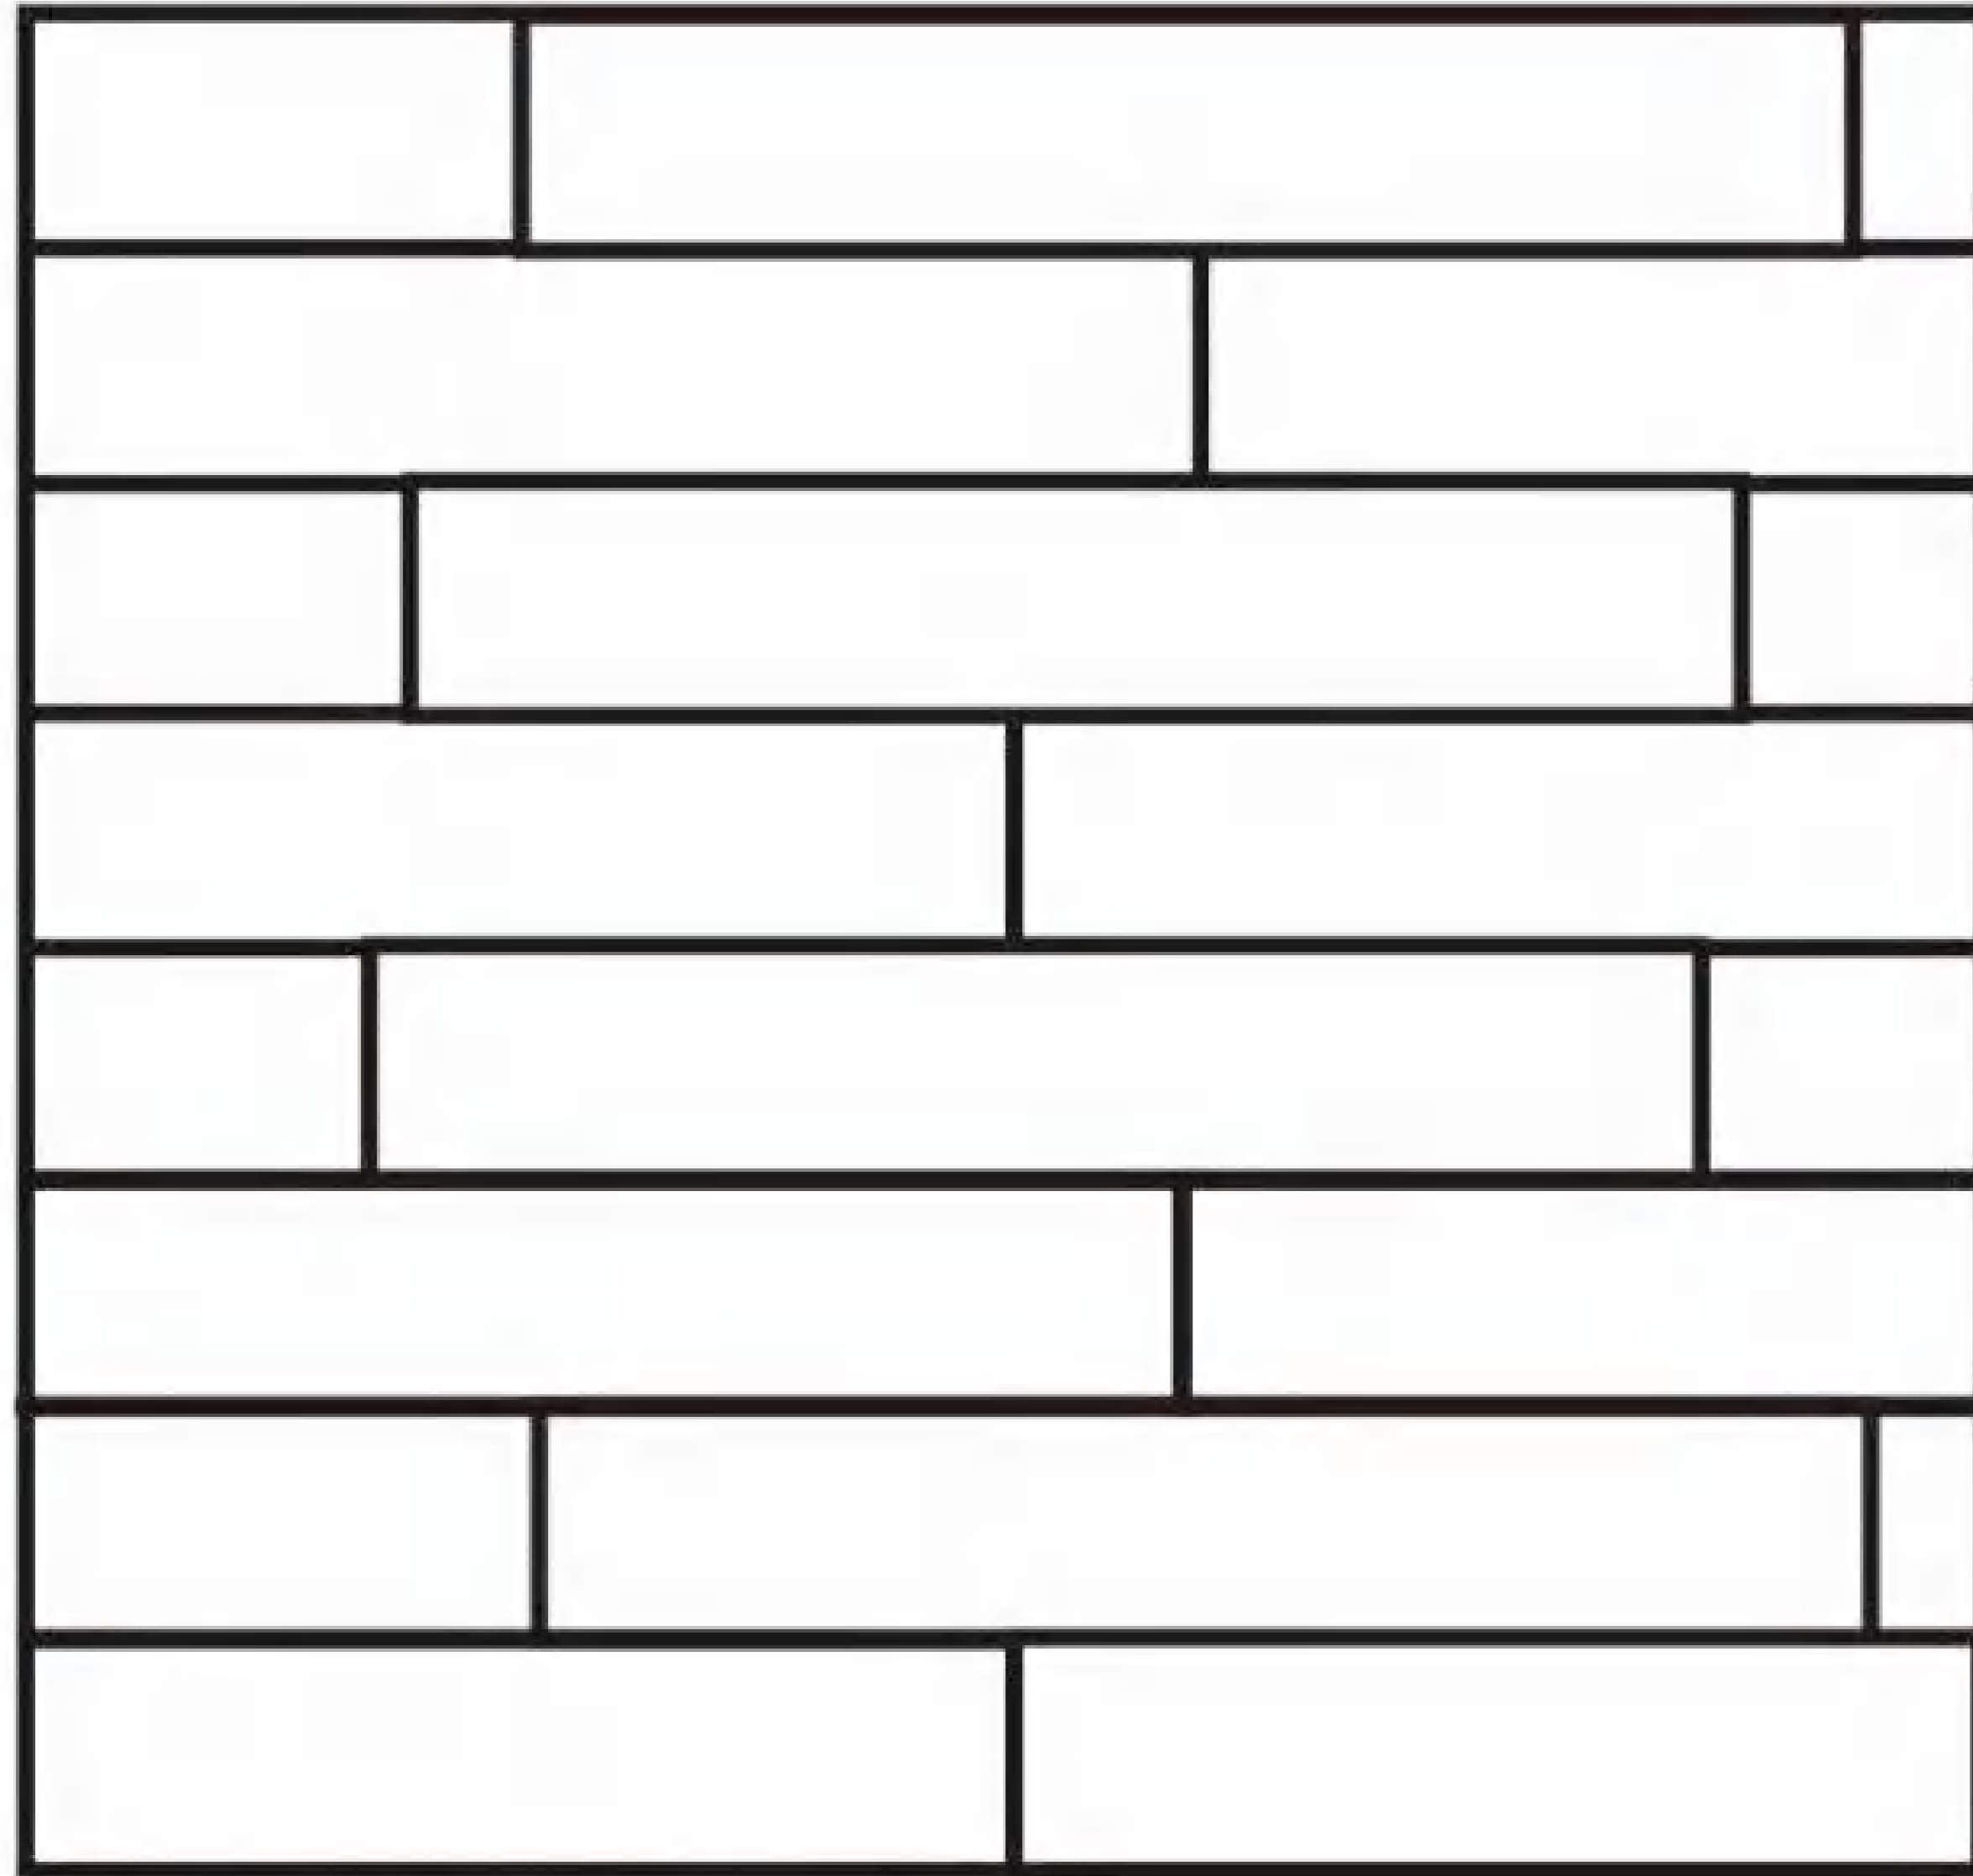


90°RANDOM

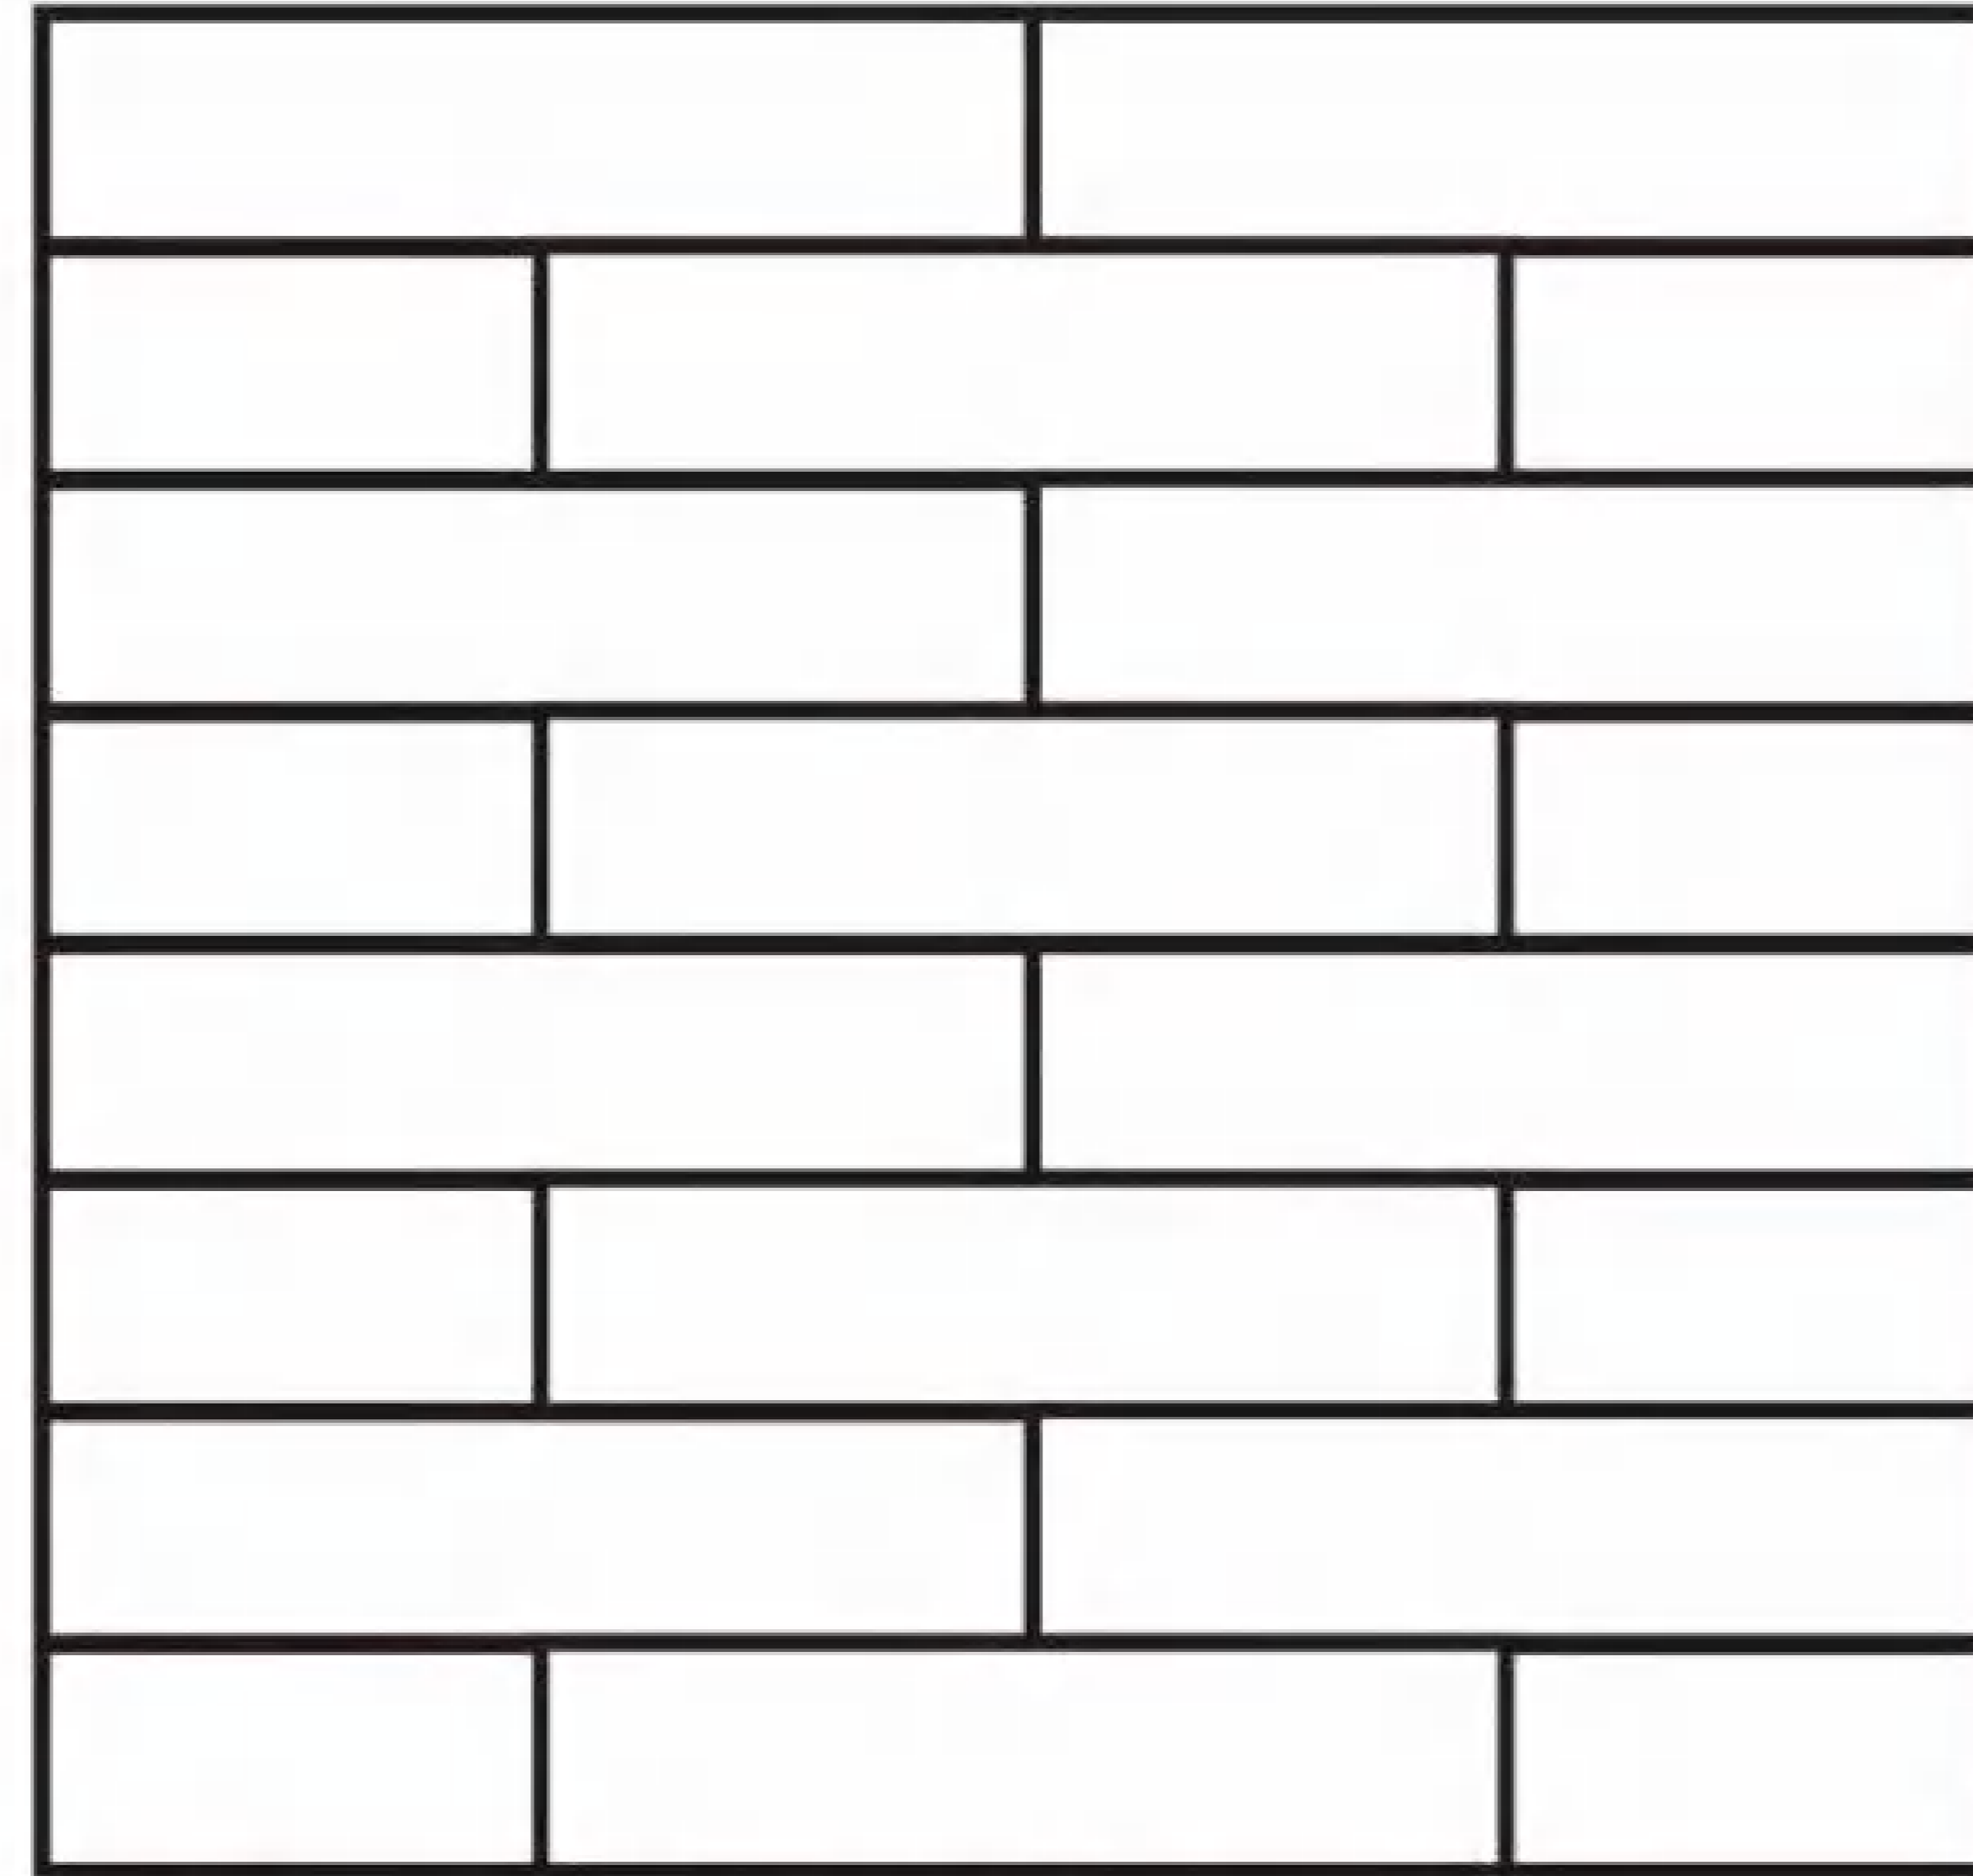


90°SUBWAY STYLE

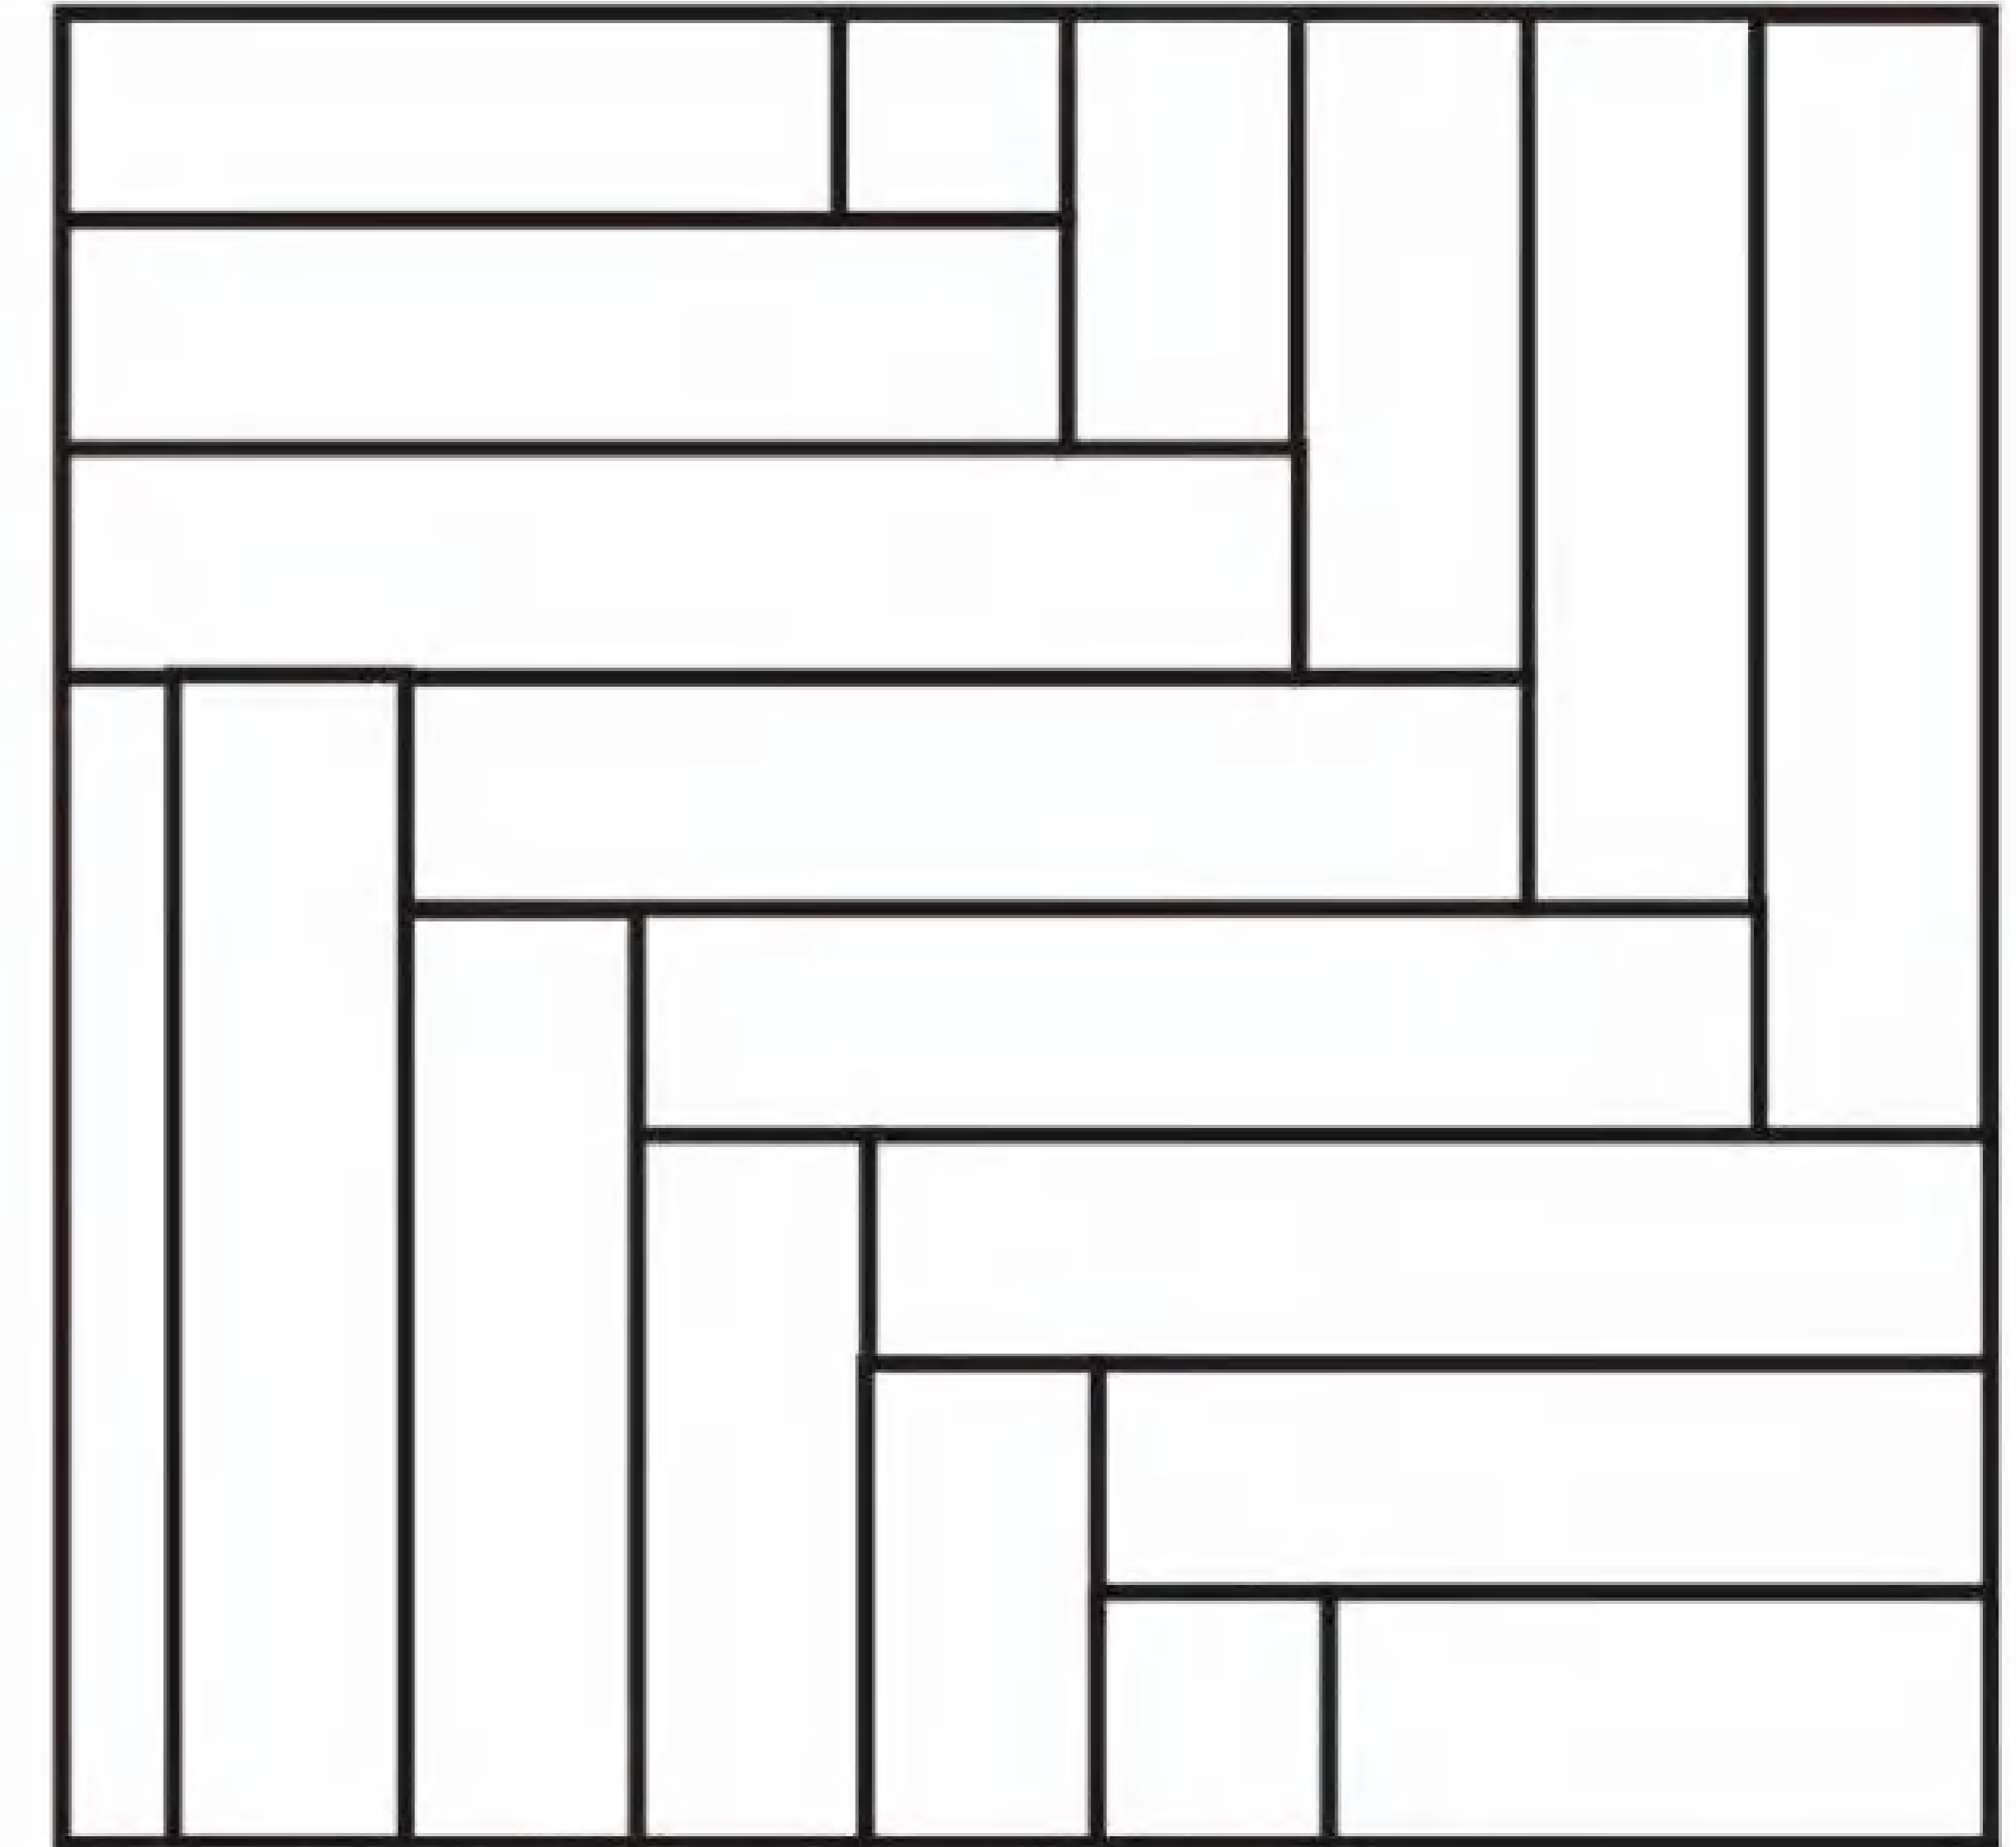


90° HERRINGBONE*

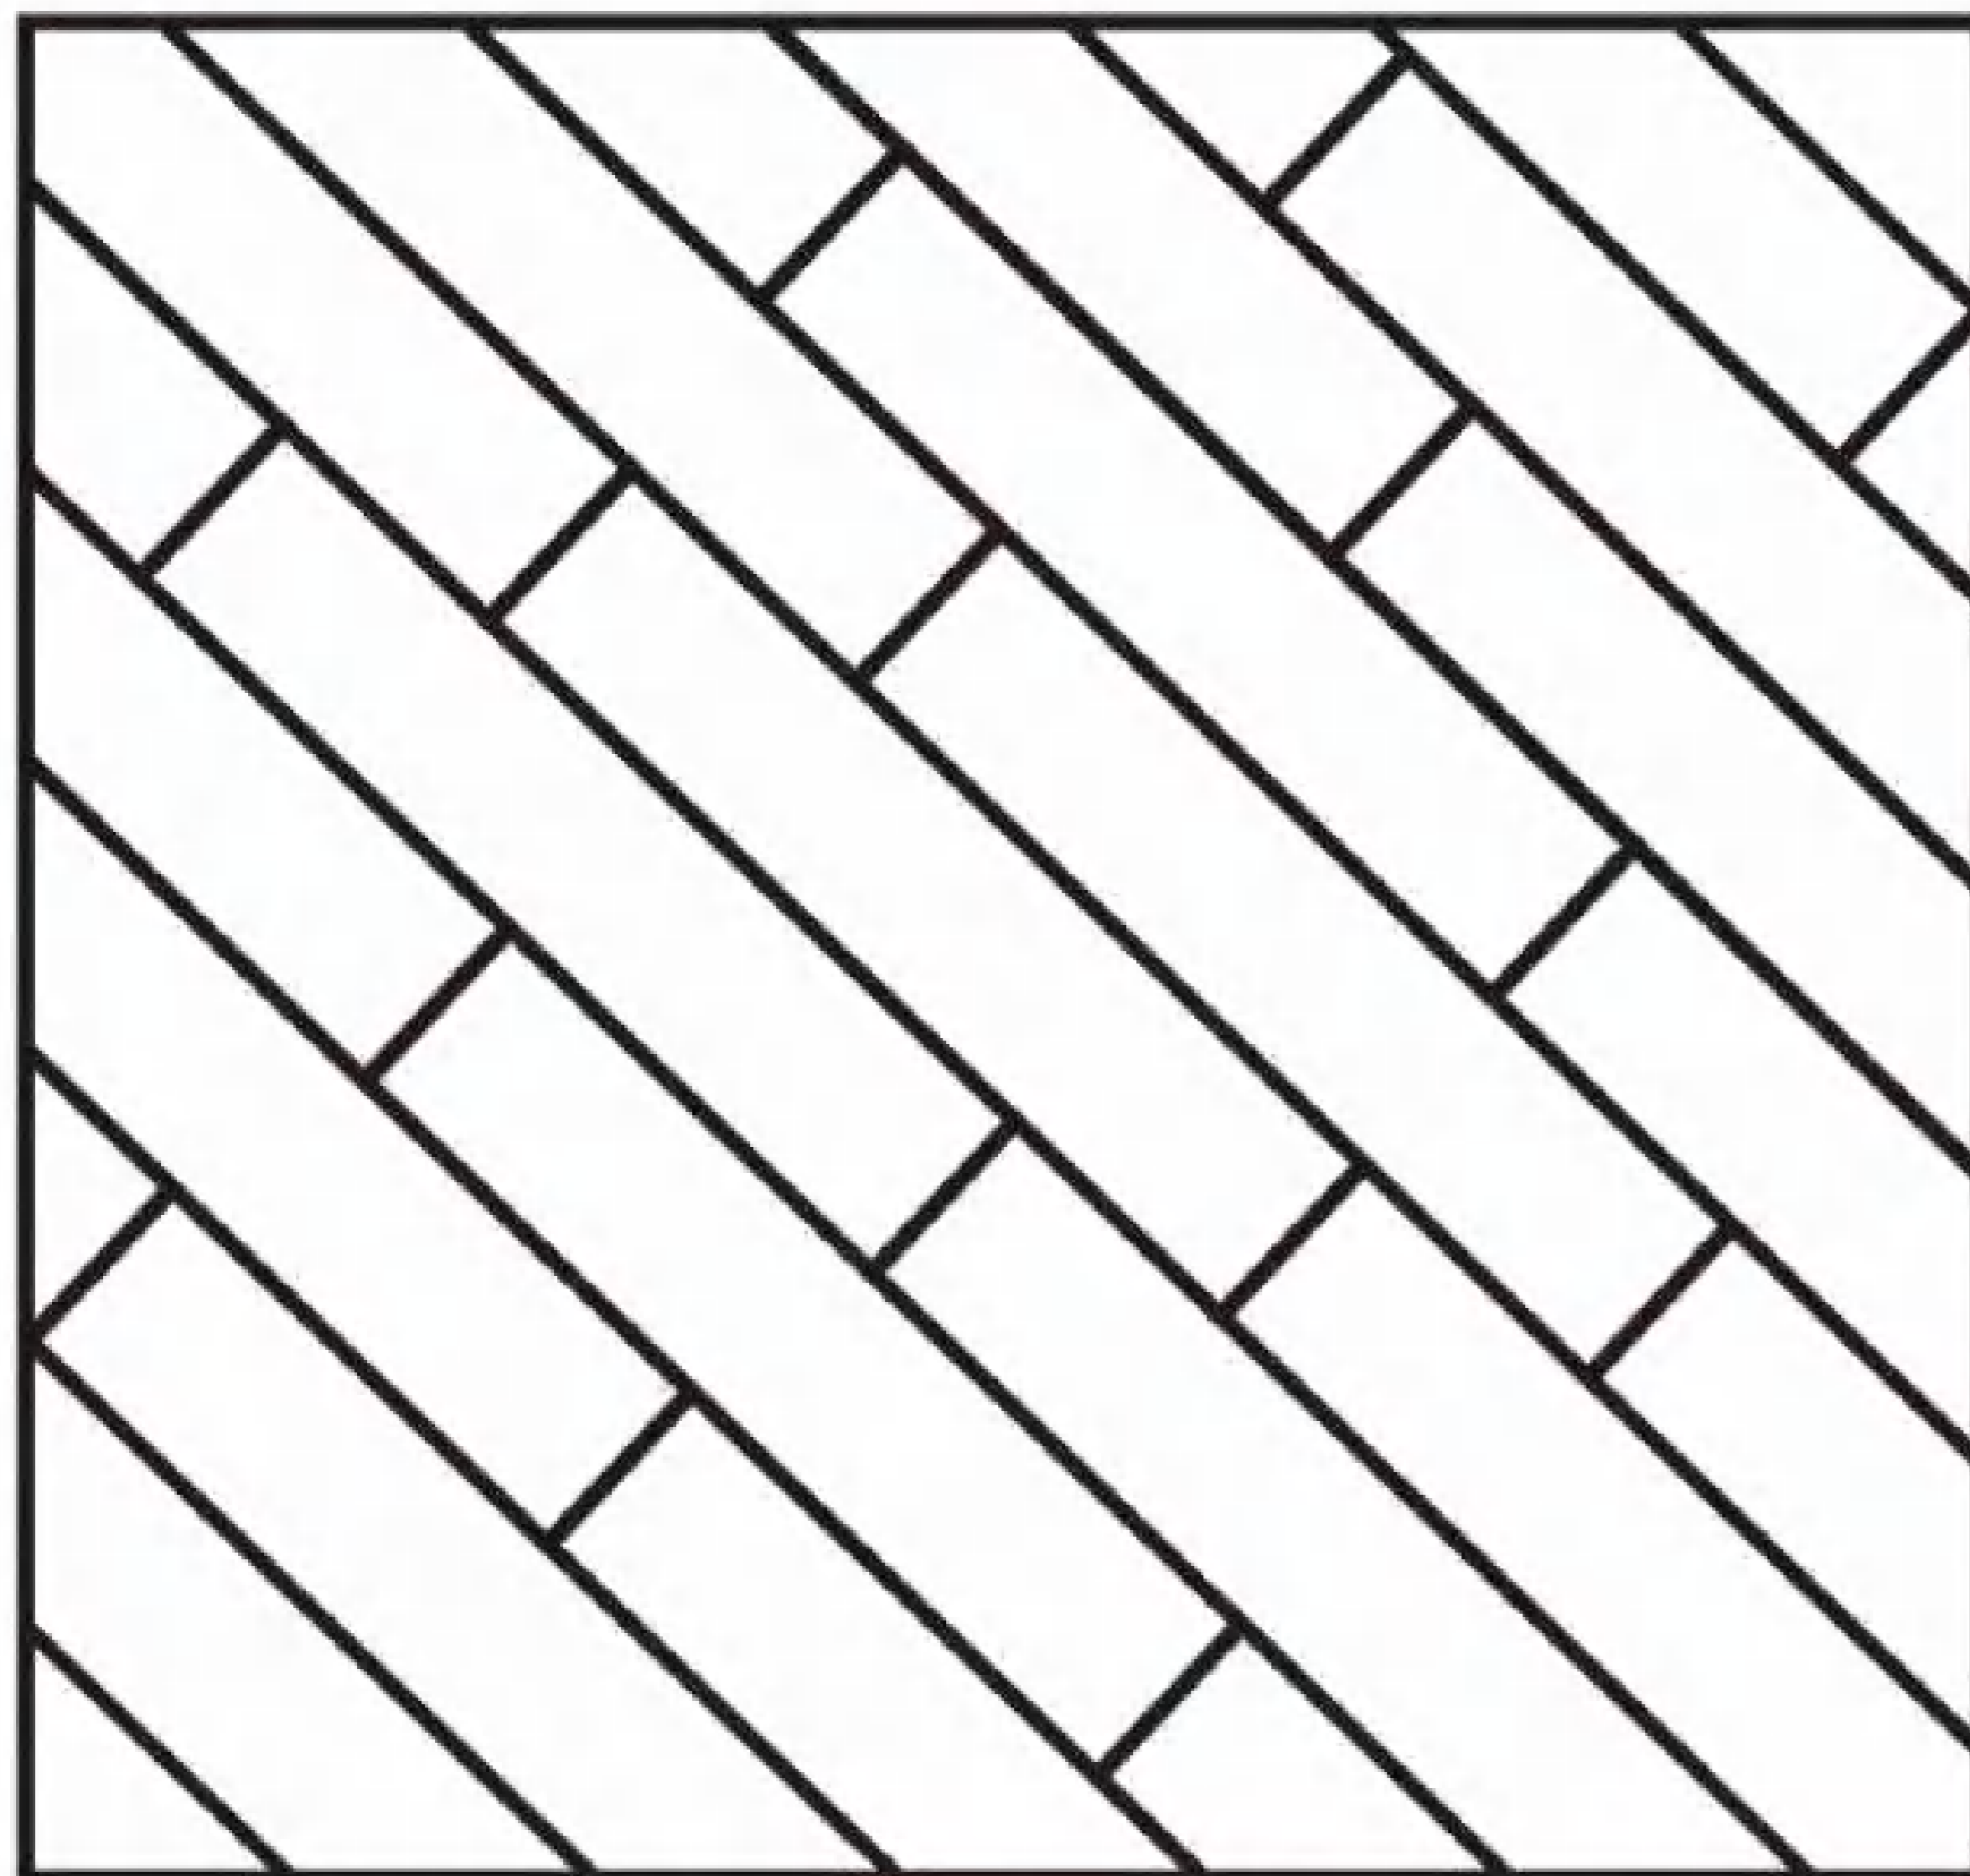

45°RANDOM

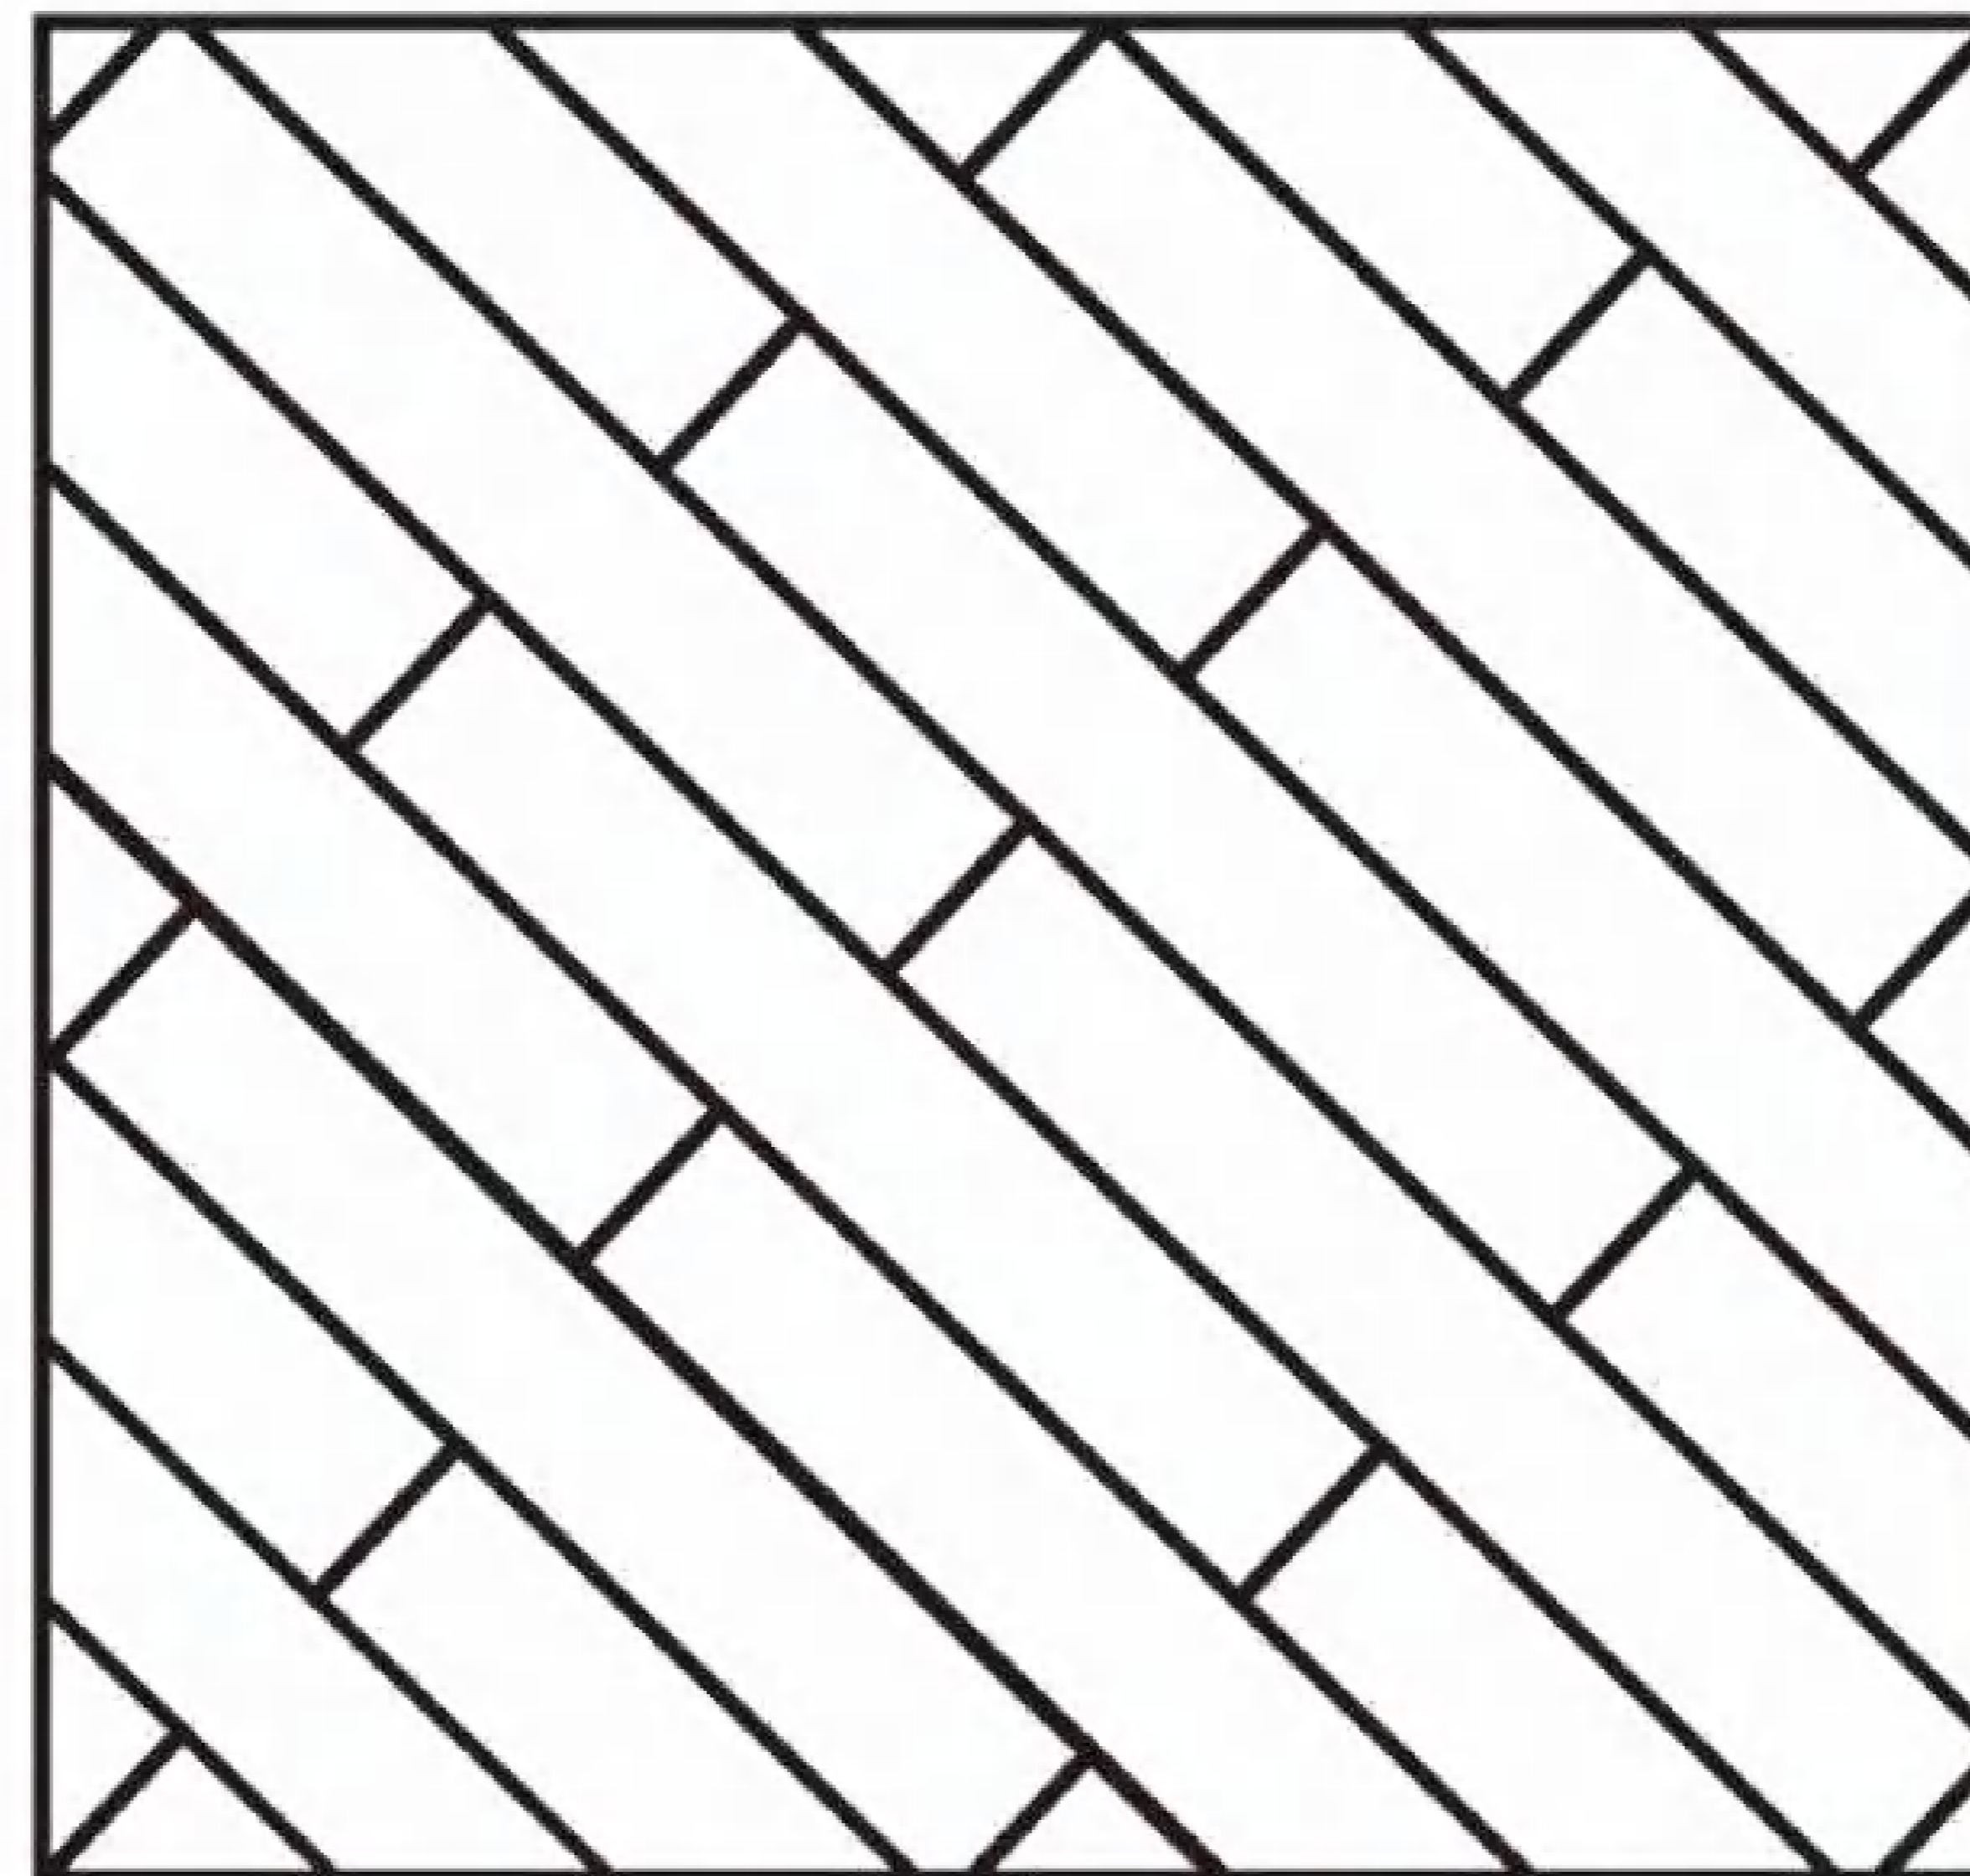

45°SUBWAY STYLE

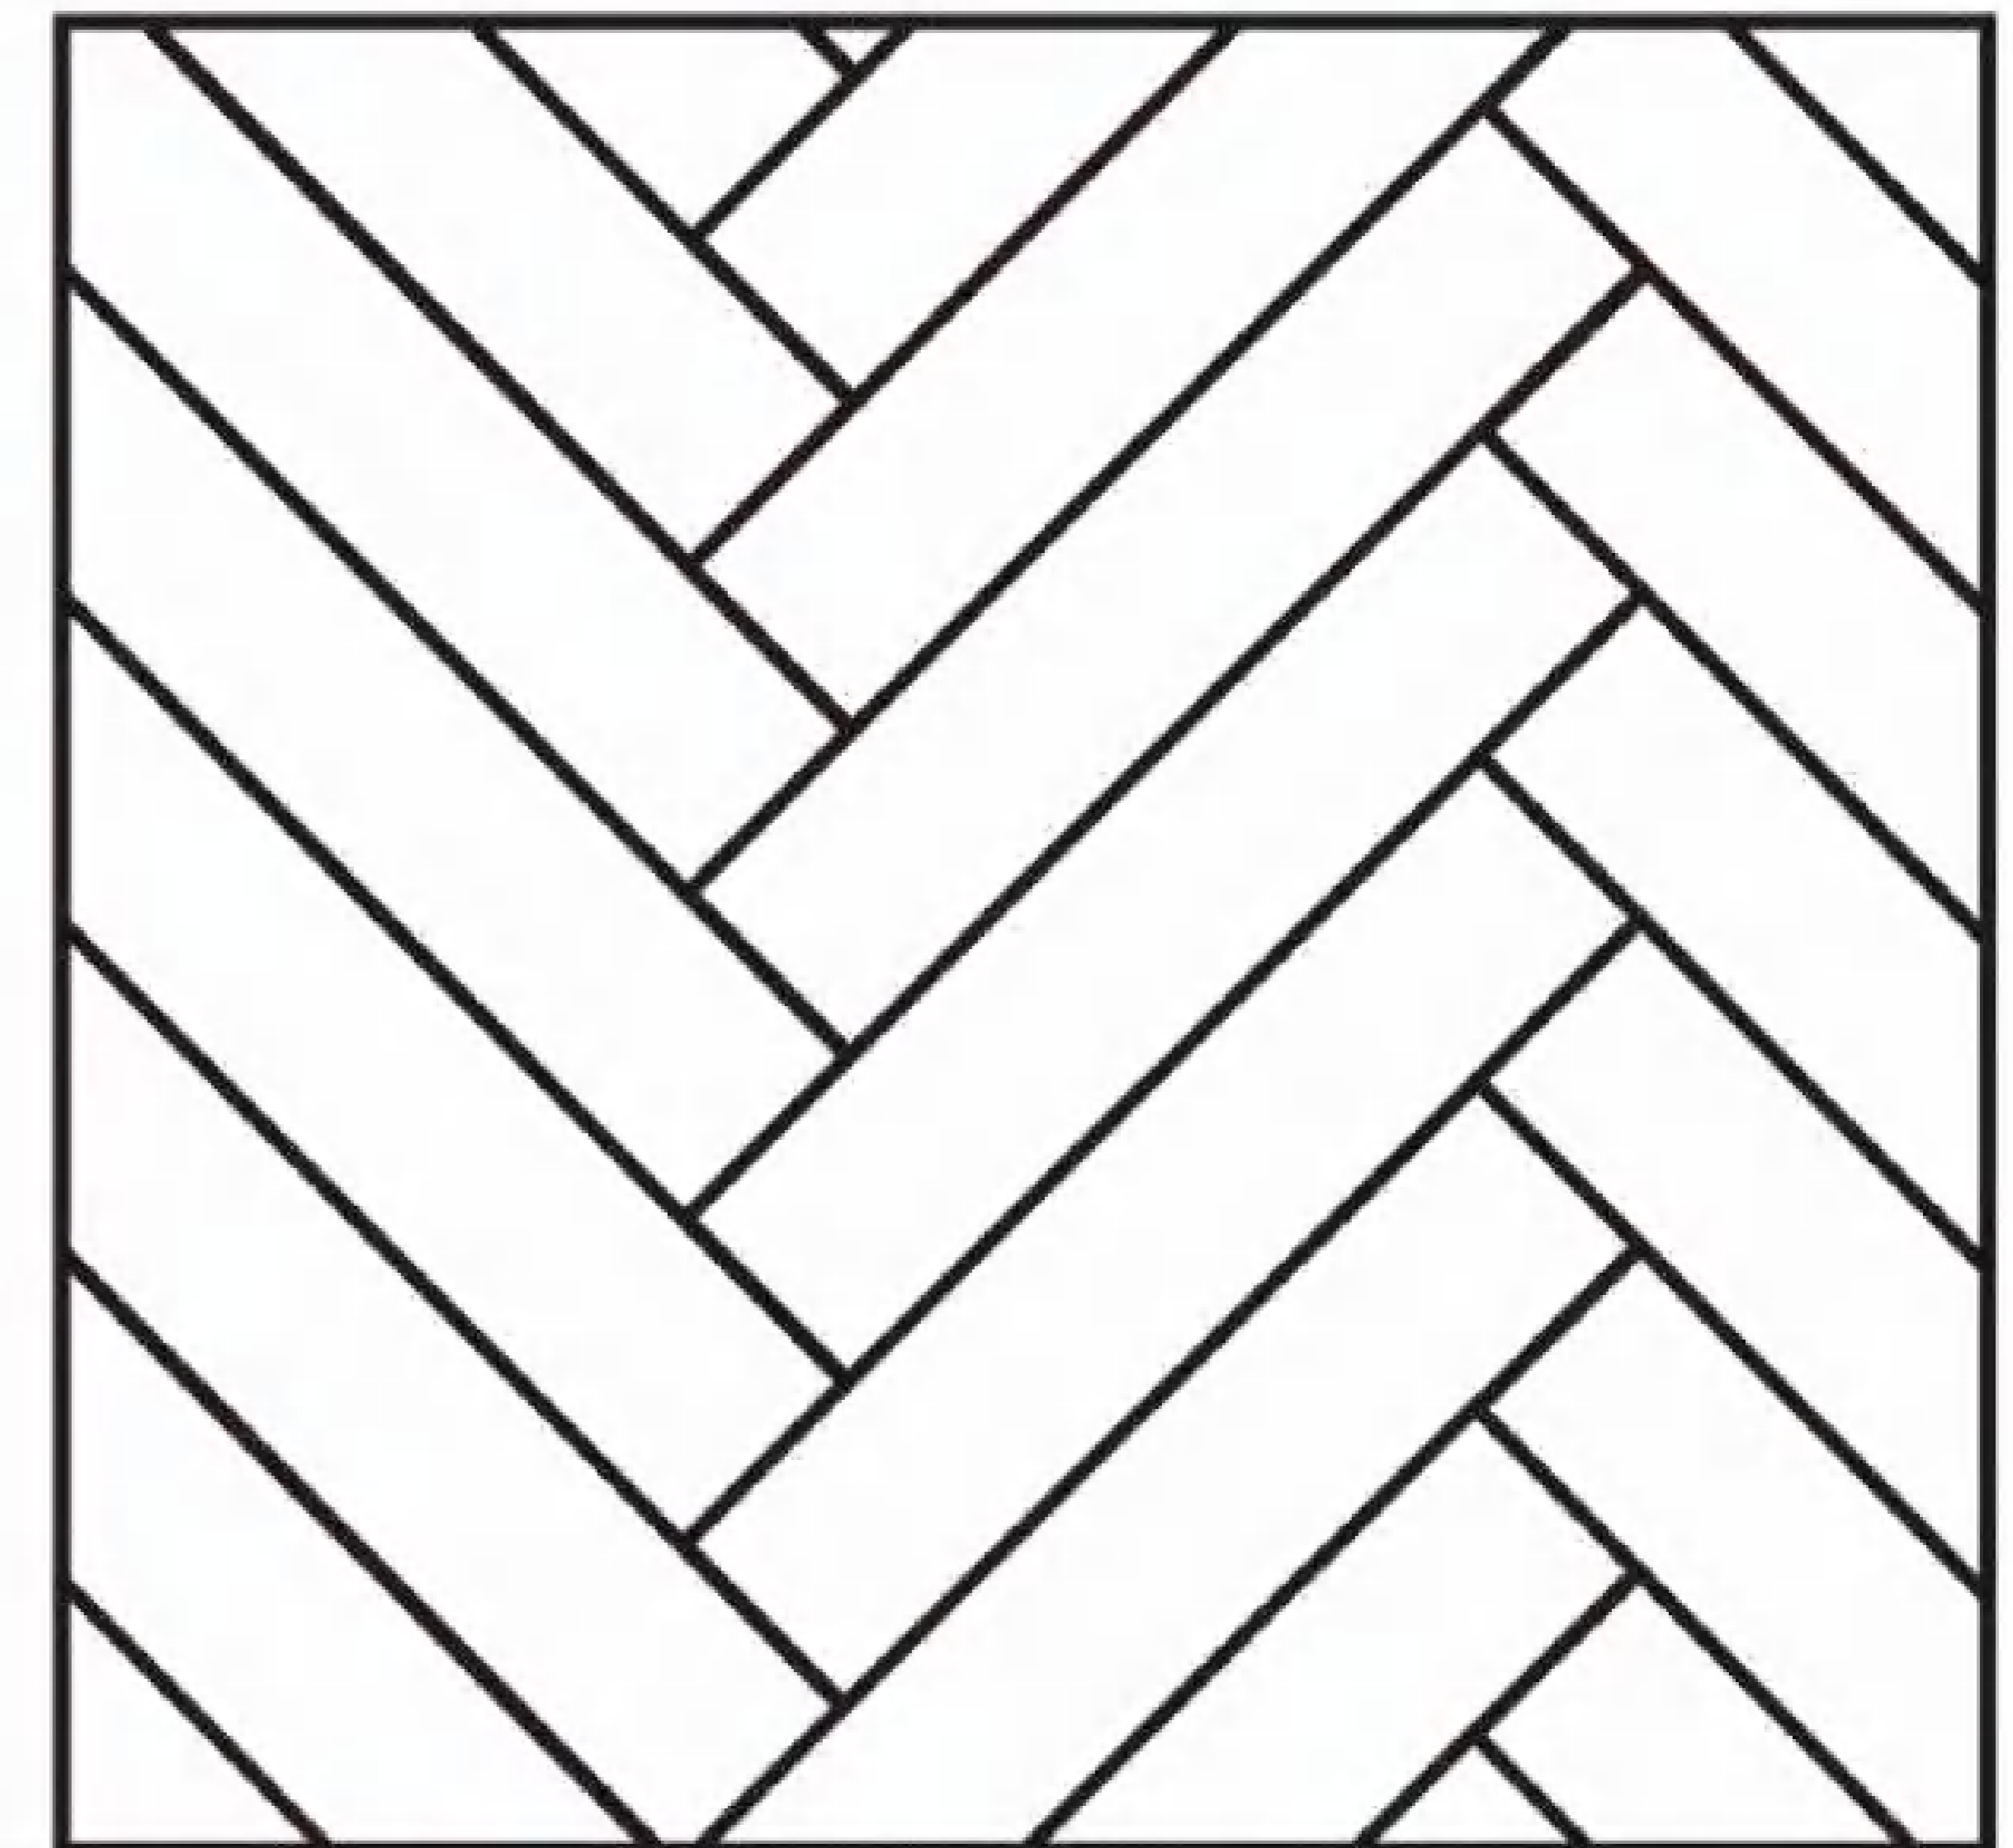


45° HERRINGBONE*

Customer Cases



Customer Cases

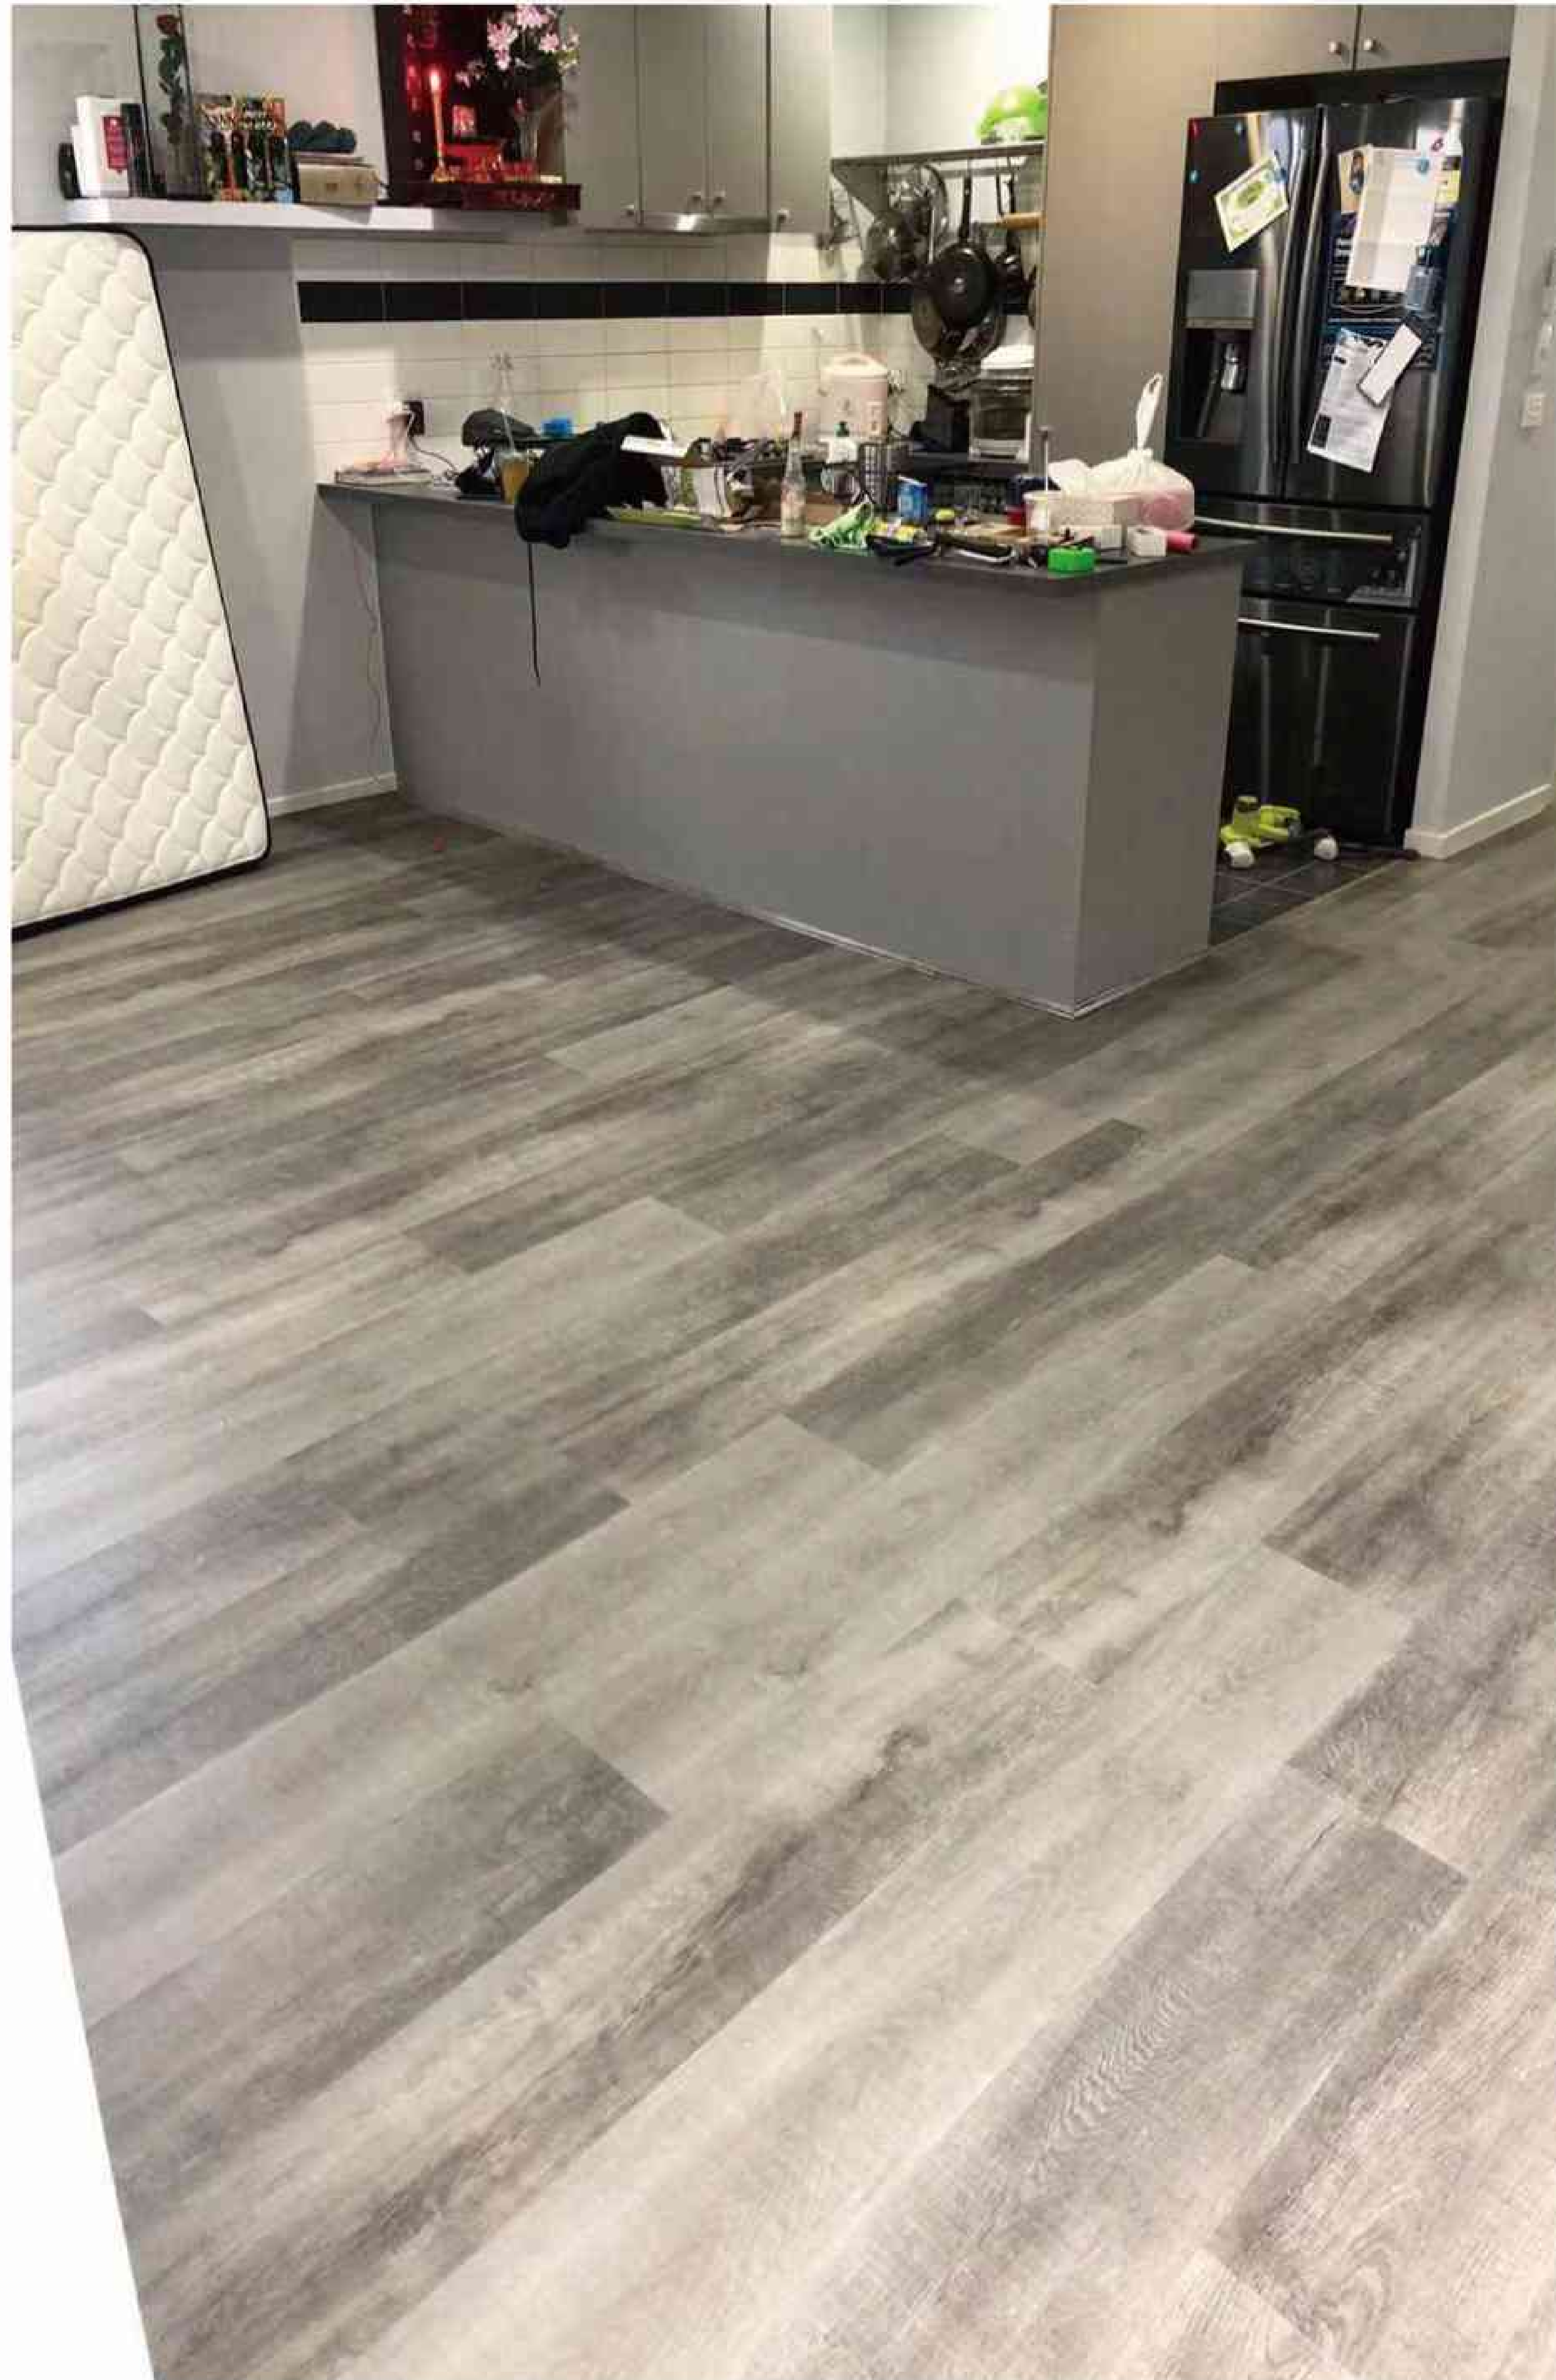

Accessories



Floor cutter

SPC



PVC



Skirting

Add: No.110, East Changhong Road, Wujin District,
Changzhou, Jiangsu, China

Contact Number: +86-18961419868

Email: tony@czanyway.com

Web: www.anywayflooring.com

